



Toll Free: 87 PERMATEX  
(877-376-2839)

6875 Parkland Boulevard, Solon  
Ohio 44139

## Technical Data Sheet

# Permatex® Throttle Body Carb & Choke Cleaner

AAM Revised 02/19

### PRODUCT DESCRIPTION

Permatex® Throttle Body Carb & Choke Cleaner is a blend of solvents specifically formulated to dissolve and clean the residue deposited on carburetors and chokes during the normal operation of a motor vehicle or other gasoline engine powered equipment. VOC compliant in all 50 states.

### PRODUCT BENEFITS


- Super jet spray cuts and removes grease and varnish
- OEM certified
- Oxygen sensor safe
- Improves engine performance
- VOC (50 state) compliant

### TYPICAL APPLICATIONS

- Carburetors
- Throttle Bodies
- Manual and automatic chokes
- Linkages
- Heat risers
- PCV valves

### DIRECTIONS FOR USE

1. Provide adequate ventilation.
2. Shut engine off.
3. Protect painted surfaces from overspray.
4. Shake can thoroughly before use. Note: There is no ball agitator inside the can. For best results, aerosol can should be at room temperature before spraying.
5. Holding can 8 to 10 inches from the surface for open area cleaning, or 5 inches using the extension tube provided for hard to reach areas, press the nozzle and discharge the product on the assembly.

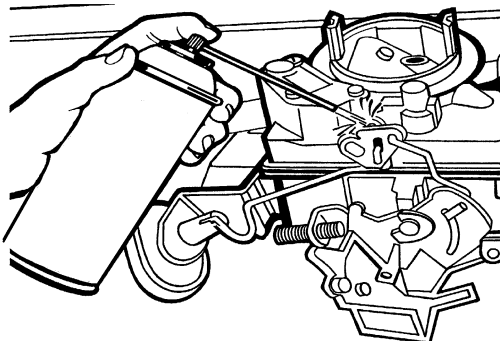

6. **Carburetor:** Spray carburetor inside and out covering all parts. Repeat application if necessary.
7. **Automatic Choke:** Mark indicator plate before removing. Spray directly into choke housing on spring and other parts. Repeat application if necessary. Wipe dry. Reinstall parts with indicator plate in original position.

### For Cleanup

1. Clean hands with Permatex® brand hand cleaners.

### PROPERTIES OF MATERIAL

	Typical Value
Chemical Type	Aromatic ketone blend
Appearance	Clear liquid
Odor	Solvent
Specific Gravity	0.8
Flash Point	Aerosol, contents under pressure, consult MSDS

### GENERAL INFORMATION

**This product is not recommended for use in pure oxygen and/or oxygen rich systems and should not be selected for use with chlorine or other strong oxidizing materials.**

**For safe handling information on this product, consult the Material Safety Data Sheet, (MSDS).**

### ORDERING INFORMATION

Part Number	Container Size
80279	12 oz. net aerosol can

### STORAGE

Products shall be ideally stored in a cool, dry location in unopened containers at a temperature between 8° and 28°C (46° and 82°F) unless otherwise labeled. Optimal storage is at the lower half of this temperature range.

### NOTE

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. **Permatex, Inc. specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Permatex, Inc. products and disclaims any liability for consequential or incidental damages of any kind, including lost profits.** This product may be covered by one or more United States or foreign patents or patent applications.

NOT FOR PRODUCT SPECIFICATIONS.  
THE TECHNICAL DATA CONTAINED HEREIN ARE INTENDED AS REFERENCE ONLY.  
PLEASE CONTACT PERMATEX, INC., TECHNICAL SERVICE DEPARTMENT FOR ASSISTANCE AND RECOMMENDATIONS FOR YOUR SPECIFIC APPLICATION.  
PERMATEX, INC., 6875 PARKLAND BOULEVARD, SOLON, OH 44139 PHONE - (1-877)PERMATEX