

Tail Gate Feeder Assembly Instructions

Figure 1

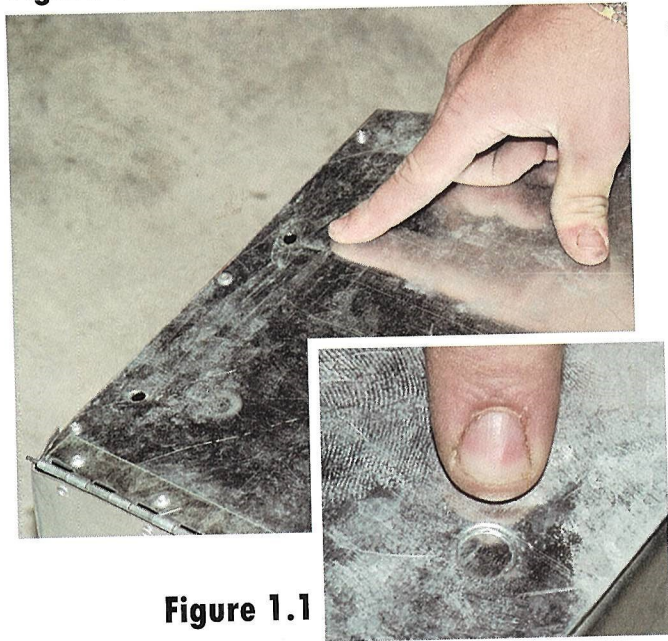


Figure 1.1

Step 1:

Locate the 2 small pre-punched holes on the back left and right edges of the feeder.

IMPORTANT:

The holes should be pre-punched.

See Figure 1.1

If they do not easily punch out with minimal effort, **DO NOT USE FORCE OR HAMMER.** Use a drill to drill out the hole.

PUNCH ONLY THE HOLES ON THE LEFT AND RIGTH EDGES FOR TAILGATE MOUNTING.

Center holes are for use with the Foreverlast Receiver Hitch Attachment (sold separately)

Figure 2



Figure 2.1

Step 2:

Position Bracket (Item 3) over the two holes on the **OUTSIDE** of the Feeder and Flat Bar (Item 4) over the two holes on the **INSIDE** of the feeder. The flat bar is only on 100lb. feeder. See FIGURE 2.

Secure Bracket and Flat Bar (100lb. feeder only) to Feeder using Bolt, Washer, Lock Washer and Nut Set (Item 2). Tighten with screwdriver and wrench. See FIGURE 2.1 and 2.2

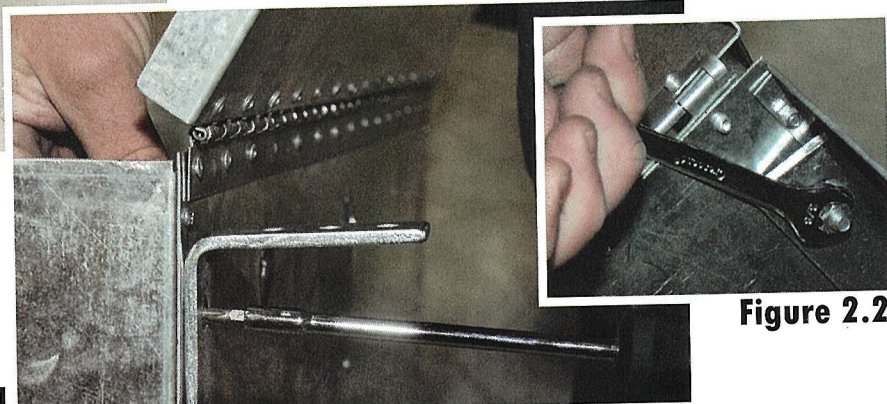


Figure 2.2