



# THE ULTIMATE IN HOME SECURITY GLOWFLEX LED RECHARGEABLE SAFE LIGHT

## INSTALLATION INSTRUCTIONS

### 1. CONTROL BOX - IMPORTANT:

- a. Select the location for the control box first. Typically, this is the lower right hand (hinge side) of the safe about 3" back from the front of the safe. This will allow you to align the control box with the LED tape and power cord (optional) while allowing the motion sensor to activate the LED tape when the safe door opens. Make sure there is nothing between the safe door and the sensor.
- b. If using the power button mode, you will need to place the control box where you can easily touch the power button. Using the included hook and loop tape (14) to secure the control box is optional. Be aware the LED tape must plug directly into the control box so placement must be near the location you want to start applying the LED tape. If using the hook and loop tape make sure the area where you want to attach the light is clean and clear of debris and dust. Attach the adhesive-backed hook and loop tape to the back of the control box (13). Place the control box in desired location. Press firmly to ensure adhesive sticks. If the safe has carpet, use only the hook side of the hook and loop tape. The hook side will stick to the carpet.

### 2. LED TAPE

Plug the DC input end of the LED tape (8) into the control box (5). Start at the lower, inside, right corner of the door frame. If attaching the LED tape to a solid surface, pull the paper from the adhesive on the back of the LED tape. Stick the LED tape on the wall of the safe. If attaching the LED tape to carpet, use the 10 pieces of hook adhesive (10). Attach the hook adhesive to the back of the LED tape every 1 to 1.5 feet. The hook adhesive will stick to the carpet. Mounting brackets and screws (11)



are included to permanently attach the LED tape to the safe wall. The LED tape is 15 feet in length. If there is excess LED tape use scissors to cut the LED tape to length. Cut the LED tape at any of the cut lines (12). Be sure to place the tape into the back of the hinge cups to avoid crushing the lights. (see image)

## OPERATING INSTRUCTIONS

Use the power selector (2) to select the power button or motion sensor to turn the light on/off. If the power button is selected the light will only turn on/off when you press the power button (4). If the motion sensor is selected the light will only turn on when motion is detected. The light will remain on if motion continues and will automatically turn off after 60 seconds of no motion.

**NOTE:** The light may take up to 1 minute for the motion sensor to become fully functional after it is set.

## POWERING THE LIGHT

The light can be powered by the USB cord or by the rechargeable battery inside the control box.

### 1. POWER WITH USB CORD


If the control box is plugged in the power will draw from the USB cord, not the rechargeable battery.

### 2. RECHARGEABLE BATTERY OPERATION

Plug the USB into a power source, then plug the micro-USB into the control box (6). The battery charger indicator light (7) will illuminate red during charging. The indicator light will turn off when the unit is fully charged. If you are using the light while it is charging the indicator light will remain off. The rechargeable battery may take up to 6 hours to charge.

## LOCATION OF CONTROLS

- 1. Control box
- 2. Power selector: off, power button, motion sensor
- 3. Motion sensor
- 4. Power button
- 5. Light output
- 6. Micro-USB input
- 7. Battery charger indicator light
- 8. DC input
- 9. LED tape
- 10. Hook adhesive for LED tape
- 11. Mounting brackets and screws for LED tape
- 12. LED tape cut line
- 13. Hook & loop mount for control box

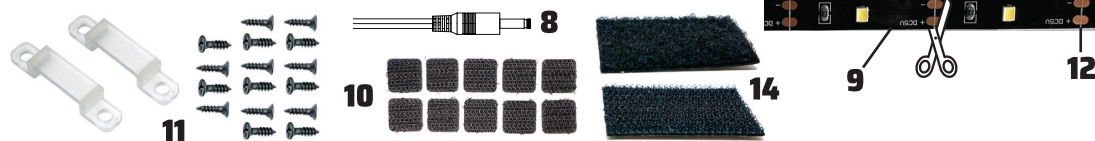

## PRODUCT INFORMATION CHART

Light Output (Lumens): . . . . .	600	Run Time Using Rechargeable Battery: . . . . .	Up to 3.5 hours
Correlated Color Temperature (CCT): . . . . .	5000K (Daylight White)	Run Time Using USB Cord: . . . . .	Unlimited
Length Of LED Tape: . . . . .	15 feet	Motion Sensor Detection Range: . . . . .	10 Feet
Number of LEDs: . . . . .	142	Motion Sensor Detection Angle: . . . . .	120°
Rechargeable Battery Charging Time: . . . . .	Up to 6 hours	Motion Sensor Auto Shut Off: . . . . .	60 Seconds

For online installation instructions and support visit: [LibertySafe.com/GlowFlex](http://LibertySafe.com/GlowFlex)