

## 2PK RECHARGEABLE SOLAR LED LIGHT BULB



### PRODUCT SPECIFICATIONS



Bulb (x2 PCS)



Remote Control (x1 PC)




Solar Panel (x2 PCS)



USB Cable (x1 PC)

### REMOTE CONTROL OPTIONS

Control distance 29.53ft - 39.37ft

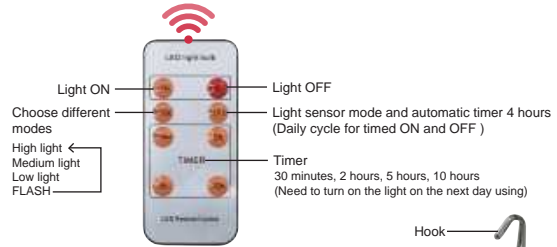

- Remark:
1. Includes CR2025 3V 150MAH battery.
  2. For the first use, press the mode button on the bulb to activate the remote sensing function.
  3. The device remembers the last brightness setting used before they were turned off.
  4. When the timer is set at 10hrs, the bulb will only work with low light mode to ensure the continuous lighting.



### PRODUCT SPECIFICATION

Model:	TSC-P26-2328S
Lumen:	High brightness of 350 Lumens Medium brightness of 150 Lumens Low brightness of 50 Lumens
Solar panel:	6V x 0.84W
USB charge time:	4 hours
Solar panel charge time:	6 - 9 hours
Lighting time: (Fully charged)	High light: 5hrs
	Medium light: 11hrs
	Low light: 20hrs
Material:	PC
Lamp size:	2.36 in. x 4.92 in.
IP grade:	Solar panel - IP65
	Bulb - IP44

Press mode button for 3 seconds and the bulb will go to standby mode. The bulb cannot be operated by remote control in standby mode.

Press mode button again to exit standby mode. (This function can be used when the bulb is not used for a long time.)

## CHARGING

Before using the bulb, check if the battery is sufficient. If the light is dim or does not light, please charge the bulb first.

When charging with a solar panel, connect the USB cable to the bulb and place the solar panel face up in a sunny place.

Step 1: Open the cover of USB port



Step 2: Insert the solar panel USB cable into the port



Step 3: Place the solar panel in a sunny place when charging, the red indicator light will on



• You can use the mobile phone adapter, computer USB interface to charge the bulb. If you use other DC equipment to charge the bulb, please confirm that the charging voltage is in the range of DC5V. If you exceed this voltage range, the bulb will be damaged.

Step 1: Open the cover of USB port



Step 2: Insert the USB cable into the port with 5V DC 1A adapter



Step 3: The red indicator light will illuminate



• The charging indicator light will be red while your bulb is charging and will turn green when it is fully charged.

## WARNING

- .Do not turn on the light when charging.
- .Do not leave the unit plugged in after it is fully charged. Charging the unit past the recommended maximum time will damage the battery.
- .The battery is not replaceable, do not attempt to change the battery.
- .Do not attempt to alter or change the LEDs.
- .Keep unit away from flammable materials while charging.

## SAFETY INFORMATION

1. WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
2. WARNING: Contains lead. May be harmful if eaten or chewed. Keep out of the reach of children.
3. WARNING: LED lights can cause eye damage. Do not shine directly into eyes.

## WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



## FCC STATEMENT (FCC ID: 2BLOJ-2405097)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

### Supplier's Declaration of Conformity 47 CFR §2.1077 Compliance Information

Unique Identifier: Model Number#: TSC-P26-2328S(2405097)

#### Responsible Party-U.S.Contact Information

TRACTOR SUPPLY COMPANY  
5401 VIRGINIA WAY BRENTWOOD, TN 37027  
For customer support  
Call:1-888-376-9601

#### FCC Compliance Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference received, including interference that may cause undesired operation.

Distributed by:  
TRACTOR SUPPLY COMPANY  
5401 VIRGINIA WAY  
BRENTWOOD, TN 37027  
CUSTOMER SUPPORT CALL: 1-888-376-9601  
[www.TractorSupply.com](http://www.TractorSupply.com)  
MADE IN VIETNAM