

# 60T Lawn Roller

If there are any missing parts please call 1-800-652-2321.

## OPERATION


This Lawn Roller weighs approximately 1,150 pounds when filled with water. The Lawn Roller must be drained at temperatures below 32°F (0°C) to prevent damage.

Always check capacity of towing vehicle to safely tow and stop roller.

Never use roller up and down slopes, always work across or diagonally.

## ASSEMBLY INSTRUCTIONS

1. Attach axle bars (5) to side angles (4) using 3/8" bolts (9) and 3/8" nuts (10).
2. Slide side bars over axle with the flanges of the bearing towards the inside of the roller head, add washers (7) and lock in place by inserting and spreading ends of cotter pins (8).
3. Attach hitch assembly (2) to side bars using 3/8" bolts (9) and 3/8" nuts (10).

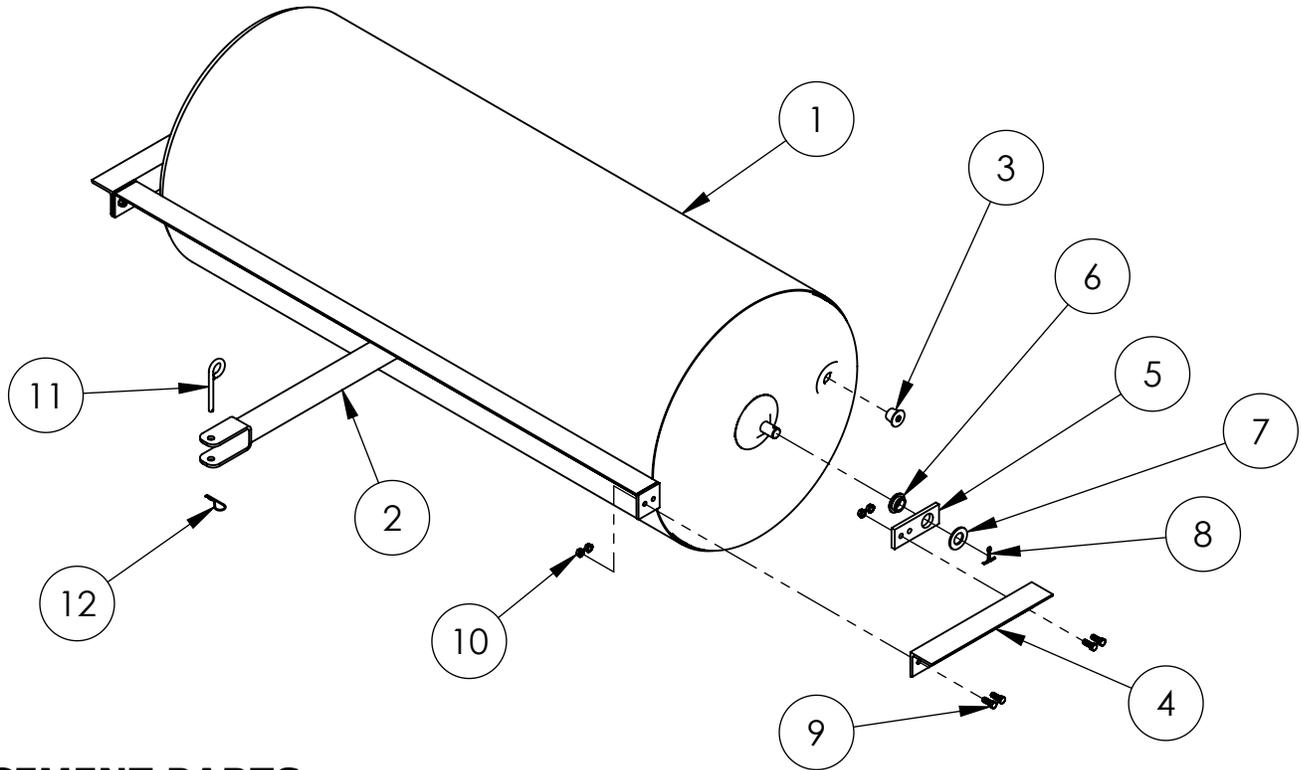

## REPLACEMENT PARTS

| ITEM NO. | PART NUMBER | DESCRIPTION                      | QTY. |
|----------|-------------|----------------------------------|------|
| 1        | 6000121     | DRUM, ROLLER                     | 1    |
| 2        | 6000123     | HITCH ASSEMBLY                   | 1    |
| 3        | 50401       | PLUG, FLUSH                      | 1    |
| 4        | 6000135     | ANGLE, SIDE                      | 2    |
| 5        | 6000136     | BAR, AXLE                        | 2    |
| 6        | 304281      | BUSHING                          | 2    |
| 7        | 300076      | WASHER, 1" SAE                   | 2    |
| 8        | 300087      | COTTER PIN, 3/16" X 1-1/2"       | 2    |
| 9        | 3000511     | 3/8-16 x 1" HEX BOLT             | 8    |
| 10       | 300063      | 3/8-16 KEPS NUT                  | 8    |
| 11       | 300083      | PIN, HITCH                       | 1    |
| 12       | 300084      | HAIRPIN COTTER, 0.093" X 2-5/16" | 1    |

When ordering replacement parts, Please include part numbers and description.  
6000164-REV A 1/09