

Step-By-Step Quick Start Guide To Using Your Generator

1 Remove Generator From Package

2 Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)
Oil Capacity: 7.5 fluid oz. Open side panel to add oil.
This generator includes Low Oil Shut Off and will not start with low oil. Start out with 10 oz, but make sure the **the oil does not go over the Lower Level line.** (FIGURE 1)

3 Add Fuel

Unleaded gasoline only octane rating of 87 or higher
Maximum Capacity: 0.55 Gallons (FIGURE 2)

4 Start The Generator

- Use the generator OUTDOORS in a WELL VENTILATED AREA.
- DO NOT CONNECT electrical devices until AFTER the generator is started.
- Turn Engine Switch to ON (FIGURE 3)
- Turn the fuel tank cap air vent knob clockwise to the "OPEN" position." Turn FUEL PETCOCK to ON (Figure 4)
- Adjust the CHOKE to CLOSED TO START position (Figure 5)
- Pump the Primer button until glass bowl is full (Figure 6).
- Start the generator with the Recoil (Pull) Start. (Figure 7)
- Once the engine has started, GRADUALLY move the choke lever to the "RUN/OPEN" position until the engine levels off. Then let the engine run approximately 5 minutes BEFORE adding appliances or tools.
You can now connect electrical devices.

1 Remove Cover To Add Oil



4 Fuel Petcock To ON



5 Closed To Start Position



6 Pump PRIMER Button



7 Recoil Start



Engine Switch

3



GEN1000i

1,000 Surge / 800 Running Watts

UNLEADED GASOLINE FUEL

GENERATOR SPECIFICATIONS:

- 1.3 HP Engine / 4 Stroke / 5,500 RPM
- Recoil Start
- 0.55 Gallon Fuel Tank
- 7.5 fluid oz. SAE10W-30 Oil
- Low Oil Shut Off
- UL Listed Electrical Outlet
- Engine Shut Off Switch
- Circuit Breaker & Power Outlets
- 1 - 12V D/C Outlet
- 1 - 120V A/C Outlet
- Complies with EPA / CARB emissions
- Run time = 6.3 hours @ 50% load
- Decibel Rating < 56 db @ 0% load
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited

OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.

Read and understand instruction manual before using generator.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

**Need Help? Do Not Return This Generator To The Store! Call Us First!
Monday-Friday 8:00-4:30 Central Time**

Visit our website for Troubleshooting & Frequently Asked Questions

SPORTSMAN


www.sportsmanseriesbrand.com/generators



GEN1000i

1,000 Surge / 800 Running Watts

UNLEADED GASOLINE FUEL

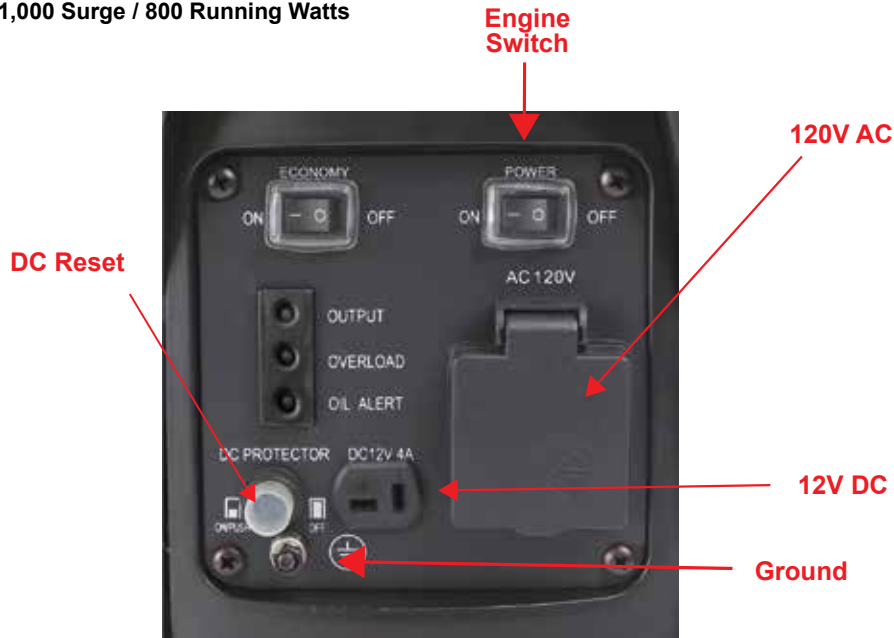

WARNING

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far away from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

NOTES

DO NOT CONNECT electrical devices until AFTER the generator is started.

WARNING: According to the State of California, the exhaust from this generator contains chemicals known to cause cancer, birth defects, or other reproductive harm.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

**Need Help? Do Not Return This Generator To The Store! Call Us First!
Monday-Friday 8:00-4:30 Central Time**

Visit our website for Troubleshooting & Frequently Asked Questions

SPORTSMAN

www.sportsmanseriesbrand.com/generators