



THE CLEAR CHOICE

THE ELITE ULTRA MANUAL

www.BlueTigerUSA.com

YOUR FIRST CALL
SHOULD BE TO US!

+1 800 935 1165

Become part of the Blue Tiger Family by
registering your product today!

Congratulations on your purchase
of a **Blue Tiger[®] Bluetooth headset!**

Our mission is to help
professional drivers be safe while
traveling on the road.



Important Safety Tip

Be Cautious of Excessive Volume Levels

Volume levels are measured in decibels (dB). Exposing your ears to any noise at or above 85 dB can cause gradual hearing loss.


According to the Occupational Safety and Health Administration (OSHA), listening to volume levels over 100 dB for more than two hours at a time can lead to hearing loss.

<http://www.osha.gov/SLTC/noisehearingconservation/#loud>

Table of Contents

Product Overview	4
Basic Operations	5
Pairing Instructions	7
Pairing with Multiple Devices (Multi-Point Pairing)	9
LED Indication	11
TTS English Prompt Tone	12
Battery Care & Charging Instructions	13
Specifications	15
Precautions / Questions and Answers	16
Additional Applications	18
Industry Leading Customer Support	19
One-Year Manufacturer's Warranty	19
FCC Compliance Statement	22
ISED Compliance Statement	23
RF Exposure Compliance Statement	24

Product Overview

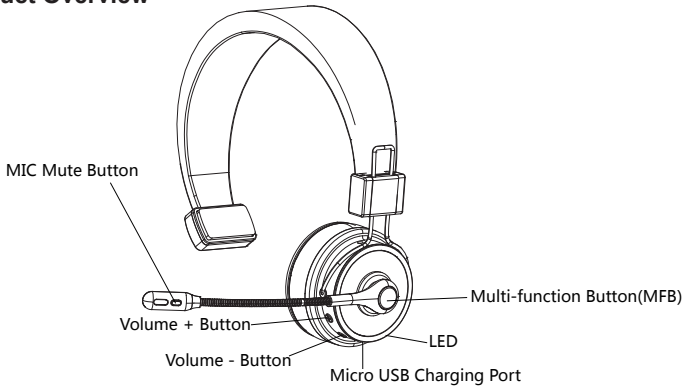

Basic Operations

Button	Function	Operation Instruction
Multi- function Button (MFB)	Power On	Press MFB for 4 seconds to turn on headset. You will hear a prompt tone 'Elite Ultra Activated', and then a prompt tone 'Ready to pair'. Once the headset is connected to your device successfully, you will hear a prompt tone 'Device Connected'.
	Power Off	Press MFB for 5 seconds to turn off headset. You will hear a prompt tone 'Elite Ultra off'.
	Redial Last Call	Double press MFB to dial the last call.
	Voice Dialing	For voice dialing, tap the MFB and wait for your audio device to respond. After your device responds, speak your command, "Call John Doe". (This function must be supported by your mobile phone.)
	Answer A Call	Short press MFB (for 0.5 seconds or less) to answer a phone call.
	Hang Up A Call	Short press MFB (for 0.5 seconds or less) to end a call.
	Reject a call	Press MFB for 1 second to ignore an incoming call
	Changing Language	Press MFB and Mute Button simultaneously for 1 second.

Volume +	Volume Up	Short press
	Next Song	Long press for 1 second
Volume -	Volume Down	Short press
	Previous Song	Long press for 1 second
Mute Button	Play / Pause	Long press for 1 second
	Mic Mute	Double press to mute mic , then double press again to unmute mic .

Pairing Instructions


- A. Ensure your Blue Tiger Elite Ultra headset is in the off position. Press & hold the silver MFB button located on the microphone boom for 4 seconds. You will hear “Elite Ultra activated”, then the unit will enter into pairing mode automatically and you will hear “ready to pair”. If the headset was already connected with another device, it will connect to that device automatically, and you will hear “device connected”.

- B. On your phone, access your Bluetooth menu, select “Add New” or “Search New Devices”. With your Blue Tiger headset in pairing mode, your phone should locate your headset. Check your phone's pairing procedures to pair the Elite Ultra to your phone.

- C. On your phone, select Elite Ultra from the list. A passkey or PIN code message may appear. If so, input “0000”, you should then hear “device connected”.

1


Pairing



Long press MFB 4 seconds. Pairing mode begins when Blue and Red LED lights flash alternately.

2

Connection




Access Bluetooth Settings on your phone to search for Elite ULTRA.

Pairing with Multiple Devices (Multi-Point Pairing)

To connect your Blue Tiger Elite Ultra headset to two Bluetooth devices simultaneously, follow the instructions below.

- A. Pair with the first device. (Follow “Pairing Instructions” for the first device.)
- B. On the first device: turn off Bluetooth or disconnect from Elite Ultra. You should hear “ready to pair” in the headset.
- C. On the second device, access the Bluetooth menu, and select Elite Ultra from the pairing list. Enter passkey or PIN code if necessary. You should hear “device connected”.
- D. On the first device turn on Bluetooth and/or reconnect your Elite Ultra headset from the list of devices. You should hear a second “device connected” alert.
- E. Your Elite Ultra headset is now paired with both devices.

If you need further assistance on pairing two devices, please give us a call at 800-935-1165.

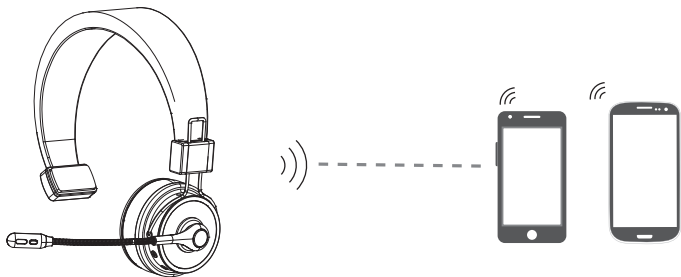

When connected with two mobile phones, the Elite Ultra plays music or makes calls from one device at a time, the device primarily chosen for calls or music. You may still easily alternate between the two devices in Bluetooth settings.

LED Indication

Mode	LED Indication
Power on	Blue LED flash twice.
Power off	Red LED flash twice.
Pairing mode	Red & Blue LED flashes alternately.
Connected Standby	Blue LED flashes once every 10 seconds.
Music Playing Mode	Blue LED flashes once every 10 seconds.
Talking Mode	Blue LED flashes once every 10 seconds.
Clear Pairing List	Blue and Red LED flashes once simultaneously.
Charging	Solid Red (Charging while power on, Red LED will override the Blue LED).
Full charged	Red LED turns off.
Low Voltage	Red LED flashes (Please charge the headset).

TTS English Prompt Tone



Status	English Prompt Tone
Power on	Elite Ultra Activated
Power off	Elite Ultra off
Pairing mode	Ready to pair
Connected	Device connected
Unconnected	Lost connection

Battery Care & Charging Instructions

Your Blue Tiger Elite Ultra headset uses a high-quality Lithium Polymer battery. Fully charged, it allows up to 60 hours talk time. Actual battery life between charging will vary based on your headset usage patterns.

Once your battery is low, the red-light indicator will blink intermittently.

When charging the headset, the LED indicator light will display a red light. It will blink blue intermittently if the headset is also turned on (Blue and Red LED will override if power is on while charging). When fully charged, the red indicator light will turn off.

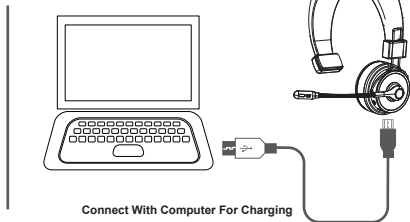

Note:

Please charge your Elite Ultra every 2 months at minimum (when used infrequently).

Specifications

Bluetooth Specification	Bluetooth V5.0
CODEC Code	SBC
Supported Profile	HSP, HFP, AVRCP, A2DP
Chipset Solution	QCC 3024
Operation Range	Up to 100 feet
Talk Time	Up to 60 hours
Standby Time	> 1200 hours in OFF state (or sleep mode) > 240 hours in connected standby mode
Charging Time	Approx. 2 hours
Battery Type	3.7V, 420mAh Lithium polymer battery
Overall Dimension	173.69 x 171.68 x 65.81 mm (= 6.8 x 6.8 x 2.6 inches)
Net Weight	About 115.5 g (= 0.25 lb)

Precautions / Questions and Answers

A. Passkey:

The passkey for pairing will be 0000, 8888, 1111 or 1234, depending on your mobile device.

B. Which charger should be used for charging?

Blue Tiger charger or power supply included in packaging, or replacement with DC 5v, 500mA.

C. How can I reset the headset?

Power on, and when in unconnected standby mode, press and hold MFB (do not release), then plug the headset to power supply to reset your headset. (Reset operation will not clear the headset's pairing list.)

D. How can I clear the pairing list on the headset?

With the headset in the ON state, press the MFB, Volume +, and Volume - buttons (all 3 buttons) simultaneously for 5 seconds. You will hear a double tone and the red and blue LED will illuminate for 1 second to acknowledge the pairing list is cleared. If the headset was connected, it will also enter the pairing mode.

Additional Applications

Feel free to connect your Blue Tiger Elite Ultra to any Bluetooth enabled PC, Mac, game system or other Bluetooth enabled device to enjoy online chat or audio.

Note:

Certain functions may not work when paired with a laptop or PC. Example, the MUTE function.

Industry Leading Customer Support

At Blue Tiger USA, we stand behind our products. We believe that our customer service does not end when we process your payment, but it continues for as long as you use our headset.

One-Year Manufacturer's Warranty

- (1) Blue Tiger USA warrants that your product will be free from defects in material and workmanship for one year from the date of purchase. If, during the first year from the date of purchase, your product fails to work due to a defect in material or workmanship, Blue Tiger USA will repair or replace the product, at its election, free of charge. Without proof of purchase, the warranty period begins on the date of manufacture. Consumable components (for example, cushions and battery) are not included in this one-year warranty.

- (2) The foregoing limited warranty does not cover equipment failure attributable to accident, improper operation, misuse, abuse, or any cause other than defects in the materials or workmanship of Blue Tiger USA products.
- (3) Blue Tiger USA obligations under this warranty are limited to repair or replacement (at our option) of any defective part returned to Blue Tiger USA at the customer's expense. Returned products require a Return Authorization that may be obtained by calling 800-935-1165 or visiting BlueTigerUSA.com. Products returned to Blue Tiger USA for repair under this warranty will be return shipped to the customer at Blue Tiger USA expense.

(4) THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

Some jurisdictions do not permit the exclusion of implied warranties and the foregoing exclusions may not apply to you.

(5) In no event shall Blue Tiger USA be responsible for any other damages whatsoever, including direct, indirect, special, incidental, consequential, or other damages for breach of this or any other warranty, expressed or implied.

Blue Tiger® is registered trademark by North American Blue Tiger Company, LLC registered in the United States and other Countries.

FCC Compliance Statement

NOTE: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following

measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the product.

ISED Compliance Statement

This device contains licence-exempt transmitter(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s).

Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause

undesired operation of the device.

L'émetteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

RF Exposure Compliance Statement

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet émetteur ne doit pas être situé ou fonctionner conjointement avec une autre antenne ou un autre émetteur.

BLUE  **TIGER**[®]

THE CLEAR CHOICE