




- **Powered By:** 80cc OHV high performance 4 cycle engine
- **High Output:** 2,300 starting watts - 1,800 running watts
- **Pure Power:** <3% THD of clean power output, sensitive electronics safe
- **Low Idle Technology:** Extended run time of 9 hrs. at 25% load
- **Parallel Equipped:** Complete with parallel ports for double the power output when linked together
- **Quiet Operation:** As low as 61 dB - ideal for home, camping, tailgating & RV
- **LED Equipped:** Built in LED  control panel light
- **Complete Mobility:** Factory installed telescoping handle & wheels
- **Digital Data Center:** Provides voltage, frequency, hours, power & fuel levels, output/overload/oil level status along with fuel saving low idle and reset functions
- **ULTRA Lightweight:** Completely new design for superior weight reduction
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels



GXS2300i

0.9-Gal Tank with
Up To 9.0 Hour Runtime (Gas)



Integrated
Handle



Quiet Tone
Muffler




Recoil
Start



Integrated
Outlet Covers



Total Harmonic
Distortion < 3% THD



Telescopic
Handle



80cc, OHV,
4 Cycle Engine



3" Flat
Free Wheel



iPOWER 2300 1800
STARTING WATTS WATTS VE ARRANQUE / WATTS DE ARRANQUE
RUNNING WATTS WATTS DE FUNCIONAMIENTO / WATTS CONTINUOS

CO SENSOR
POWER: 8.8 kWh
888.8
9A 20A
120V AC 20A 5-20R
120V AC 30A LS-30R

SE 10W-30
CAPACITY: 0.35L, 0.37Ql, 11.8Qz
AIR CLEANER MAINTENANCE / MANTENIMIENTO DEL LIMPIADOR DE AIRE / FILTRO DE MOTOR
Clean interval every 100 hours or 10 hours on each revolution. / Limpiar el elemento cada 100 horas o 10 horas en cada revolución.
Your unit has been designed without engine oil Add oil prior to starting or damage will occur. Engine will not start or will stall if it runs out of oil. / Su unidad ha sido diseñada sin aceite de motor. Agregue aceite antes de arrancar o se producirá daño. El motor no arrancará o se detendrá si se agota el aceite. / Le unité a été conçue sans huile moteur. Ajoutez de l'huile avant de commencer ou des dommages se produiront. Le moteur ne démarre pas si il n'est ni un faible ou d'huile est épuisée.

GXS2300i

Data Center Displays;
Voltage, Frequency, Hours,
Power, Fuel Bar,
Output Ready/Overload/Low Oil indicators
Low Idle and Reset Buttons


CO Sensor:
Auto Shutdown




Parallel
Capability



AC Outlet: (2)
5-20R, 20A, 120V



L5-30R: (1)
30A, 120VAC

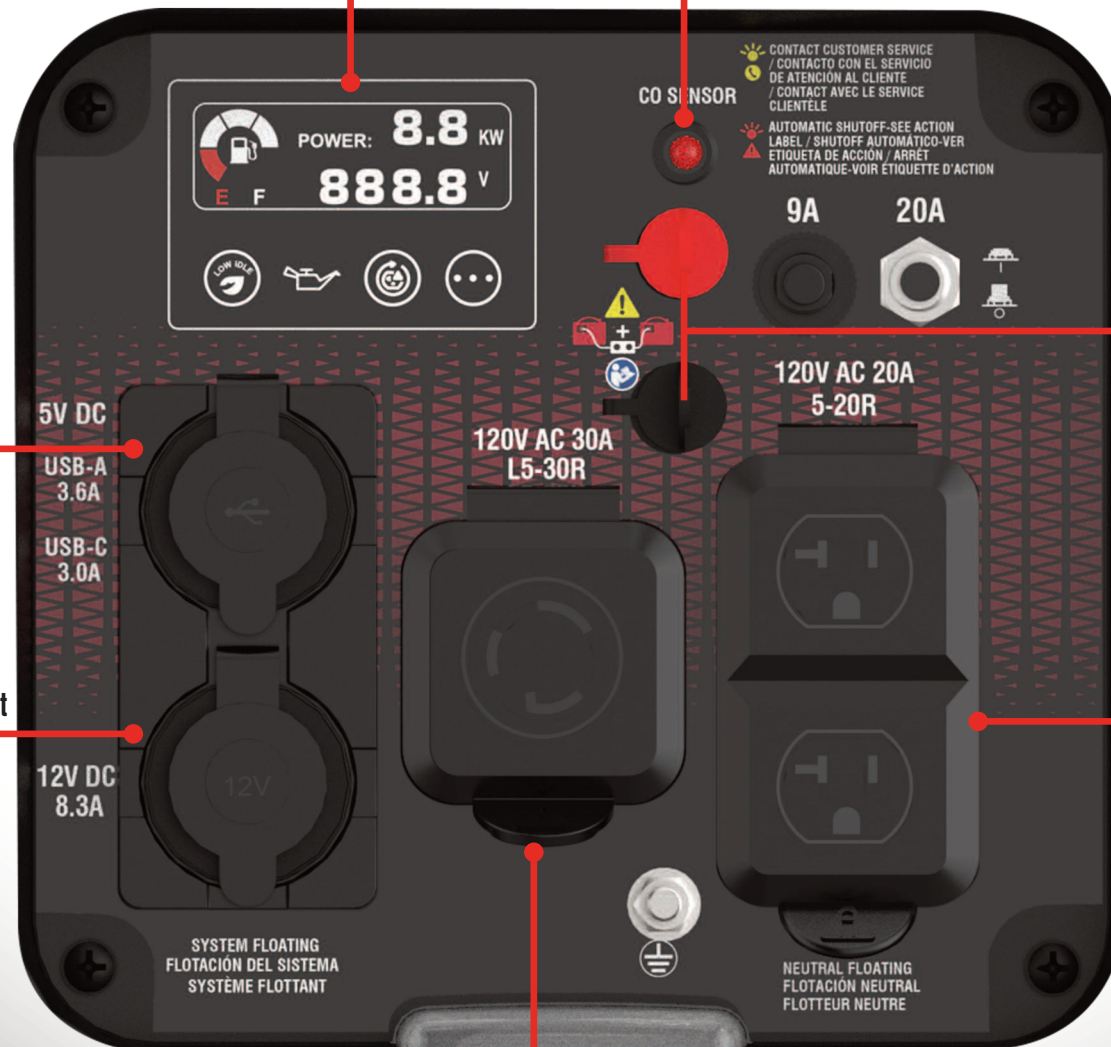

DC Outlet:
(2) 5VDC USB



DC Outlet:
8.3A, 12VDC Automotive Outlet



5V DC

USB-A
3.6A

USB-C
3.0A

12V DC
8.3A

SYSTEM FLOATING
FLOTACIÓN DEL SISTEMA
SYSTÈME FLOTTANT

120V AC 30A
L5-30R

120V AC 20A
5-20R

9A 20A

CO SENSOR

CONTACT CUSTOMER SERVICE
/ CONTACTO CON EL SERVICIO
DE ATENCIÓN AL CLIENTE
/ CONTACT AVEC LE SERVICE
CLIENTÈLE
AUTOMATIC SHUTOFF-SEE ACTION
LABEL / SHUTOFF AUTOMÁTICO-VER
ETIQUETA DE ACCIÓN / ARRÊT
AUTOMATIQUE-VOIR ÉTIQUETTE D'ACTION

9A

20A

120V AC 20A
5-20R

NEUTRAL FLOATING
FLOTACIÓN NEUTRAL
FLOTTEUR NEUTRE

GXS2300i

| GXS2300i - Lightweight Inverter | |
|----------------------------------|--|
| Starting/Running Watts (Gas) | 2300 / 1800 |
| Starting/Running Watts (Propane) | NA |
| Certifications | EPA - CARB - CSA - PGMA Compliant |
| CO Monitor | Yes |
| AC Voltage | 120V |
| Rated Speed/Frequency | Variable/60Hz |
| Total Harmonic Distortion (THD) | <3% |
| Grounding System | Neutral Floating |
| Noise Level (dB) | As Low As 61 |
| Engine Type | Single Cylinder 80cc - 4 Stroke OHV |
| Starting System | Recoil Start |
| Low Oil Shutdown | Yes |
| Fuel Type | Gasoline |
| Oil Type and Capacity | 10W-30 / 350ml |
| Low Idle | Yes |
| Alternator Type | Permanent Magnet -Inverter |
| Tank (Gas) | 0.9 Gal |
| Runtime @25% Load (Gas) | 9.0 Hour |
| Handle | Integrated Top Handle |
| Wheel | 3" Never Flat |
| AC Outlets | 1x5-20R (20A, 120V) - 1xL5-30R (30A, 120V) |
| DC Outlets | 1x8.3A (12VDC) Automotive Outlet DC Outlets 2xUSB (5V): USB-A 3.6A + USB-C 3.0A |
| Parallel Capability | Yes - Cables Included |
| Data Center | Voltage, frequency, hours, output/overload/oil level status, power & fuel levels, fuel saving low idle & reset functions |
| Included | Oil - Funnel - 12VDC Battery Charging Cable - Tool Kit - 30A RV Adaptor - Parallel Cable - Manual - Quick Start Guide |
| Warranty (Residential) | 3 Year |
| Unit LxWxH | 19.9 x 10.7 x 18.5 inch / 50.5 x 27.1 x 46.9 cm |
| Carton LxWxH | 20.7 x 12.0 x 20.7 inch / 52.5 x 30.5 x 52.5 cm |
| Unit Weight | 39.2 lbs / 17.7 kg |
| Shipping Weight | 46.3 lbs / 21.0 kg |
| UPC | 850016881588 |



Integrated LED Light



FULL PARALLEL INTEGRATION*

**DOUBLES YOUR POWER
ONCE CONNECTED**

Read manual for full instructions.

NOTE: Maximum output is obtained from the L5-30R receptacle

** Requires second GXS2300i/D Series inverter - sold separately.*



i POWER

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

