

# LOG DOLLY OWNER'S MANUAL







# WARNING:

Read carefully and understand all **ASSEMBLY AND OPERATION INSTRUCTIONS** before operating. Failure to follow the safety rules and other basic safety precautions may result in serious personal injury.

**MODEL# TMW-16** 

Thank y below:	ou very much for choosing a Yard T	uff product. For future reference, please complete the owner's record
	Model: TMW-16	Purchase Date:
	Save the receipt, warranty and thes	se instructions. It is important that you read the entire manual to

This product is designed for certain applications only. The manufacturer or distributor cannot be responsible for issues arising from modification. We strongly recommend this product not be modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use the product until you have first contacted the distributor to determine if it can or should be performed on the product.

For technical questions please call 218-943-6290

become familiar with this product before you begin using it.

#### TECHNICAL SPECIFICATIONS

Weight Capacity	1000 lbs	
Log capacity	18" Diameter	
Wheel Size	16" 6.50-8 Pneumatic	
Extension handle	31-1/2"	
Dimensions L x W x H	102" × 36" × 33"	

#### **GENERAL SAFETY RULES**

**WARNING:** Read and understand all instructions. Failure to follow all instructions listed below may result in serious injury.

CAUTION: Do not allow persons to operate or assemble this log dolly until they have read this manual and have developed a thorough understanding of how the log dolly works.

WARNING: The warnings, cautions, and instructions discussed in this instruction manual cannot cover all possible conditions or situations that could occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

#### SAVE THESE INSTRUCTIONS

#### **WORK AREA**

- Keep work area clean, free of clutter and well lit. Cluttered and dark work areas can cause accidents.
- **Keep children and bystanders** away while assembling or operating the log dolly. Distractions can cause you to lose control, so visitors should remain at a safe distance from the work area.
- Be aware of all power lines, electrical circuits, water pipes and other mechanical hazards in your work area, particularly those hazards below the work surface hidden from the operator's view that may be unintentionally contacted and may cause personal harm or property damage.
- Be alert of your surroundings. Using the log dolly in confined work areas may put you in a dangerous situation.

#### PERSONAL SAFETY

- Stay alert, watch what you are doing and use common sense when using the log dolly. Do not use the log dolly while you are tired or under the influence of drugs, alcohol or medication. A moment of inattention while operating the log dolly may result in serious personal injury.
- **Dress properly.** Do not wear loose clothing, dangling objects, or jewelry. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry or long hair can be caught in moving parts.

#### LOG DOLLY USE AND CARE

- **Do not modify the log dolly in any way.** Unauthorized modification may impair the function and/or safety and could affect the life of the equipment.
- Always check for damaged or worn out parts before using the log dolly. Broken parts will
  affect the log dolly operation. Replace or repair damaged or worn parts immediately.



- 1. **BE AWARE of side hills or steep inclines.** Operate on flat surfaces as small inclines or hills can cause log dolly to tip over or roll out of control.
- 2. NEVER use this log dolly at speed higher than 5MPH. This log dolly is designed to operate at low speeds at all times.
- 3. DO NOT transport people or pets with the log dolly.


# **ASSEMBLY**

Step 1		Step 2	
	Assemble the support bracket (3#) onto the bow bracket (1#) with 15# (M10*30)		Assemble the two axles (9#) into the bow bracket (1#) with (11#) M6*50
Step 3	201.01.101.00	Step 4	+
	Assemble the main upper tube (2#) onto the bow bracket (1#) with M10*50 (12#) and support bracket(3#) using M8*45 (14#).		Connect the (4#) handle into the (2#) main upper tube with M10*50 (12#)
Step 5		Step 6	+
	Install hitch (6#) onto the extension handle (5#) with M10*45 (13#)		Connect the extension handle (5#) into the handle(4#) with M10*40 (14#)
Step 7		Step 8	
	Assemble the two wheels (7#) onto the Axle (9#) with ( 20# 21#) washer and nut		Assemble the log hook cover(22#) onto the (2#) main upper tube with M6*60 (10#)
Step 9			
	Assemble the log tong (8#) into the log arch		


## **MAINTENANCE**

- Maintain your log dolly. It is recommended that the general condition of the log dolly be examined before it is used. Keep the log dolly in good repair by adopting a program of conscientious repair and maintenance in accordance with the recommended procedures found in this manual.
- **Keep the log dolly clean.** A properly maintained log dolly will work more effectively. Keep all of parts dry, clean, and free from oil and grease.
- Cleaning. Use only soap and a damp cloth to clean your log dolly.

## **DIAGRAM:**

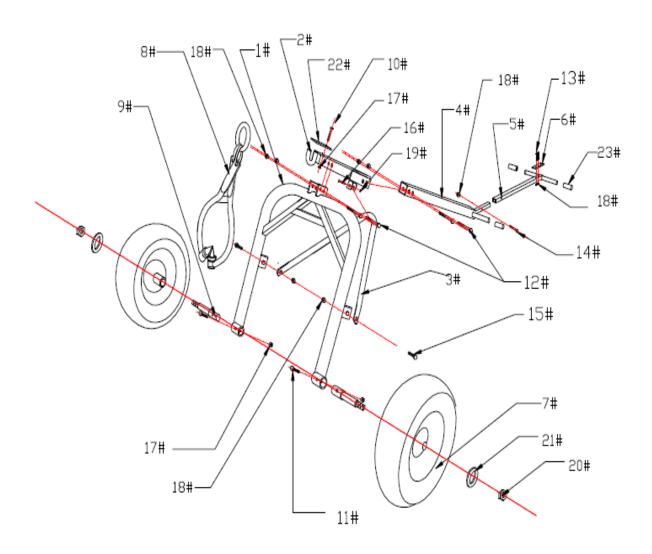

#### **PARTS LIST:**

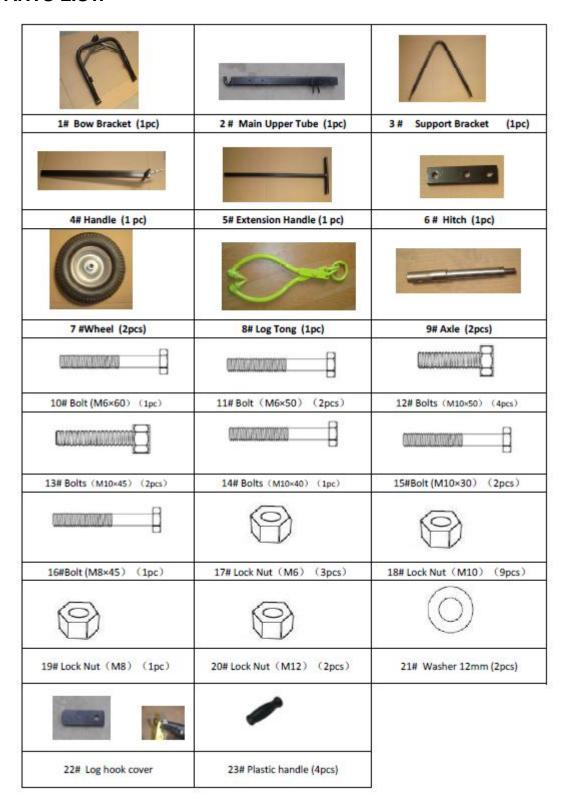

### **WARRANTY**

# One-year limited parts warranty



BAC Industries PO BOX 155 Miltona, MN 56354

Made in CHINA