PIRATE BRAND® SODA STORMS 3-IN-I ALL-MEDIA* ABRASIVE BLASTERS

Proudly Distributed By:

PRODUCT LINE BROCHURE

AST POTS

SOFT ABRASIVES HARD ABRASIVES WET/DRY BLAST

ABRASIVE

RATE BR

WHAT CAN SODA STORM" DO FOR YOU?

Commercial Restoration Cleaning Applications



Fire Restoration Cleaning Applications



Mold Remediation Cleaning Applications



Marine Coating Removal





SODA STORM^M 3-in-1 abrasive blast pots are true **all-media* systems** and come equipped to not only blast with **soft abrasives (#1)** like soda, but with traditional more aggressive abrasives (#2) as well. Using our WIN[®] (Water Induction nozzle), gain the advantage of wet blast dust suppression (#3).

The most common Soda Storm[™] cleaning applications include: • Fire Restoration Graffiti Removal • Food Industry Mold Remediation

- Engine Rebuiding

Also used for coating removal on:

- Automobile Restoration
- Marine Equipment
- Commercial Vehicles

* Never use abrasives containing silica as they are a respiratory health hazard.

Food Industry Cleaning Applications



Engine Rebuilding Cleaning Applications



Automotive Coating Removal



Aviation Equipment Industrial Equipment

SOFT ABRASIVES HARD ABRASIVES WET/DRY BLAST

NTE BRA



SODA STORM" 3-IN-1 ALL-MEDIA* SYSTEMS

SODA STORM™ SYSTEMS INCLUDE:

- PIRATE BRAND® APVII[™] Premium Multi-Port Fixed Orifice Sleeve for dialling in the perfect abrasive flow rate - includes clean-out ball valve assembly & standard Tungsten Carbide Sleeve for heavier abrasive use
- Water Induction Nozzle System (WIN®) for dust suppression & dual operation as a dry or wet blast nozzle. Features a double-venturi design for a 35% larger blast pattern and "hot-spot" elimination
- Moisture separator with 50 micron filter element
- Galvanized piping for corrosion resistance
- Heavy duty full port ball valves
- Quick metering valve removal coupling provides fast access to obstructions bridging over the metering port
- Abrasive flow assist vibrator with controls
- Pressure regulator with liquid filled gauge
- Differential pressure gate valve provides you with precision control of your abrasive flow rate
- Blow-down muffler reduces noise
- 50 ft. Ergo Flex blast hose is ergonomically friendly & helps eliminate operator fatigue
- 150 psi** (10.3 bar) Pressure Vessel A.S.M.E. Section
 VIII Division 1 & CRN for all provinces
- Lid and screen to keep pot free of contaminants
- Valve guard to protect valves & gauges when transporting on 3.5 cu. ft. & 6.5 cu. ft. SODA STORM™ blasters

* Never use abrasives containing silica as they are a respiratory health hazard. ** Do not exceed 125 PSI when using nylon blast hose couplings & nozzle holders. FEATURING THE SODA STORM

> **3-IN-I** SOFT ABRASIVES HARD ABRASIVES WET/DRY BLAST



Includes multi-port fixed orifice sleeve for use with soft abrasives and a standard sleeve for traditional abrasives.

3.5 CU. FT. SODA STORM[™] Shown above with 55'Twinline Hose Assy control Handle #2, WIN[®] System & 50 ft. Ergo Flex Blast Hose



WATER INDUCTION NOZZLE

Our WIN® (water induction nozzle) System with simple hook up garden hose thread attachment is one of the best in the business. You gain the ability to blast dry or blast wet to suppress dust. The double venture design has the added benefit of a 35% larger blast pattern and eliminates the "hotspot" in the center of traditional nozzle blast patterns



APVIITM PREMIUM METERING VALVE

The APVII[™] is our top-of-the-line metering valve & delivers the best possible performance combined with a low maintenance cost. Includes many premium features including a clean out port and multi-ported sleeve (shown next to valve).



QUICK REMOVAL COUPLING

The premium coupling that we use to attach the metering valve to the bottom of the pressure vessel was chosen for one simple purpose... quick & easy removal of the metering valve when necessary for obstruction removal or servicing. You'll thank us for this one.

5

AVAILABLE SYSTEMS



PN: 999-8040-010PB

1.5 Cu. Ft. (43 Liter) capacity, 150 PSI* (10.3 BAR) pressure hold system with pneumatic controls. Includes:

- APV II[™] Metering Valve with Ported & Standard Sleeve.
- Automatic Air Valve
- 1" Piping w/Moisture Separator
- Lid & Screen
- #2 Pneumatic Control Handle w/55'Twinline Control Hose
- 50' Ergo-Flex Blast Hose w/Couplings
- #5 Tungsten Carbide Water Induction Nozzle

PN: 999-8040-110PB

Same as 999-8040-010PB without the blast hose and nozzle.



PN: 999-8040-030PB

3.5 Cu. Ft. (100 Liter) capacity, 150 PSI* (10.3 BAR) pressure hold system with pneumatic controls. Includes:

- APV II[™] Metering Valve with Ported & Standard Sleeve.
- Automatic Air Valve
- 1" Piping w/Moisture Separator
- Lid & Screen
- #2 Pneumatic Control Handle w/55'Twinline Control Hose
- 50' Ergo-Flex Blast Hose w/Couplings
- #5 Tungsten Carbide Water Induction Nozzle

PN: 999-8040-130PB

Same as 999-8040-030PB without the blast hose and nozzle.



6

PN: 999-8040-060PB

6.5 Cu. Ft. (185 Liter) capacity, 150 PSI* (10.3 BAR) pressure hold system with pneumatic controls. Includes:

- APV II[™] Metering Valve with Ported & Standard Sleeve.
- Automatic Air Valve
- 1-1/4" Piping w/Moisture Separator
- Lid & Screen
- #2 Pneumatic Control Handle w/55'Twinline Control Hose
- 50' Ergo-Flex Blast Hose w/Couplings
- #5 Tungsten Carbide Water Induction Nozzle

PN: 999-8040-160PB

Same as 999-8040-060PB without the blast hose and nozzle.

Blast cabinet models with foot pedal controls also available.

* Do not exceed 125 PSI when using nylon blast hose couplings & nozzle holders.

ADDING ABRASIVE

Abrasive is added through the hole in the top of the Abrasive Blaster where the Pop-up and its seat are located. When abrasive is added, it flows down through the hole, around the Pop-up and, down to the bottom of the pressure vessel where it will exit through the Metering Valve when blasting is started.

PRESSURIZATION


Before pressurization can take place in a Soda Storm[™] system, the Blow-down Valve must be closed. Then, when a compressed air source (such as an air-compressor) is connected to the inlet of the Abrasive Blaster and the Inlet Valve is opened, compressed air can flow through the Moisture Separator and Pressure Regulator into the pressure vessel causing the Pop-up (located internally) to seal against its seat allowing the pressure vessel to become pressurized. To blast at pressures less than the minimum required inlet pressure of 90PSI, the Pressure Regulator is used. When the control handle is activated, the Auto Air Valve and Metering Valve open allowing compressed air & abrasive to flow and mix. The mixture of compressed air and abrasive will now exit Loaded Abrasive the Abrasive Blaster through a blast hose and nozzle connected to the coupling on the Metering Valve and blasting begins.

DIFFERENTIAL PRESSURE


When blasting using the Multi-Port Fixed Orifice Sleeve in the Metering Valve, differential pressure may be used to aid in the flow of abrasive. Differential pressure uses **slightly** higher pressure in the Pressure Vessel than in the Pusher Line to help "push" the abrasive through the small orifices in the Multi-Port Fixed Orifice Sleeve, Differential pressure is achieved by partially closing the Differential Pressure Gate Valve until the Differential Pressure Gauge is reading a **slightly** lower PSI than the Vessel Pressure Gauge. In addition to using differential pressure, the Vibrator may be used to aid in the flow of abrasive.

DEPRESSURIZATION (BLOW-DOWN)

When the control handle is released in a pressure hold (SPH) system, the pressure vessel remains filled with compressed air. The compressed air remaining in the pressure vessel is released when the inlet valve is manually closed and the blow-down valve is manually opened.





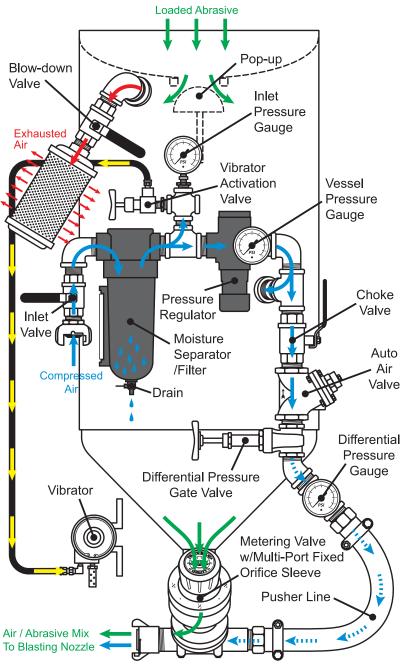

THE PERFECT STOR

SODA STORM™ BLASTER

The Soda Storm[™] is the most advanced small blaster available from Pirate Brand[®]. It boasts all top-quality components and an arsenal of productivity boosting features. It is designed to blast with all types of media* including soda and other soft abrasives. The Perfect Storm[™] comes standard with a 3.5 cu ft Soda Storm[™] Blaster but is available with the larger 6.5 cu ft version. Advantages include:

- APVII[™] Premium Metering Valve with multi-port and standard sleeves included for achieving the perfect flow rate.
- Moisture separator with 50 micron filter element
- Galvanized piping for corrosion resistance
- Heavy duty full port ball valves
- Quick removal coupling provides fast removal of metering valve for maintenance
- Abrasive flow assist vibrator with controls
- Pressure regulator with liquid filled gauge
- Differential pressure gate valve provides precision control over your abrasive flow r rate
- Blow-down muffler reduces noise
- 150 psi^{**} (10.3 bar) pressure vessel A.S.M.E. Section VIII Division 1 & CRN for all provinces
- Weather proof manual & manual case to keep manual close and protected
- Lid and screen to keep pressure vessel free of debris and contaminants.
- Valve guard to protect valves and gauges
- * Never use abrasives containing silica as they are a respiratory health hazard.
- ** Do not exceed 125 PSI when using nylon blast hose couplings & nozzle holders.

INCLUDED ACCESSORIES

The Perfect Storm[™] comes with an assortment of accessories to get you up and running quickly. Just add media and fuel and you're in business. Accessories included are:

- 50' of ergoflex blast hose w/twinline, pneumatic #2 control handle and WIN® water induction nozzle
- Nova2000[™] Respirator WITH COOL TUBE to keep your operator blasting comfortably
- 50' of breathing airline hose

• Spare pack of inner lenses, outer lenses, and tear-aways for the Nova2000 Respirator

Blast suit

(8)



The high efficiency Air Dryer included on the Perfect Storm[™] keeps the air flowing to the blaster and the breathing filter cool and dry. The result is a more reliable and longer lasting system that does not clog due to wet abrasive or wear out prematurely due to moist air running through the piping, valves & control system. Features include:

• Epoxy internal coating for long life • Low pressure drop

• Sight windows to view desiccant level • Aux. connection

SODA STORM



Filter located on the air dryer frame

AIRLINE FILTER

The included Radex[™]

A COMPLETE MOBILE BLASTING SYSTEM

COMPRESSOR

To power the Perfect Storm[™] we chose a compressor that is up to the demands of abrasive blasting. The Sullivan Palatek D185U2CA4T rotary screw compressor has been positioned on the trailer to allow easy access to the controls and fuel tank as well as all maintenance areas. Features include:

- 185 cfm (5.2 m³/min) rated delivery
- 100 psig (700kPa) rated operating pressure
- CAT C2.2T Tier 4 Final Compliant engine
- Automatic shutdown protection system
- Exterior drains for fuel, engine oil, coolant & compressor oil
- 21 gal (79.5 L) fuel tank capacity
- 49 horsepower (36.5kw) @ rated horsepower
- Fuel consumption 2.9 gal/hour (11 L/hour)
- Containment frame with drain ports on all 4 corners
- Noise level max of 76 dBA at 7 meters
- 3 year unlimited hour air end Sullivan-Palatek warranty.

WEIGHTS & DIMENSIONS

- 109" Overall Height • 6' tongue length
- 821/2" Overall Width
 - 14,000 lbs GVW Trailer
- Approximately 8,800 lbs full fuelled (does not include weight of abrasive)

Here it is, a complete blasting solution in one portable package. The Perfect Storm[™] has been developed in cooperation with the blasters who actually do the work so you can be sure it has the features, tough components & conveniences that help get the job done fast and right. At the heart of the system is the Soda Storm[™] blast system which can blast with standard abrasives and soda for special cleaning & coating removal applications.

Ease of deployment is the key feature of the Perfect Storm[™]. You can spend well over an hour to load all the individual components, and another hour unloading them again and setting them up with a standard setup. The Perfect Storm[™]. can be deployed and be ready to start blasting in about 5-10 minutes. Quick deployment not only makes this a great piece of equipment to own but is also a great option for rental houses to keep in their fleet.

Start a Business or Add A Profit Center To Your Existing Business

One way to turn the Perfect Storm[™] into a profit center is to finance at a low monthly cost that is easy to recoup. We can help with up to 60 month financing options.

TOOLBOX

The included toolbox with stainless steel padlocks is the perfect place to store your blasting accessories and hoses. At Pirate Brand[®], we know abrasive blasting and have used our knowledge and experience to bring you products that not only perform exceptionally well, but also include features that make the job easier and more convenient.

TRAILER

For the platform of the Perfect Storm[™] we chose this heavy duty 14,000 lbs GVW trailer. Trailer features include:

- Heavy Duty 12,000 lb BULLDOG[®] Jack
- Space to accommodate pallet of media (media not included)
- Included spare tire
- Steps for easy access to equipment
- Fully adjustable ball or pintle ring
- Fully galvanized under deck piping linking compressor, air dryer & blaster

• 700 lbs tongue weight • 16' length usable bed

BLASTING SETUP

BLASTING SETUP









BLAST]	Hose / Twinline
10-100BLK-050-3AL	Nozzles Not Included 1" BLAST HOSE ASSEMBLY, 50', BLACK, INCLUDES ALUMINUM NOZZLE HOLDER
10-100TAN-050-3NY	1" BLAST HOSE ASSEMBLY, 50', ERGOFLEX, INCLUDES NYLON NOZZLE HOLDER (125 PSI MAX)
10-100TAN-050-3XNY	1" BLAST HOSE ASSEMBLY, 50', ERGOFLEX, INCLUDES 50mm NYLON NOZZLE HOLDER (125 PSI MAX)
10-114BLK-050-6	50' 1-1/4" BLAST HOSE/TWINLINE EXTENISON W/NYLON COUPLINGS
10-114BLK-050-4AL	1-1/4" EXTENSION BLAST HOSE ASSY, 50'
10-100BLK-050-4AL	1" EXTENSION BLAST HOSE ASSY, 50'
888-4100-50101PB	55' TWINLINE EXTENSION, W/QC
10-100BLK-050-4AL	1" EXTENSION HOSE ASSEMBLY, 50'
10-114BLK-050-4AL	1-1/4" EXTENSION HOSE ASSEMBLY, 50'
27WT-1	SAFETY CABLE, 1/2" - 1" HOSE TO EQUIP.
27WC-1	SAFETY CABLE, 1/2" - 1" HOSE TO HOSE.
27WC-15 27WT-2	SAFETY CABLE, 1-1/4" HOSE TO HOSE. SAFETY CABLE, 1-1/4" HOSE TO EQUIP.



AIR HOSE						
10-034RED-050-1	3/4" AIR HOSE ASSEMBLY, 50'					
10-100RED-025-1	1" AIR HOSE ASSEMBLY, 25'					
10-100RED-050-1	1" AIR HOSE ASSEMBLY, 50'					
10-112RED-025-1	1-1/2" AIR HOSE ASSEMBLY, 25'					
10-112RED-050-1	1-1/2" AIR HOSE ASSEMBLY, 50'					
	•					
27WT-1	SAFETY CABLE, 1/2" - 1" HOSE TO EQUIP.					
27WC-1	SAFETY CABLE, 1/2" - 1" HOSE TO HOSE.					
27WT-2	SAFETY CABLE, 1-1/2" - 3" HOSE TO EQUIP.					
27WC-2	SAFETY CABLE, 1-1/2" - 3" HOSE TO HOSE.					



D -Q					
NV3-702-50-PFC	NOVA 3® RESPIRATOR PACKAGE				
407000-PFC	NOVA 2000™ RESPIRATOR PACKAGE				
407800-PFC	ASTRO™ RESPIRATOR PACKAGE				
03-501	C40 HOT & COOL TUBE				
407001	COOL TUBE				
407024	HOT TUBE				
	*				
08-401-01	RPB® GX4 GAS MONITOR WITH 12V DC BATTERY CLIPS, INCLUDES 10 PPM CO CARTRIDGE				
08-436	AUX STROBE LIGHT AND ALARM WITH 50FT CABLE, RPB® GX4 GAS MONITOR				
	AGES INCLUDE RESPIRATOR HELMET, 50' PPLY HOSE, AND RADEX™ AIRLINE				

-	•••	

(10)







PIRATE BRAND®



About Pirate Brand®

At Pirate Brand®, we know abrasive blasting. We have fused our 100+ years of combined experience in the blasting industry with feedback from distributors and end-users to produce abrasive blast equipment and replacement parts that are second to none. In addition to our extensive line of blasting equipment, we produce a full line of aftermarket parts that are 100% compatible replacements for other blast equipment manufacturers. We believe in quality, reliability and productivity so we subject all our products to strict quality control testing to ensure the best possible performance is achieved.

In the tough world of abrasive blasting, quality is crucial, ...and Pirate Brand® delivers.

OTHER AVAILABLE PRODUCTS

S-SERIES BLASTERS



CONVERSION KITS





AIR DRYERS &

MOISTURE SEPARATORS

DRY LAND

BULK BLASTERS



COLUMN S & DO

APVILBGO

93 4

