

TENAX®

SOLUTIONS ALL AROUND YOU

SENTRY SECURA SAFETY FENCE

MALLA DE SEGURIDAD SECURA SENTRY / CLÔTURE DE SÉCURITÉ SECURA SENTRY



RECOMMENDED USES

Safety fence for use on construction sites, parking lots and warehouses.

Spanish: Malla de seguridad para uso en obras de construcción, estacionamientos y bodegas.

French: Barrière de sécurité pour une utilisation sur des chantiers de construction, des parkings et des entrepôts.

Safety fence for use around hazard, traffic or pedestrian areas.

Spanish: Malla de seguridad para usar alrededor de zonas de peligro, tráfico o peatones.

French: Barrière de sécurité pour une utilisation dans des zones dangereuses, de trafic intense ou des zones piétonnes.

Crowd control-sporting events, parades, fairs and carnivals.

Spanish: Malla para control de multitudes en escenarios deportivos, desfiles, ferias y carnavales.

French: Contrôle de la foule lors d'événements sportifs, de défilés, de foires et de carnivals.

Property delineation.

Spanish: Delimitación de la propiedad.

French: Délimitation de la propriété.



4-FT x 50-FT

1.21-M x 15.24-M

MESH SIZE 1.46-IN x 1.46-IN

Spanish: tamaño de malla 3.7-CM x 3.7-CM / **French:** maillage 3.7-CM x 3.7-CM

FINISHED EDGE ORANGE / NARANJA BORDE ACABADO / BORD FINI ORANGE

Scan the code for instructions.



Spanish: Lea el código para obtener instrucciones.

French: Scannez le code pour les instructions.



YOU MAY NEED

posts
mallet
fence ties
wood slat

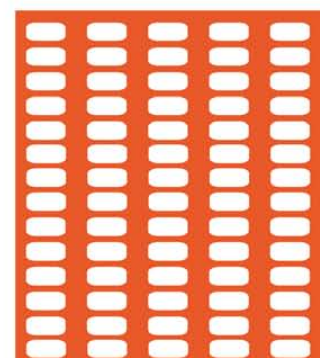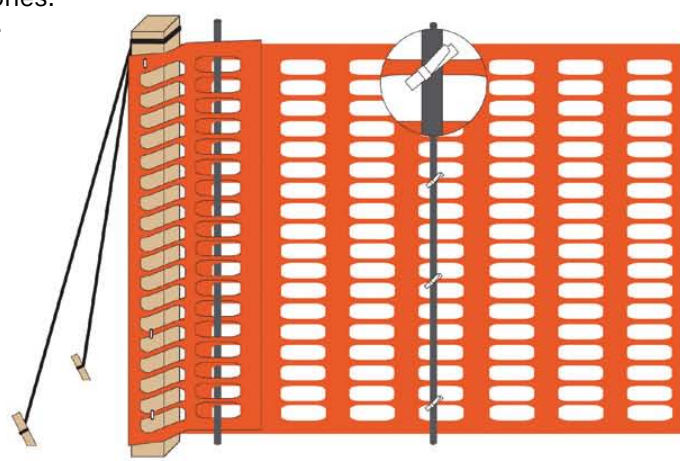

INSTRUCTIONS

(1) Your Tenax Fencing can be installed using metal or fiberglass posts. (2) If installing a 4 foot fence, use a post that is 5-6 feet tall. (3) Drive at least 1 foot of post into the ground using a mallet. (4) One post should be placed every 8-10 feet. (5) Fence should be stretched across posts and attached using 3 fence ties securing the fence at the top, middle, and bottom of each post. (6) To connect fence sections, overlap two ends and weave a wood slat through the overlapped strands, secure the slat with fence ties. For additional strength secure the joined area to a post.



TENAX CORPORATION

4800 E. Monument Street / Baltimore, MD 21205

phone 410-522-7000 / fax 410-522-3190 / www.tenaxus.com