



PROTECTION FROM THE INSIDE OUT



FUEL ADDITIVES

STA-BIL STORAGE®

Fuel Stabilizer

TREAT RATE:	1 OZ. TO 2.5 GAL
USAGE:	OUT OF SEASON STORAGE
AVAILABLE IN:	4 OZ, 8 OZ, 10 OZ, 16 OZ, 32 OZ, 1 GAL.



- America's #1 fuel stabilizer.
- Keeps fuel fresh for up to 24 months.
- For quick, easy starts after storage.
- Protects fuel system from gum & varnish buildup.
- Effective in all non ethanol gasoline & ethanol blended fuels.

STA-BIL 360° MARINE®

Ethanol Treatment & Fuel Stabilizer

TREAT RATE:	1 OZ. TO 10 GAL
USAGE:	IN-SEASON/BOAT STORAGE
AVAILABLE IN:	8 OZ, 10 OZ, 16 OZ, 32 OZ, 1 GAL.



- America's most preferred marine ethanol treatment.
- Prevents corrosion.
- Enhanced water remover.
- Helps clean fuel system to improve performance.
- Stabilizes fuel up to 12 months.
- Engineered for everyday use.

FUEL ADDITIVES

STA-BIL 360° PROTECTION®

Ethanol Treatment & Fuel Stabilizer

TREAT RATE:	1 OZ. TO 5 GAL
USAGE:	YEAR ROUND
AVAILABLE IN:	4 OZ, 8 OZ, 10 OZ, 32 OZ



- America's #1 ethanol treatment.
- Prevents corrosion caused by ethanol blended fuels.
- Increases power & fuel efficiency.
- Effective in ethanol & non-ethanol blended fuels.
- Stabilizes fuel for up to 12 months.
- Engineered for everyday use.

WHICH ADDITIVE DO I USE?

	STA-BIL 360° MARINE	STA-BIL 360° PROTECTION	STA-BIL STORAGE
I AM STORING FOR LESS THAN 1 YEAR	✗	✗	
I AM STORING FOR 1 YEAR OR LONGER			✗
I HAVE GUM AND VARNISH BUILDUP IN MY FUEL SYSTEM	✗	✗	
I USE ETHANOL BLENDED FUELS	✗	✗	
I HAVE ENCOUNTERED ROUGH IDLING RECENTLY	✗	✗	
DECLINING OCTANE	✗	✗	✗
I NOTICED A LITTLE WATER IN MY FUEL TANK	✗	✗	✗

DIESEL

STA-BIL® DIESEL ALL SEASON

TREAT RATE: 20 OZ. TO 150 GAL

USAGE: ALL SEASON

AVAILABLE IN: 20 OZ , 32 OZ



- Advanced year-round formula for all your additive needs
- Cleans and lubricates entire fuel system
- Demulsifies water
- Anti-gel protection down to -40°F
- Boosts Cetane
- Safe for all diesel engines

DIESEL

STA-BIL® POWER BOOST

TREAT RATE: 20 OZ. TO 150 GAL

USAGE: IN-SEASON

AVAILABLE IN: 20 OZ



- The Maximum Cetane Boost you can buy!
- Boosts cetane up to 7 numbers
- Improves fuel economy
- Improves available power
- Cleans and lubricates entire fuel system
- Safe for all diesel engines

STA-BIL® DIESEL ALL WINTER

TREAT RATE: 20 OZ. TO 150 GAL

USAGE: WINTER

AVAILABLE IN: 20 OZ, 32 OZ



- Protects against fuel gelling to - 40°F.
- Lowers cold filter plugging point by up to 36°F.
- Easy pour spout and anti-slip bottle.
- Safe for all diesel engines.

STA-BIL® DIESEL

TREAT RATE: 1 OZ. TO 10 GAL

USAGE: STORAGE

AVAILABLE IN: 32 OZ, GAL.,



- Fuel stabilizer.
- Helps remove water & prevents corrosion.
- Lubricates & cleans fuel system.
- Prevents sludge & sediment formation.
- Keeps diesel fuel fresh for up to 12 months during storage.
- Effective in all bio-diesel and ultra low sulfur diesel fuels.

AEROSOLS

STA-BIL® RUST STOPPER

USAGE: IN-SEASON/STORAGE
AVAILABLE IN: 13 OZ AEROSOL



- Stops existing rust & corrosion from spreading.
- Lubricates and penetrates.
- Long lasting & water resistant.
- Features an easy-to-use dual function sprayer.
- Works on electrical components and painted surfaces.

STA-BIL® FOGGING OIL

USAGE: STORAGE
AVAILABLE IN: 12 OZ AEROSOL



- Coats internal engine components.
- Lubricates and protects cylinders.
- Displaces moisture from metal to prevent corrosion.
- For all 2 & 4-cycle engines.
- Features an easy-to-use dual function sprayer.

AEROSOLS

STA-BIL® STARTING FLUID

USAGE: IN-SEASON
AVAILABLE IN: 11 OZ AEROSOL



- Guaranteed faster starts down to -65°F.
- Upper cylinder lube & corrosion inhibitor.
- For all gasoline and diesel engines.
- Higher ether content delivers faster starts.
- Saves starter and battery.
- Will not harm catalytic converters or oxygen sensors.

STA-BIL® CARB/CHOKE & PARTS CLEANER

USAGE: IN-SEASON
AVAILABLE IN: 12.5 OZ AEROSOL



- Dissolves gum, varnish, dirt, & carbon deposits.
- High grade formula makes cleaning unpainted metal parts easy.
- Aids in faster starting and smoother idling.
- Helps restore performance and gas mileage.
- For all carbureted internal combustion engines.
- Safe for catalytic converters and oxygen sensors.

SMALL ENGINE

STA-BIL® START YOUR ENGINES!

Fuel System Revitalizer

TREAT RATE: TREATS 1 GAL.

USAGE: START OF THE SEASON

AVAILABLE IN: 2 OZ



- For use in all small 2 and 4-cycle engines.
- Ensures quick starting coming out of storage and throughout the season.
- Smooths out rough idle and helps eliminate warm stalling.
- Easy, one-shot (dose) can.
- Effective as a fuel additive.
- Can also be used as a Starting Fluid.

STA-BIL® SMALL ENGINE PRO

Multi-System Additive

TREAT RATE: 1 OZ. TO 1 GAL

USAGE: IN-SEASON

AVAILABLE IN: 16 OZ



- Cleans injectors & carburetors.
- Lubricates valves & pistons.
- Quiets noisy engines.
- Protects against ethanol.

SMALL ENGINE

STA-BIL® 2-CYCLE OIL

With Fuel Stabilizer

TREAT RATE: WORKS IN 40:1 & 50:1

USAGE: IN-SEASON/STORAGE

AVAILABLE IN: 2.6 OZ, 13 OZ



- 40:1 | 50:1
- Stabilizes fuel for 12 months & protects against ethanol issues.
- Meets or exceeds all Jaso-FD requirements.
- For power mowers, chain saws, motorcycles, snowmobiles, ATV's, etc.
- Ashless - burns clean to minimize deposits, plug fouling, ring sticking, and port plugging.
- Protects vital engine parts.
- Pre-diluted for easy mixing with gasoline.

STA-BIL® FAST FIX

Fuel System Cleaner

TREAT RATE: 1 OZ. TO 2.5 GAL

USAGE: IN-SEASON

AVAILABLE IN: 4 OZ, 8 OZ



- Fixes poor or non-running engines.
- Corrects issues caused by ethanol blended fuels.
- Cleans fuel system.
- Prevents the need to disassemble engines.

SMALL ENGINE

STA-BIL® PUMP PROTECTOR

USAGE:	STORAGE
AVAILABLE IN:	4 OZ AEROSOL



- Protects pressure washer pump and other internal components during storage.
- Next gen anti-freeze & lubricant formula.
- Use before storage of pressure washer and at start-up for the season.
- Protects pistons and seals from damage during storage to ensure easy start-ups.
- Helps prevent harmful buildup of hard water mineral deposits.

STA-BIL® BLADE GUARD

USAGE:	ALL-SEASON
AVAILABLE IN:	12 OZ



- Maintains blade edge and performance.
- Cleans and lubricates.
- Plant friendly.
- Works on gas and electric equipment.
- Prevents rust.
- Can be used on saws, clippers, hedge trimmers, shears, and more!

SMALL ENGINE

STA-BIL® CERAMIC PRO-GUARD

USAGE:	ALL SEASON
AVAILABLE IN:	10 OZ



- Easy ceramic protection for your mower deck and snowblower.
- Protects against grass and snow buildup.
- Safe on both metal and plastic surfaces.
- Easy to use. Simply spray it on and let it cure!
- Advanced rust and corrosion protection.
- Works well with both electric and gas equipment.



SPORT

STA-BIL® SPORT BIKE CLEANER & PROTECTANT

USAGE:	ALL-SEASON
AVAILABLE IN:	10 OZ



- Keeps bikes looking like new.
- Cleans & shines.
- Protects bike from water, rust, corrosion, grit, and UV rays.
- Revives dull finishes.
- Works on metal, carbon fiber, rubber, plastic, paint, leather, and vinyl.



STA-BIL® SPORT BIKE CHAIN CLEANER & LUBRICANT

USAGE:	ALL-SEASON
AVAILABLE IN:	8 OZ



- Keeps bikes performing like new.
- Prevents rust.
- Also works on cables and derailleurs.
- Cleans and lubes in 1 step.
- Premium lubricant.



SPORT

STA-BIL® SPORT GUN CLP

USAGE:	ALL-SEASON
AVAILABLE IN:	8 OZ




- Cleans. Lubricates. Protects.
- Anti-wear additive keeps chambers in top-shape.
- Helps to prevent jamming.
- Cleans away gun powder and residue.
- Repels dust, dirt, and sand.
- Displaces water and protects firearms from corrosion.



GASOLINE STABILITY TEST


(% OF TIME INCREASE OF FUEL STABILITY VS BASE TEST FUEL)

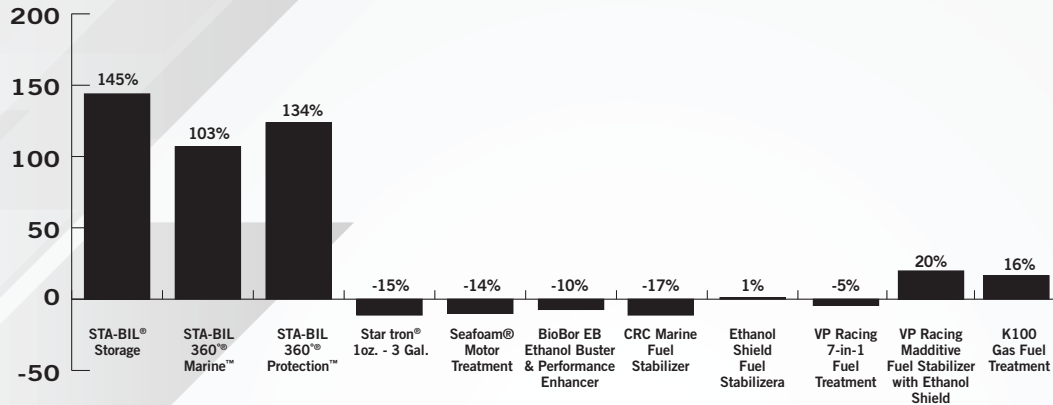

* Tests conducted using modified ASTM D525/ASTM D4814 Automotive Spark Ignition Engine Fuel standard, using E10 blended gasoline. ASTM D525 is a short-term stability test that accelerates oxidation by heating the fuel sample to 212°F, which may exceed normal fuel system operating temperatures. Test performed by independent testing lab. Base fuel contains no fuel stabilizing agents or other additives and may vary in composition from E10 fuel purchased at the pump. Chart shows % increase in fuel stability score - measured by the number of minutes until a 20% oxygen pressure drop occurs - for baseline test fuel blended with treatment additives per label instructions as compared to the stability score of the same baseline fuel, unadditized. All tested fuels, including the unadditized baseline test fuel, obtained a score greater than 240 minutes, the minimum standard for short-term stability under ASTM D4814, for fuel leaving a refinery.

Test Data from September 21st, 2019

THE STA-BIL® BRAND OUTPERFORMS COMPETITION IN CORROSION CONTROL TESTING


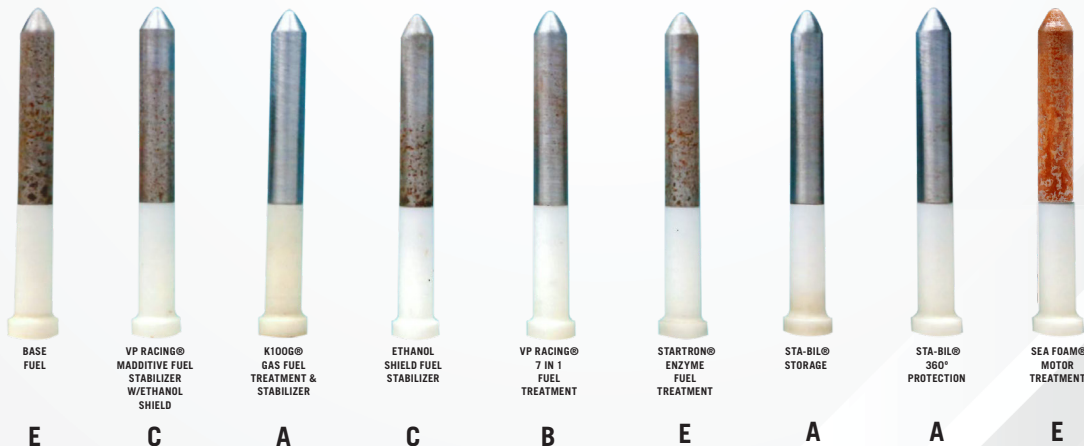


* CORROSION CONTROL TEST IS AN ACCELERATED CORROSION TEST BASED ON A MODIFICATION OF THE NACE™ M0172 TEST PROTOCOL, REPLACING DISTILLED WATER WITH SYNTHETIC SEA WATER PER ASTM D665 PART B. SYNTHETIC SEA WATER IS MORE LIKELY TO CAUSE CORROSION THAN DISTILLED WATER. UNTREATED CARBON STEEL RODS DEPICTED PLACED IN A BASE FUEL BLEND OF E10 GASOLINE AND SYNTHETIC SEA WATER FOR 4 HOURS. GRADES "A" & "B" ARE PASSING GRADES, "C" AND BELOW FAIL THE STANDARD. TESTING AND GRADING PERFORMED BY INDEPENDENT TESTING LAB. BASELINE TEST FUEL CONTAINS NO CORROSION-INHIBITING AGENTS OR OTHER ADDITIVES AND MAY VARY IN COMPOSITION FROM E10 FUEL PURCHASED AT THE PUMP. TEST DATA FROM 2019

CONNECT WITH US


CONNECT WITH US

FOLLOW AND SUBSCRIBE TO OUR PAGES AND CHANNELS FOR PRODUCT LAUNCHES, TUTORIALS, TRADE SHOWS AND DAILY UPDATES

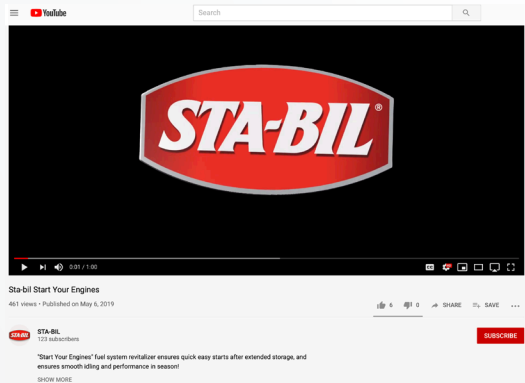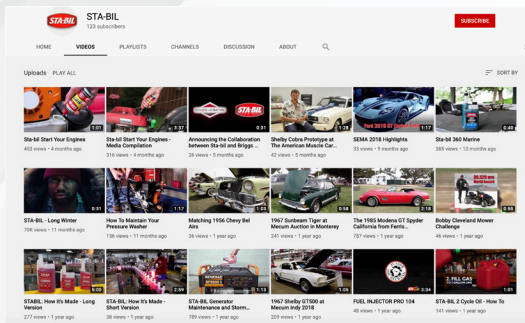

YOUTUBE

Check out our YouTube channel for product demonstrations and how-to videos!

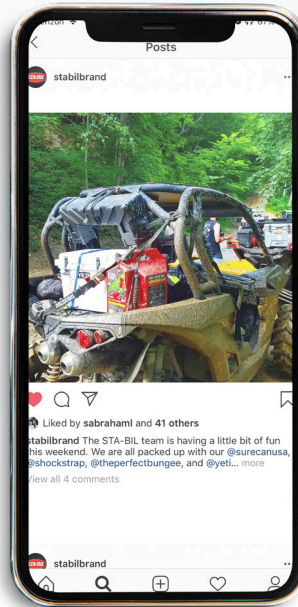


INSTAGRAM @STABILBRAND

Follow us on Instagram for daily updates, behind-the-scenes footage, new products, upcoming shows and much more!

FACEBOOK @STABILBRAND

Join our growing community on Facebook to keep up to date on our industry and all things STA-BIL®!

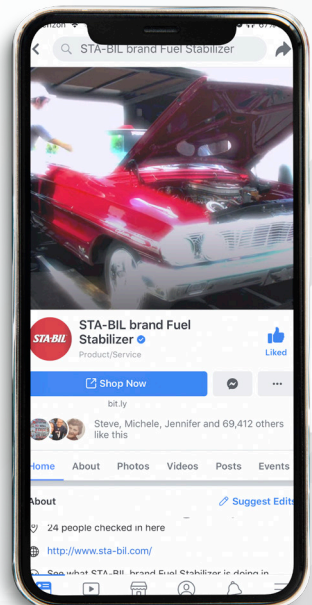

STA-BIL.COM

READY. WILLING. STA-BIL.

STA-BIL® STORAGE, PROTECTION & MARINE

How can I determine the age of my bottle?

The stamp/code on the back of the bottle will help determine the date it was manufactured. For example: 15120-83318-1658. This bottle based on the code was made in April 2015. The first two numbers determine the year and the three numbers tell you what day in the year based on the JULIAN Date Calendar.

Will over-dosage cause any harm?

No, over-dosage is perfectly OK. However, we do not recommend adding more than 4 times the recommended amount. If more than 4 times has been added we recommend to dilute the fuel.

Does STA-BIL® evaporate when spilled?

STA-BIL® will eventually evaporate, although this can take some time. However, a stain may occur depending on the type of surface it may have been spilled. For cleaning, we recommend alcohol or soap & water.

My bottle has turned a brown color, is it still OK to use?

Yes, it is normal for the dye of the liquid to change color and this is no indication of the product's efficacy.

What is the shelf life of all STA-BIL® products?

2 years after opening, or 5 years from date code.

STA-BIL® PRODUCTS ARE THE MOST RECOMMENDED ON THE MARKET



**READY.
WILLING.**



©2021 Gold Eagle Co.
4400 S. Kildare, Chicago, IL 60632
(800) 367-3245
www.sta-bil.com