

# WGen12000

## 12000 Open Frame Gasoline Portable Generator

12000 Running Watts | 15000 Peak Watts



50 State Model



Lift bracket included

Fuel efficient, 10.5 gallon fuel tank with fuel gauge, that runs 16 hrs at 25% load

VFT meter displays volts, frequency, and lifetime hours

Two 5V USB ports for charging sensitive electronics such as phones or tablets

Transfer Switch Ready 120/240V 50A outlet

Westinghouse ST Switch (Portable Automatic Transfer Switch) outlet

Push-button electric start, lights up green when unit is on


**SMART IDLE**  
FOR INCREASED FUEL EFFICIENCY

**SINE WAVE OUTPUT**  
**<5% THD**  
**AVR EQUIPPED**  
*(Less Than 5% Total Harmonic Distortion)*



Heavy Duty 22 HP 713cc V-Twin Westinghouse engine

### What Comes in the Box

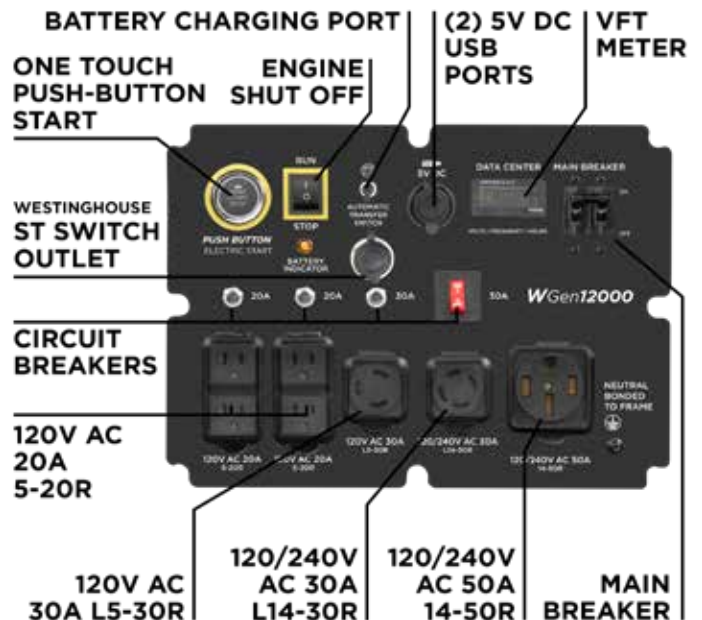

# WGen12000

## Generator Specifications



Gasoline Running Watts	12000
Gasoline Peak Watts	15000
Running Amps	100A @ 120V 50A @ 240V
Peak Amps	125A @ 120V 63A @ 240V
AC Voltage	120/240 Volts
DC Voltage	5 Volts
AC Frequency	60 Hz
Parallel Capable	No
Engine Horse Power (HP)	22 HP
Total Harmonic Distortion (THD)	<5%
Automatic Voltage Regulator (AVR)	Yes
Low Idle Control	Yes
Starting System	Electric, Remote
Battery Included	Yes
Battery Charger Included	Yes
Remote Start Fob Included	Yes (factory paired)
Remote Start Distance (yards/meters)	109 yd. (100 m.)
Push Button Start	Yes
Mobile App Compatible	No
Engine Displacement	713cc
Engine Brand	Westinghouse
Engine Type	V-Twin
Engine RPM	3600
Operational Volume	As low as 74 dBA
Spark Plug (included)	Torch F7TC
Carburetor Kit Required to Operate at Altitude	Yes
Altitude Carburetor Kit Number (sold separate)	140574
Engine Lubrication	Pressure
Recommended Oil	SAE 10W30
Oil Bottle Size (included)	1.6 qt. (51.2 oz)
Oil Capacity (Quarts/Ounces)	1.6 qt. (51.2 oz)
Low Oil Shutdown	Automatic
Fuel Type	Unleaded Gasoline, 10% Ethanol or less
Fuel Shut Off	Manual
Fuel Tank Material	Steel
Fuel Tank Capacity (Gallons/Liters)	10.5 gal. (40 L)

Run Time at %25 Load (hrs.)	16 hrs.
Run Time at %50 Load (hrs.)	11 hrs.
Gasoline Fuel Gauge	Yes
Choke type	Automatic
AC Outlets	(2) 120V 20A (5-20R), (1) 120V 30A (L5-30R), (1) 120/240V 30A (L14-30R), (1) 120/240V 50A (14-50R)
DC Outlets	(2) 5V USB ports
Ground	Neutral Bonded to Frame
Covered Outlets	Yes
Transfer Switch Ready	Yes
Westinghouse Portable Transfer Switch Ready	Yes
Volts, Frequency, Lifetime Hour Meter	Yes
GFCI Outlets	No
OSHA Compliant	No
LED Data Center	No
RV Ready Outlet	Yes
Overload Protection (circuit breaker)	Yes
Handle	Yes
Emissions	EPA, CARB
Canada CSA Compliant	No
Heavy Duty Wheel Kit Included	Yes
Lift Hook Bracket	Yes
Muffler	Pulse-Flo™
Spark Arrestor	Yes
Residential Warranty	3 Years
Commercial Warranty	1 Year
Assembled Length in. (mm)	34 in (870mm)
Assembled Width in. (mm)	31 in (800mm)
Assembled Height in. (mm)	35 in (890mm)
Carton Length in. (mm)	35 in (900mm)
Carton Width in. (mm)	32 in (820mm)
Carton Height in. (mm)	38 in (970mm)
Dry Unit Weight lb. (kg)	352 lb. (98kg)
Shipping Weight lb. (kg)	418 lb. (103kg)
UPC	853544008274
GTIN	00853544008274

12072018KD  
 ©2019 Westinghouse Outdoor Power Equipment  
 Specifications are subject to change without notice  
 Westinghouse Portable Power  
 777 Manor Park Dr., Columbus, OH 43228

**Have questions? Contact our team  
 at [service@wpowereq.com](mailto:service@wpowereq.com) or call  
 855.944.3571**

