



2022/2023

NEW PRODUCT CATALOG



LIMITED 1 YEAR WARRANTY

WHAT IS COVERED

DK2 Inc. warrants to the original purchaser of any DK2 product that it will be free and clear of manufacturing defects in workmanship and materials under normal use and service for a period of one (1) year from the date of the original purchase.

If within one (1) year from the original date of purchase this product fails due to defect in material or workmanship, Detail K2 will repair, replace, or supply any defective part at our option. Upon expiry of one (1) year, Detail K2 will have no further liability related to the product. Detail K2 does not authorize any party, including its authorized distributors or dealers, to offer any other warranty on behalf of Detail K2 Inc.

THIS WARRANTY DOES NOT COVER OR APPLY TO:

- (a) Damage to the product due to misuse, mishandling and abuse
- (b) Improper installation, maintenance and storage
- (c) Expendable parts such as nuts and bolts, pins and springs
- (d) Normal wear and tear
- (e) Consequential damage & incidental damages such as damage to persons or property

PROCEDURE FOR OBTAINING A RETURN AUTHORIZATION

Within the one (1) year warranty period, the purchaser of the product must notify an authorized distributor or dealer of the claimed defect and provide proof of original purchase. At this time the validity of the claim will be determined and a Return Goods Authorization Number (RGA) will be issued if approved. No returned product will be accepted under warranty unless accompanied by an RGA# issued by Detail K2 Inc.

RESOLUTION FOR A DEFECTIVE PRODUCT

Detail K2 Inc. will at its option repair or replace the defective product covered by this warranty. The repaired product will be shipped to the purchaser upon completion. All transportation charges shall be the responsibility of the purchaser. Any damage in transit will be the responsibility of the carrier or at the risk of the purchaser.

HITCH-MOUNTED SNOW PLOW



8

ITEM NUMBER / UPC

AVAL8219 / 826518004992
 AVAL8422 / 826518005005
 AVAL8826 / 826518005708

FEATURES

- Fits most light trucks and SUV's
- Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
- An electric winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1-year limited warranty

DESCRIPTION

The DK2 Universal T-Frame Mounted Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage.

Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3cm (W) x 48.3cm (H)
ASSEMBLED WEIGHT	265lb (120.2kg)
SHIPPING WEIGHT	288lb (130.6kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2cm (L) x 81.3cm (W) x 45.7cm (H)

ITEM NUMBER	AVAL8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4cm (W) x 55.9cm (H)
ASSEMBLED WEIGHT	283lb (128.4kg)
SHIPPING WEIGHT	296lb (134.3kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8cm (L) x 81.3cm (W) x 45.7cm (H)

ITEM NUMBER	AVAL8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5cm (W) x 66cm (H)
ASSEMBLED WEIGHT	296lb (134.3kg)
SHIPPING WEIGHT	341lb (154.7kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8cm (L) x 88.9cm (W) x 43.2cm (H)





DESCRIPTION

The DK2 Universal T-Frame Mounted ELITE Series Snow Plows allow you to quickly and effectively remove snow from your driveway or small parking lot. These plows simply slide into a 2" front mount receiver for easy removal and storage. Each snow plow ships complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit, and a wireless electric actuator for extra strength and reliability. Each plow kit will also include a set of blade stiffeners for added strength by creating a 3 point connection.

SPECIFICATION

ITEM NUMBER	AVAL8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3cm (W) x 48.3cm (H)
ASSEMBLED WEIGHT	265lb (120.2kg)
SHIPPING WEIGHT	321lb (145kg)
SHIPPING DIMENSIONS	46" (L) x 36" (W) x 18" (H) 116.8cm (L) x 91.4cm (W) x 45.7cm (H)

ITEM NUMBER	AVAL8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4cm (W) x 55.9cm (H)
ASSEMBLED WEIGHT	283lb (128.4kg)
SHIPPING WEIGHT	334lb (151.5kg)
SHIPPING DIMENSIONS	44" (L) x 32" (W) x 18" (H) 111.8cm (L) x 81.3cm (W) x 45.7cm (H)

ITEM NUMBER	AVAL8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5cm (W) x 66cm (H)
ASSEMBLED WEIGHT	296lb (134.3kg)
SHIPPING WEIGHT	341lb (154.7kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8cm (L) x 88.9cm (W) x 43.2cm (H)



- Fits most light trucks and SUV's
- Easy to mount - simply slides into a 2" class III front mount receiver in seconds. Slide out and roll away for storage **1**
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing and IP67 dust and water rated **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet

CUSTOM MOUNTED SNOW PLOW

10



DESCRIPTION

All DK2 Snow Plows allow you to quickly & effectively remove snow from your driveway or small parking lot. DK2's range of personal plows each mount on to a vehicle specific custom mounting brackets.

Ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a 3,000lb wireless electric winch.

SPECIFICATION

ITEM NUMBER	RAMPAGE II • RAMP8219
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3cm (W) x 48.3cm (H)
ASSEMBLED WEIGHT	265lb (120.2kg)
SHIPPING WEIGHT	280lb (127kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2cm (L) x 81.3cm (W) x 45.7cm (H)
ITEM NUMBER	STORM II • STOR8422
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4cm (W) x 55.9cm (H)
ASSEMBLED WEIGHT	283lb (128.4kg)
SHIPPING WEIGHT	287lb (130.2kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2cm (L) x 81.3cm (W) x 45.7cm (H)
ITEM NUMBER	SUMMIT II • SUMM8826
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5cm (W) x 66cm (H)
ASSEMBLED WEIGHT	296lb (134.3kg)
SHIPPING WEIGHT	301lb (136.5kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8cm (L) x 88.9cm (W) x 43.2cm (H)



ITEM NUMBER / UPC

RAMP8219 / 693495992167
STOR8422 / 693495992174
SUMM8826 / 693495992181

FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- A wireless winch lifts the blade, controlled from inside your warm vehicle for easy up and down snow control **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Locking castors allow easy plow attachment, removal, and roll away storage – just lower the wheels and roll the unit to wherever you want it
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet



DESCRIPTION

DK2's line of personal snow plows just got better! The DK2 ELITE Series Snow Plow line up takes its simple yet effective design and improves on it with a wireless actuator for ultimate reliability.

DK2's ELITE Series each mount on to a vehicle specific custom mounting brackets. Each snow plow ships in a single carton complete with hardened steel cutting edge scraper, rubber snow deflector, polymer-wrapped wire rope plow markers, skid shoes, castor kit for easy storage, and a wireless electric actuator kit.

SPECIFICATION

ITEM NUMBER	RAMPAGE II ELITE • RAMP8219ELT
BLADE DIMENSIONS	82" (W) x 19" (H) 208.3cm (W) x 48.3cm (H)
ASSEMBLED WEIGHT	265lb (120.2kg)
SHIPPING WEIGHT	280lb (127kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2cm (L) x 81.3cm (W) x 45.7cm (H)
ITEM NUMBER	STORM II ELITE • STOR8422ELT
BLADE DIMENSIONS	84" (W) x 22" (H) 213.4cm (W) x 55.9cm (H)
ASSEMBLED WEIGHT	283lb (128.4kg)
SHIPPING WEIGHT	287lb (130.2kg)
SHIPPING DIMENSIONS	43" (L) x 32" (W) x 18" (H) 109.2cm (L) x 81.3cm (W) x 45.7cm (H)
ITEM NUMBER	SUMMIT II ELITE • SUMM8826ELT
BLADE DIMENSIONS	88" (W) x 26" (H) 223.5cm (W) x 66cm (H)
ASSEMBLED WEIGHT	296lb (134.3kg)
SHIPPING WEIGHT	301lb (136.5kg)
SHIPPING DIMENSIONS	46" (L) x 35" (W) x 17" (H) 116.8cm (L) x 88.9cm (W) x 43.2cm (H)



ITEM NUMBER / UPC

RAMP8219ELT / 826518005326
 STOR8422ELT / 826518005333
 SUMM8826ELT / 826518004916

FEATURES

- Fits most light trucks and SUV's
- Easy to mount – simply slides onto your custom vehicle specific mounting brackets in seconds **1**
- Slide out and roll away for storage
- An electric actuator lifts the blade, controlled from inside your warm vehicle for easy up and down snow control with built-in clutch, a strong chain, and uses less amperage than the winch, built with a completely sealed gearbox and housing and IP67 dust and water rated **2**
- Blade angles set and lock manually with a single lever lifting a pin to 3 blade locking positions: straight on, angled to the right, and angled to the left
- Powder coated all-steel with UV protected paint **3**
- Wireless remote control included with the kit **4**
- Flip down locking castors allow easy plow attachment, removal, and roll away storage - just lower the wheels and roll the unit to wherever you want it
- Each snow plow kit also includes a set of blade stiffeners for added strength
- ISO 9001 certified manufacturer
- 1-year limited warranty
- Ships in a single carton on a standard size pallet

FULLY HYDRAULIC EVEREST SNOW PLOW

12



ITEM NUMBER

EVST9022

UPC

826518005579

DESCRIPTION

DK2 is proud to bring you the ultimate snow plow solution in our line up - the DK2 Everest. This prosumer, fully hydraulic snow plow kit provides you the opportunity to clear your parking lot, driveway, or lane way whenever required. With our fully hydraulic system you can raise, lower, and angle the snow plow blade from inside your vehicle using our wired hand held remote. For extreme durability against the elements and rust, DK2 combines an industrial powder-coated paint finish on the blade with hot dipped galvanized hardware components to keep your plow looking new for years.

The plow itself simply clips to a DK2 custom fitted vehicle mounting system and can pretty much mount to anything that's fit to push snow.

SPECIFICATION

ITEM NUMBER	EVEREST - EVST9022
BLADE DIMENSIONS	88" (W) x 22" (H) 223.5cm (W) x 55.9cm (H)
ASSEMBLED WEIGHT	425lb (192.8kg)
SHIPPING WEIGHT	450lb (204.1kg)
SHIPPING DIMENSIONS	48" (L) x 42" (W) x 40" (H) 121.9cm (L) x 106.7cm (W) x 101.6cm (H)
CONSTRUCTION	Steel tube and sheet
COLOR/FINISH	Black industrial powder-coated blade skin and all other components
LIFT SYSTEM	Hydraulic
ANGLING SYSTEM	Hydraulic, multiple positions
CONTROL SYSTEM	Wired remote control to lift, lower and angle left or right
VEHICLE MOUNTING SYSTEM	Custom bolt-on mounting brackets *Sold separately
SCRAPER BLADE	Powder-coated steel, replaceable
INCLUDED	Snow deflector, skid shoes



FEATURES

- Ships partially assembled (mount & wiring required)
- Simple bolt on custom fitted mounting brackets, no drilling or welding required (sold separately) **1**
- Hydraulic system lifts and lowers blade **2**
- Light weight, no need to alter stock suspension
- Black UV powder coated components with an industrial painted blade skin **3**
- Self-leveling foot provides max blade tip clearance when the blade is fully raised
- Skid shoes to assist guiding the blade edge over uneven terrain or from possibly marking those more delicate driveways
- Snow deflector to assist directing snow forward and also minimizing windshield spray
- Wired hand held control **4**
- Blade hardware holds the hydraulic pump so it can be rolled away from the vehicle rather than being left on the truck with the mount
- Thicker trip springs to ensure tension remains strong and coils tight for optimal performance when encountering obstacles
- Existing holes in plow frame make it easy to add bolt-on accessories
- Bolt-on accessories and upgrades available

3-INCH DISK CHIPPER SHREDDER

ITEM NUMBER

OPC533

UPC

827518007235

DESCRIPTION

Don't let its size fool you. This small unit chews through any tree up to 3 inches, and demolishes branches, leaves, and garden composting using its double edge cutting blades with direct shaft drive centrifugal force, powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine.

The OPC533 also features extra large feed chutes with a heavy duty deflector, drop stand and a handy removable tow bar for compact storage, locking wheels that secure the unit in place when in use, and a quick latch chute to access the cutter chamber with ease.

SPECIFICATION

ENGINE	KOHLER® 2000 Series CH265 6.5HP 196cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm)
WHEELBASE	26" (66cm)
CHIPPING CAPACITY	Ø3" (Ø7.6cm) (side feed chute) Ø3/8" (Ø0.95cm) (top-loading hopper)
CUTTERS	Double edge chipper blades
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	63" (L) x 26" (W) x 43" (H) 160cm (L) x 66cm (W) x 109.2cm (H)
WEIGHT	165lb (74.8kg)
SHIPPING DIMENSIONS	36" (L) x 22" (W) x 25" (H) 91.4cm (L) x 55.9cm (W) x 63.9cm (H)
SHIPPING WEIGHT	185lb (83.9kg)
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine **1**
- Chips through trees up to Ø3" (Ø7.6cm) through the side feed chute and brush up to Ø3/8" (Ø0.95cm) through the top-loading hopper
- Direct drive 10.7ft/lb (14.5Nm) gross torque with 2 double edge cutters
- 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm) tires on ATV-locking wheels with a 26" (66cm) wheelbase **2**
- Extra large top loading hopper for branches and leaves **3**
- Large feed chute for trees **4**
- 2" (5.08cm) coupler
- Includes 2-year KOHLER® parts and labor and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



3-INCH DISK CHIPPER SHREDDER

ITEM NUMBER

OPC533 (NEW)

17

UPC

827518007235



DESCRIPTION

Don't let its size fool you. This small unit chews through any tree up to 3 inches, and demolishes twigs, leaves, and garden composting using its double edge cutting blades with direct shaft drive centrifugal force, powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine.

The OPC533 also features extra large feed chutes with a heavy duty deflector, drop stand and a handy removable tow bar for compact storage, locking wheels that secure the unit in place when in use, and a quick latch chute to access the cutter chamber with ease.

FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine **1**
- Chips through trees up to Ø3" (Ø7.6cm) through the side feed chute and brush up to Ø3/8" (Ø0.95cm) through the top-loading hopper
- Direct drive 10.7ft/lb (14.5Nm) gross torque with 2 double edge cutters
- 4.10/3.50-4 tires wheels with a 26" (66cm) wheelbase **2**
- Extra large top loading hopper for branches and leaves **3**
- Large feed chute for trees **4**
- 2" (5.08cm) coupler
- Includes 2-year KOHLER® parts and labor and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

SPECIFICATION

ENGINE	KOHLER® 2000 Series RH265 6.5HP 196cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	4.10/3.50-4 Ø10.2" (Ø26cm) OD x 3.9" (10cm)
WHEELBASE	26" (66cm)
CHIPPING CAPACITY	Ø3" (Ø7.6cm) (side feed chute) Ø3/8" (Ø0.95cm) (top-loading hopper)
CUTTERS	Double edge chipper blades
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	63" (L) x 26" (W) x 43" (H) 160cm (L) x 66cm (W) x 109.2cm (H)
WEIGHT	165lb (74.8kg)
SHIPPING DIMENSIONS	36" (L) x 22" (W) x 25" (H) 91.4cm (L) x 55.9cm (W) x 63.9cm (H)
SHIPPING WEIGHT	185lb (83.9kg)
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



3-INCH DISK CHIPPER SHREDDER

ITEM NUMBER

OPC503

UPC

826518005487

FEATURES

- Powered by a KOHLER® Command PRO® CH270 7HP 208cc engine ¹
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6cm) through the side feed chute and brush up to Ø3/8" (Ø0.95cm) through the top-loading hopper
- Extra large feed chutes ²
- Drop stand and handy removable tow bar ³
- 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm) tires on ATV-locking wheels with a 28" (71.1cm) wheelbase ⁴
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

DESCRIPTION

The ATV-towable 3-inch direct drive OPC503 chipper shredder is powered by a KOHLER® Command PRO® CH270 7HP 208cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm)
WHEELBASE	28" (71.1cm)
CHIPPING CAPACITY	Ø3" (Ø7.6cm) (side feed chute) Ø3/8" (Ø0.95cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	71" (L) x 36.5" (W) x 48" (H) 180.3cm (L) x 92.7cm (W) x 121.9cm (H)
WEIGHT	187lb (84.8kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 22" (H) 109.2cm (L) x 58.4cm (W) x 55.9cm (H)
SHIPPING WEIGHT	199lb (90.3kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



3-INCH DISK CHIPPER SHREDDER

ITEM NUMBER

OPC513

19

UPC

XXXXXXXXXXXX



DESCRIPTION

The ATV-towable 3-inch direct drive OPC513 chipper shredder is powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, and 4.10/3.50-4 tires for off-road towing.

SPECIFICATION

ENGINE	KOHLER® 2000 Series RH265 6.5HP 196cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	4.10/3.50-4 Ø10.2" (Ø26cm) OD x 3.9" (10cm)
WHEELBASE	21.7" (55cm)
CHIPPING CAPACITY	Ø3" (Ø7.6cm) (side feed chute) Ø3/8" (Ø0.95cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	41.7" (L) x 34.3" (W) x 37.4" (H) 106cm (L) x 87cm (W) x 95cm (H)
WEIGHT	136.7lb (62kg)
SHIPPING DIMENSIONS	29.5" (L) x 22" (W) x 20.9" (H) 75cm (L) x 56cm (W) x 53cm (H)
SHIPPING WEIGHT	158.7lb (72kg)
WARRANTY	2-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine **1**
- Direct drive combo chipper shredder with double edge chip and hammer shredders
- Perfect for trees up to 3" (7.6cm) in diameter, and twigs, leaves and garden composting up to 3/8" (0.95cm) in diameter
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 4.10/3.50-4 Ø10.2" (Ø26cm) OD x 3.9" (10cm) tires **4**
- Includes 2-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



3-INCH DISK CHIPPER SHREDDER & VACUUM

20



ITEM NUMBER

OPC503V

UPC

827518006979

DESCRIPTION

The ATV-towable 3-inch direct drive OPC503V chipper shredder vacuum combo is powered by a KOHLER® Command PRO® CH270 7HP 208cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, a removable key lock shutoff, and ATV-locking off-road tires.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm)
WHEELBASE	28" (71.1cm)
CHIPPING CAPACITY	Ø3" (Ø7.6cm) (side feed chute) Ø3/8" (Ø0.95cm) (top-loading hopper)
CUTTERS	Double edge chipper blades and quad hammer shredders
CHIPPER SHREDDER	Leaves, brush, garden compost
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	71" (L) x 36.5" (W) x 48" (H) 180.3cm (L) x 92.7cm (W) x 121.9cm (H)
WEIGHT	187lb (84.8kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 22" (H) 109.2cm (L) x 58.4cm (W) x 55.9cm (H)
SHIPPING WEIGHT	199lb (90.3kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7HP 208cc engine **1**
- Vacuum kit included **2**
- Direct drive combo chipper shredder with double edge chip and quad hammer shredders
- Chips through trees up to Ø3" (Ø7.6cm) through the side feed chute and brush up to Ø3/8" (Ø0.95cm) through the top-loading hopper
- Extra large feed chutes **3**
- Drop stand and handy removable tow bar **4**
- 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm) tires on ATV-locking wheels with a 28" (71.1cm) wheelbase **5**
- Removable key shutoff
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



4-INCH DISK CHIPPER

ITEM NUMBER

OPC514

21

UPC

827518007266



DESCRIPTION

Introducing the OPC514 4-inch disk chipper, powered by a KOHLER® Command PRO® CH440 14HP 429cc engine that gives you the power to devour trees and branches up to 4.5 inches in diameter.

This unit's expulsion chute is perfect for pickup truck bed height, and it's dual-belt drive disk chipping capability keeps the chipper more compact than other comparable models.

The OPC514 is also D.O.T. approved and should be towed at a maximum of 25 MPH with the included 2" hitch receiver, tow bar and free jack, this unit can be moved to different locations with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Direct drive 22.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16.1" (Ø40.9cm) OD x 3.75" (9.5cm)
CHIPPING CAPACITY	Ø4.5" (Ø11.4cm)
CUTTER DISK	Dual-belt drive 0.67" (1.7cm) x Ø35.4" (Ø90cm) centrifugal clutch
SELF-FEEDING	Auto blade feeding
EXPULSION CHUTE	Adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	89.4" (L) x 39.4" (W) x 65.2" (H) 227.1cm (L) x 100.1cm (W) x 165.6cm (H)
WEIGHT	573lb (259.9kg)
SHIPPING DIMENSIONS	41.4" (L) x 30.4" (W) x 49.3" (H) 105.2cm (L) x 77.2cm (W) x 125.2cm (H)
SHIPPING WEIGHT	595lb (269.9kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Chips through trees and branches up to 4.5" (11.4cm) in diameter.
- Built with dual-belt drive 0.67" (1.7cm) x Ø35.4" (Ø90cm) centrifugal clutch disk **2**
- Tow bar and jack included **3**
- D.O.T. approved 4.80-8 Ø16.1" (Ø40.9cm) tires to move the unit to different job sites easily
- Designed to be pickup truck bed height for effortless chip loading
- Tool-free disk chamber access
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



4-INCH KINETIC DRUM CHIPPER

22



ITEM NUMBER

OPC524

UPC

827518007259

DESCRIPTION

The OPC524 4-inch kinetic chipper is powered by a KOHLER® Command PRO® CH270 7HP 208cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop.

The engine delivers 10.5ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 4-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3cm) OD x 5" (12.7cm) tires on Ø6" (15.2cm) x 4.5" (11.4cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø4" (Ø10.16cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø4" (Ø10.16cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1cm (L) x 76.2cm (W) x 116.8cm (H)
WEIGHT	300lb (136.1kg)
SHIPPING DIMENSIONS	34" (L) x 22" (W) x 35" (H) 86.4cm (L) x 55.9cm (W) x 88.9cm (H)
SHIPPING WEIGHT	330lb (149.7kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7HP 208cc engine **1**
- Chips through trees and branches up to 4" (10.2cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 4" (10.2cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3cm) OD x 5" (12.7cm) tires on Ø6" (Ø15.2cm) x 4.5" (11.4cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



5-INCH KINETIC DRUM CHIPPER

ITEM NUMBER

OPC525

23

UPC

827518008560



DESCRIPTION

The OPC525 5-inch kinetic chipper is powered by a KOHLER® Command PRO® CH395 9.5HP 277cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop.

The engine delivers 13.9ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 5-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5HP 277cc
GEARBOX	Direct drive 13.9ft/lb (18.8Nm) gross torque
WHEELS & TIRES	175/70-6 Ø13.5" (Ø34.3cm) OD x 5" (12.7cm) tires on Ø6" (15.2cm) x 4.5" (11.4cm) bearing-mounted ATV rims
CHIPPING CAPACITY	Ø5" (Ø12.7cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø5" (Ø12.7cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1cm (L) x 76.2cm (W) x 116.8cm (H)
WEIGHT	308.6lb (140kg)
SHIPPING DIMENSIONS	35.8" (L) x 22" (W) x 37.8" (H) 91cm (L) x 56cm (W) x 96cm (H)
SHIPPING WEIGHT	352.7lb (160kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5HP 277cc engine **1**
- Chips through trees and branches up to 5" (12.7cm) in diameter
- Dual-belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 5" (12.7cm) in diameter **2**
- 175/70-6 Ø13.5" (Ø34.3cm) OD x 5" (12.7cm) tires on Ø6" (Ø15.2cm) x 4.5" (11.4cm) bearing-mounted ATV rims for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and E-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



5-INCH AUTO-FEED ELECTRIC START DISK CHIPPER

24



ITEM NUMBER

OPC505AE

UPC

827518006702

DESCRIPTION

Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine featuring electric start-up and a self contained auto-feed system with hydraulic roller speeds up to 600RPM. The OPC505AE features a 3600RPM drive and auto-adjusting feed chamber to demolish trees up to 5.25 inches in diameter, internal free-spinning teeth, large feed chute, adjustable pickup height rotational expulsion chute, tool-free 180° adjustable 61-inch chip chute perfect for pickup truck bed loading, and includes a set of lockout keys, safety glasses, ear protection, work gloves, oil bottle and assembly tools.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Direct drive 22.7ft/lb (30.7Nm) gross torque
WHEELS & TIRES	D.O.T. approved 8.00-7 Ø16" (Ø40.6cm) OD
WHEELBASE	47" (119.4cm)
CHIPPING CAPACITY	Ø5.25" (Ø13.3cm)
BLADES & TEETH	High-speed disk-mounted steel and free-spinning internal 45# steel teeth
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32cm) brush to Ø5.25" (Ø13.3cm) trees
SELF-FEEDING	Auto blade feeding hydraulic system
EXPULSION CHUTE	Truck bed height with 180° adjustable spout
COUPLER	2" (5.08cm)
DIMENSIONS	91" (L) x 40" (W) x 69" (H) 231.1cm (L) x 101.6cm (W) x 175.3cm (H)
WEIGHT	638lb (289.4kg)
SHIPPING DIMENSIONS	63" (L) x 33" (W) x 45" (H) 160cm (L) x 83.8cm (W) x 114.3cm (H)
SHIPPING WEIGHT	726lb (329.3kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine ¹
- Dual swing-open chutes for easy drum access
- High-speed disk chipper shredder with free-spinning internal teeth ²
- 600RPM hydraulic feed
- Auto blade feeding system
- Auto adjust cutters for brush up to 5.25" (13.3cm) diameter trees
- All-terrain on/off road tires D.O.T. approved (not for highway use) with included 2" (5.08cm) ball tow bar ³
- Dual, tool free rotational spout on chip chute
- Extra-large reinforced feed hopper with integrated equipment moving handles and e-stop shutoff ⁴
- Electric start (battery included)
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**





ITEM NUMBER

OPC506

25

UPC

826518005517

DESCRIPTION

The DK2 POWER OPC506 is a 6-inch cyclonic chipper shredder is powered by a KOHLER® Command PRO® CH440 14HP 429cc engine, equipped with dual 13-inch, double-edge reversible cutting blades that auto-adjust to pulverize trees and brush up to 6.25 inches in diameter.

Featuring large quick open hoppers, 59-inch truck bed height chip chute with adjustable cast iron rotating hood, easy drop stand, removable tow bar, 2-inch hitch, premium built-in tool box, Key shutoff with lock out safety switch. Extended 48-inch safety stability axle with D.O.T. tires. Safety kit includes tools, glasses, ear protection and gloves.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Dual direct drive 22.7ft/lb (30.7Nm) gross torque
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø17.5" (Ø44.5cm) OD x 5.2" (13.2cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9cm)
BLADES	Steel double edge reversible
CHIPPER SHREDDER	Auto-adjusting from Ø3/8" (Ø0.95cm) brush to Ø6.5" (Ø16.5cm) trees
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	2" (5.08cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1cm (L) x 119.4cm (W) x 149.9cm (H)
WEIGHT	395lb (179.2kg)
SHIPPING DIMENSIONS	44" (L) x 26" (W) x 44" (H) 111.8cm (L) x 66cm (W) x 111.8cm (H)
SHIPPING WEIGHT	461lb (209.1kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Reversible double-edge reversible high-speed cutting blades **2**
- Auto-adjusting cyclonic drum chamber deteriorates trees and brush up to 6.25" (15.9cm) in diameter
- Large, quick-open hoppers
- 59" (149.9cm) pickup truck bed height expulsion chute with adjustable cast iron rotating hood and easy drop stand **3**
- Removable tow bar with 2" (5.08cm) hitch receiver **4**
- Premium built-in toolbox
- Key shutoff with lock out safety switch
- Extended 48" (121.9cm) safety stability axle
- D.O.T. approved 4.80-8 Ø17.5" (Ø44.5cm) OD x 5.2" (13.2cm) **5**
- Safety kit includes tools, glasses, ear protection and gloves
- Integrated chute handles, powder-coated for durability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



6-INCH KINETIC CYCLONIC ELECTRIC START DRUM CHIPPER SHREDDER

ITEM NUMBER

OPC566E

UPC

827518006757

26



DESCRIPTION

The OPC566E is a 6-inch kinetic cyclonic chipper powered by an electric start, direct drive KOHLER® Command PRO® CH440 14HP 429cc engine with 22.7ft/lb gross torque to demolish trees up to 6.25 inches in diameter. Equipped with double edge reversible 12-inch cutting blades that auto-adjust to pulverize trees and brush, dual tool-free swing-open chutes that quickly open for easy drum access, D.O.T. approved tires and a 48-inch extended axle for uneven ground and towing stability with front articulated ground wheels for easy equipment moving, a 2-inch hitch receiver and tow bar, and a rotational expulsion chute pickup truck height for bed loading.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Direct drive 22.7ft/lb (30.7Nm) gross torque
REAR WHEELS & TIRES	D.O.T. approved 4.80-8 Ø15" (Ø41.9cm) OD x 4.25" (10.8cm) on 9" (22.9cm) rims
FRONT WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4cm) OD on Ø5" (Ø12.7cm) rims
WHEELBASE	48" (121.9cm)
CHIPPING CAPACITY	Ø6.25" (Ø15.9cm)
CUTTERS	12" (30.5cm) double edge reversible chipper blades
CHIPPER SHREDDER	Auto-adjusting from Ø1/8" (Ø0.32cm) up to Ø6.25" (Ø15.9cm) trees and brush
EXPULSION CHUTE	59" (149.9cm) truck bed height with 180° adjustable spout
COUPLER	2" (5.08cm)
DIMENSIONS	102" (L) x 47" (W) x 59" (H) 259.1cm (L) x 119.4cm (W) x 149.9cm (H)
WEIGHT	594lb (269.4kg)
SHIPPING DIMENSIONS	45" (L) x 31" (W) x 48" (H) 114.3cm (L) x 78.7cm (W) x 121.9cm (H)
SHIPPING WEIGHT	726lb (329.3kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Dual-belt drive drum transmission with 12" (30.5cm) double edge reversible cutting blades **2**
- Auto adjust cutters for trees and brush up to 6.25" (15.9cm) in diameter
- Extended 48" (121.9cm) axle with D.O.T. approved 4.80-8 Ø15" (Ø41.9cm) OD rear tires on Ø9" (Ø22.9cm) rims and off-road 4.10-4 Ø10" (Ø25.4cm) OD front tires on Ø5" (Ø12.7cm) rims **3**
- Includes safety glasses, ear protection, work gloves and assembly tools
- Electric start (battery included) **4**
- CE safety approved shutoff
- Dual tool free swing open chutes
- Tool-free 180° rotational spout on 59" (149.9cm) truck bed height expulsion chute
- Extra-large feed chute with integrated equipment moving handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



12-INCH STUMP GRINDER

ITEM NUMBERS

OPG777

27

UPC

826518005524

DESCRIPTION

Introducing the OPG777 12-inch stump grinder powered by a KOHLER® Command PRO® CH440 14HP 429cc engine and mounted on a heavy-duty welded 2-inch solid steel frame structurally engineered for endurance performance with a heavy-duty 2-inch axle and dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain. The direct drive delivers 3600RPM and 22.7 ft/lb of gross torque to a 12-inch solid steel cutting wheel mounted on premium pillar bearings. This machine demolishes stumps with a total of 9 carbide teeth cutting 3-1/2 inches wide per cut and cuts any diameter stump 12-inches above and 9-inches below ground. Additional features include key shut-off, locking throttle, drop stand, and solid bar lift handles.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Dual-belt direct drive 22.7ft/lb (30.7Nm) gross torque
WHEELS & TIRES	ATV-locking 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm)
WHEELBASE	32" (81.3cm)
TEETH	9 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 12" (30.5cm) high
CUTTING WIDTH	3.5" (8.9cm)
COUPLER	2" (5.08cm)
DIMENSIONS	91" (L) x 32" (W) x 52" (H) 231.1cm (L) x 81.3cm (W) x 132.1cm (H)
WEIGHT	234lb (106.1kg)
SHIPPING DIMENSIONS	43" (L) x 23" (W) x 25" (H) 109.2cm (L) x 58.4cm (W) x 63.5cm (H)
SHIPPING WEIGHT	275lb (124.7kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Demolishes stumps with 9 carbide teeth cutting 3.5" (8.9cm) wide per cut. **2**
- Cuts any diameter stump 12" (30.5cm) above and 9" (22.9cm) below ground.
- Extreme duty 2" (5.08cm) x 2" (5.08cm) axle with dual locking hitch pins for trouble-free wheel brakes and transport over rough terrain
- 145/70-6 Ø13.75" (Ø34.9cm) OD x 5.25" (13.3cm) tires on ATV-locking wheels **3**
- Key shut-off
- Locking throttle
- Drop stand and removable tow bar **4**
- Solid bar lift handles
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



14-INCH ELECTRIC START STUMP GRINDER

28



ITEM NUMBER

OPG888E

UPC

827518006719

DESCRIPTION

Introducing the OPG888E, powered by a KOHLER® Command PRO® CH440 14HP 429cc engine with electric start, and is capable of demolishing stumps 14 inches above ground and 10 inches below ground with its dual V-belt direct drive 22.7ft/lb gross torque and 12 FC11C carbide cast mounted teeth that cut 4 inches wide. This machine features a heavy-duty frame, 145/70-6 ATV tires, a removable flip tow bar for easy trolley or off-road towing up to 15mph (24km/h), an operator controlled posi-lock wheel brake for pivot grinding, and a bow handle with CE safety approved hands-off shut down.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH440 14HP 429cc
GEARBOX	Dual V-belt direct drive 22.7ft/lb (30.7Nm) gross torque
WHEELS & TIRES	ATV 145/70-6 Ø13.75" (Ø35cm) x 5.25" (13.3cm)
WHEELBASE	32" (81.3cm)
TEETH	12 x FC11C carbide cast mounted
STUMP CAPACITY	Any diameter, 14" (35.6cm) high
CUTTING WIDTH	4" (10.2cm)
BATTERY	12V 14Ah
COUPLER	2" (5.08cm)
DIMENSIONS	102" (L) x 48" (W) x 59" (H) 259.1cm (L) x 121.9cm (W) x 149.9cm (H)
WEIGHT	285lb (129.3kg)
SHIPPING DIMENSIONS	42" (L) x 31" (W) x 26" (H) 106.7cm (L) x 78.7cm (W) x 66cm (H)
SHIPPING WEIGHT	308lb (139.7kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH440 14HP 429cc engine **1**
- Performs 4" (10.2cm) wide cuts with 12 FC11C carbide cast mounted teeth **2**
- Heavy-duty steel frame
- ATV 145/70-6 Ø13.75" (Ø35cm) x 5.25" (13.3cm) tires on a 32" (81.3cm) wheelbase **3**
- Removable flip tow bar with a 2" (5.08cm) hitch receiver **4**
- Operator controlled Posi-lock wheel brake for pivot grinding
- Bow handle with CE safety approved hands-off shut-down **5**
- Demolishes any diameter stump up to 14" (35.6cm) above and 10" (25.4cm) below ground
- 12V 14Ah battery included for electric start capability
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



18-INCH TRENCHER

ITEM NUMBERS

OPT118

29

UPC

826518005586

DESCRIPTION

The OPT118 is powered by a KOHLER® Command PRO® CH270 7HP 208cc engine equipped with a direct drive chain trencher that travels at 180ft/min to create 18-inch deep by 4-inch wide channels using its 3/8-inch plow plates and 21 quick-change carbide alloy high-pressure tri-cut teeth that run at 400RPM, and to ensure a cleaner operation, the OPT118 is equipped with a 6-inch side off-loading auger that removes dirt from the channel.

This machine also features a heavy-duty steel construction, adjustable handle with a release and stop safety hand grip, and 15-inch 6.00-6 wheels with auto-lock in reverse capability.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
GEARBOX	Direct chain drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	6.00-6 Ø15" (Ø38.1cm) OD auto-lock in reverse
CHAIN SPEED	180ft/min (54.9 m/min)
CHAIN DIMENSION	63" (160cm)
TRENCH SIZE	4" (W) x 18" (D) 10.2cm (W) x 45.7cm (D)
TEETH	21 x carbide alloy high-pressure
AUGER	6" (15.2cm) side off-load
DIMENSIONS	95" (L) x 47" (W) x 59" (H) 241.3cm (L) x 119.4cm (W) x 149.9cm (H)
WEIGHT	335lb (152kg)
SHIPPING DIMENSIONS	41" (L) x 30" (W) x 33" (H) 104.1cm (L) x 76.2cm (W) x 83.8cm (H)
SHIPPING WEIGHT	362lb (164.2kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH270 7HP 208cc engine ¹
- Direct chain drive trencher chain and auger
- 5 depth positions
- Auto-locking in reverse 6.00-6 Ø15" (Ø38.1cm) OD tires and wheels for digging in reverse ²
- 3/8" (0.95cm) plow plates with 21 carbide alloy high-pressure quick change teeth ³
- Adjustable handle with release and stop safety hand grip ⁴
- 6" (15.2cm) direct drive auger
- Heavy gauge steel construction
- Direct drive with 400RPM tri-cut teeth chain drive at 180ft/min (54.9m/min) dig rate
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



27-TON HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

30



ITEM NUMBER

OPS227

UPC

827518008577

DESCRIPTION

Introducing the 27-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS227 is driven by a powerful KOHLER® SH265 6.5HP 196cc engine. This machine is capable of splitting up to 25.5 inches in length and 19.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8-inch heat-treated steel wedge. The OPS227 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5HP 196cc
SPLITTING CAPACITY	25.5" (L) x Ø19.6" 64.7cm (L) x Ø54.8cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4" (Ø10.2cm) x 24" (60.9cm) stroke
HYDRAULIC FLOW RATE	15GPM (56.8LPM), two-stage
HYDRAULIC OIL CAPACITY	6.5gal (24.6L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8" (20.3cm) high, heat-treated steel
BEAM	8" (20.3cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6cm) OD
WHEELBASE	37" (94cm)
COUPLER	2" (5.08cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	87.4" (L) x 49.2" (W) x 35.8" (H) @ 507lb 222cm (L) x 125cm (W) x 91cm (H) @ 230kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 551.2lb 180cm (L) x 80cm (W) x 50cm (H) @ 250kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5HP 196cc engine **1**
- 25.5" x Ø19.6" (64.8cm x Ø49.8cm) log capacity
- 8" (20.3cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6cm) OD road tires sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15GPM (56.8LPM) pump
- 6.5 gallon (24.6 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



32-TON HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS232

31

UPC

827518008584

DESCRIPTION

Introducing the 32-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS232 is driven by a powerful KOHLER® SH265 6.5HP 196cc engine. This machine is capable of splitting up to 25.5 inches in length and 21.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8.5-inch heat-treated steel wedge. The OPS232 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5HP 196cc
SPLITTING CAPACITY	25.5" (L) x Ø21.6" 64.7cm (L) x Ø54.8cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4.5" (Ø11.4cm) x 24" (60.9cm) stroke
HYDRAULIC FLOW RATE	15GPM (56.8LPM), two-stage
HYDRAULIC OIL CAPACITY	8.5gal (32L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8.5" (21.6cm) high, heat-treated steel
BEAM	8.5" (21.6cm) foot plate
VALVE	Auto-retract with adjustable detent
WHEELS & TIRES	D.O.T. approved 4.80-8 Ø16" (Ø40.6cm) OD
WHEELBASE	37" (94cm)
COUPLER	2" (5.08cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	89.4" (L) x 51.2" (W) x 37.4" (H) @ 529.1lb 227cm (L) x 130cm (W) x 95cm (H) @ 240kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 573lb 180cm (L) x 80cm (W) x 50cm (H) @ 260kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5HP 196cc engine **1**
- 25.5" x Ø21.6" (64.8cm x Ø54.8cm) log capacity
- 8.5" (21.6cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved Ø16" (Ø40.6cm) OD road tires sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15GPM (56.8LPM) pump
- 8.5 gallon (32 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty
- **NOT HIGHWAY TOWABLE AND MAX SPEED 25MPH (40KM/H)**



40-TON KINETIC HORIZONTAL LOG SPLITTER

ITEM NUMBERS

OPS240

UPC

826518005746

FEATURES

- Powered by a KOHLER® Command PRO® Commercial CH270 7HP 208cc engine **1**
- 8" (20.32cm) solid steel expansion wedge **2**
- Oversized steel worktable with quad-log slides **3**
- H-beam height sits at 25" (63.5cm)
- Heat-treated ram with bearing glide force and auto-retraction
- Extended stability stand
- ATV-locking wheels **4**
- Fits on a 2" (5.08cm) hitch receiver for easy towing
- Quick-release clam shell body for easy access to interior of the unit **5**
- Safety lock out
- Super-quick 1 second cycling time
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

DESCRIPTION

Introducing the DK2 POWER OPS240 40-ton kinetic log splitter, powered by a KOHLER® CH270 7HP 208cc Command PRO® engine for outstanding performance. Equipped with an oversized reinforced steel work table, safety lockout and a clam shell quick-access body for easy use and maintenance.

The OPS240 has an 8-inch expansion wedge and an auto-retracting bearing-guided ram to drive through logs up to 22 inches in diameter and up to 22 inches in length. Keep yourself safe while working with its extended stability stand and ATV locking wheels, keeping the splitter securely in place.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
GEARBOX	Direct drive 10.7ft/lb (14.5Nm) gross torque
WHEELS & TIRES	ATV-locking
SPLITTING CAPACITY	Ø22" x 22" (L) Ø55.9cm x 55.9cm (L)
WEDGE	8" (20.32cm), steel
H-BEAM	25" (63.5cm) ground clearance
CYCLE TIME	1 second
COUPLER	2" (5.08cm)
DIMENSIONS	120" (L) x 37" (W) x 44" (H) 304.8cm (L) x 94cm (W) x 111.8cm (H)
WEIGHT	616lb (279.4kg)
SHIPPING DIMENSIONS	71" (L) x 27" (W) x 26" (H) 180.3cm (L) x 68.6cm (W) x 66cm (H)
SHIPPING WEIGHT	690lb (313kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



17-INCH x 21-INCH PLATE COMPACTOR

ITEM NUMBER

OPV425

33

UPC

827518008249

DESCRIPTION

Featuring a large 17-inch by 21-inch base plate, the OPV425 plate compactor doesn't disappoint when it comes to compacting performance, and the power that drives this machine comes from a KOHLER® Command PRO® CH270 7HP 208cc engine.

With a compacting force of 3,600lb (16kn) at 4,750 vibrations per minute, this unit is the perfect solution for your compacting needs.

Designed with conveniently placed, 27.5-inch folding handles for easy transportation and storage, open design to reduce dirt build-up, and a central-mounted, fully enclosed exciter for even compacting force over the entire base plate.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
BASE PLATE	17" (43.2cm) x 21" (53.3cm)
HANDLE LENGTH	27.5" (69.9cm)
VIBRATION FREQUENCY	4,750VPM
CENTRIFUGAL FORCE	3,600lb/ft (16kn)
COMPACTING DEPTH	11.8" (30cm)
SPEED	12.6in/sec (32cm/sec)
DIMENSIONS	17" (L) x 21" (W) x 29" (H) 43.2cm (L) x 53.3cm (W) x 73.7cm (H)
WEIGHT	198.4lb (90kg)
SHIPPING DIMENSIONS	18.9" (L) x 26.4" (W) x 28.3" (H) 48cm (L) x 67.1cm (W) x 72cm (H)
SHIPPING WEIGHT	227lb (103kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® CH270 7HP 208cc Command PRO® Commercial Engine **1**
- 17" (43.2cm) x 21" (53.3cm) solid steel base plate
- Conveniently placed 27.5" (69.9cm) folding handles for easier transportation and stowaway **2**
- Open design to reduce dirt and residue build-up **3**
- Central-mounted, fully enclosed exciter for even compacting force over the entire base plate **4**
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty



1100LB 48V ELECTRIC HYDRAULIC DUMP CART

34



ITEM NUMBER

OPD811

UPC

826518005722

DESCRIPTION

With a wet bucket for sand, gravel, concrete and more, the DK2 POWER OPD811 self-drive electric powered hydraulic dump cart runs for up to 6 hours on one charge with its 48V 20Ah battery and moves it all. Equipped with a hydraulic electric lift, this unit is capable of tipping its wet bucket 90 degrees vertically for easy unloading.

The OPD811 comes with throttle bar speed control and articulated floating rear wheels to keep your load level and steady. Moving around the job site is effortless with forward and reverse speeds of 6 MPH and dual front wheel drive to climb over rough terrain.

SPECIFICATION

BATTERY	48V 20Ah (4 x 12V series)
PAYLOAD CAPACITY	1,100lb (499kg)
DRIVE WHEELS & TIRES	All-terrain 4.00-8 Ø16" (Ø40.6cm) OD
REAR WHEELS & TIRES	Off-road 4.10-4 Ø10" (Ø25.4cm) OD on Ø5" (Ø12.7cm) rims
MAX SPEED	6mph (9.7km/h)
RUN TIME	6hrs
CHARGE TIME	5hrs
BUCKET	8ft ³ (0.23m ³), 45gal (170.3L), sealed steel
COUPLER	2" (5.08cm)
DIMENSIONS	60" (L) x 40" (W) x 40" (H) 152.4cm (L) x 101.6cm (W) x 101.6cm (H)
WEIGHT	572lb (259kg)
SHIPPING DIMENSIONS	54" (L) x 34" (W) x 32" (H) 137.2cm (L) x 86.4cm (W) x 81.3cm (H)
SHIPPING WEIGHT	616lb (279.4kg)
WARRANTY	1-year limited



FEATURES

- Powered by a 48V 20Ah battery **1**
- 8ft³ (0.23m³) 45gal (170.3L) sealed steel wet bucket **2**
- All-terrain 4.00-8 Ø16" (Ø40.6cm) OD front wheel drive tires, with electric drive up to 6mph (9.7km/h) and off-road 4.10-4 Ø10" (Ø25.4cm) OD rear tires on Ø5" (Ø12.7cm) rims to move effortlessly around job sites **3**
- Hydraulic electric lift cylinder to tip bucket to 90° vertical for easy unloading **4**
- Throttle bar speed control with articulated floating rear wheels keep your load level and steady
- Improved "magic brake" system to brake upon the release of the brake handle, making your hauls safe and secure **5**

TWIN CYLINDER 1HP 2-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC02G

UPC

827518008249

FEATURES

- Powered by a twin cylinder 1HP (750W) 120V brushless electric motor **1**
- Holds up to 2gal (7.6L) of compressed air at 125 PSI (8.6 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports **2**
- 2 clear analog pressure gauges **3**
- Regulator dial to control the amount of air pressure released at the hose outlets **4**
- Compact, lightweight design with ergonomic handle for easy mobility **5**
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

DESCRIPTION

The AC02G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 125 PSI with 2 gallons of available compressed air, all at a whisper quiet sound level.

This unit comes equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools are given the air pressure they need to operate at their full potential, and when it comes to moving the AC02G around the job site, it couldn't be any easier with its lightweight, compact design and ergonomic lift handle.

When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER	550W/0.75HP / 750W/1.0HP
VOLTAGE	110V / 120V
FREQUENCY	60Hz
SPEED	1,700RPM
DISPLACEMENT	3.8CFM / 4.0CFM
CAPACITY	2gal (7.6L)
MAX PRESSURE	125 PSI (8.6 Bar)
DIMENSIONS	17.3" (L) x 15.8" (W) x 13.9" (H) 44cm (L) x 40.1cm (W) x 35.3cm (H)
WEIGHT	43lb (19.5kg)
SHIPPING DIMENSIONS	18.9" (L) x 16.9" (W) x 15.6" (H) 48cm (L) x 43cm (W) x 39.5cm (H)
SHIPPING WEIGHT	46.3lb (21kg)
WARRANTY	1-year limited



TWIN CYLINDER 1HP 4-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC04G

37

UPC

827518008799

DESCRIPTION


The AC04G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 125 PSI with 4 gallons of available compressed air, all at a whisper quiet sound level.

This unit comes equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools are given the air pressure they need to operate at their full potential, and when it comes to moving the AC04G around the job site, it couldn't be any easier with its lightweight, compact design and ergonomic lift handle.

When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER	550W/0.75HP / 750W/1.0HP
VOLTAGE	110V / 120V
FREQUENCY	60Hz
SPEED	1,700RPM
DISPLACEMENT	3.8CFM / 4.0CFM
CAPACITY	4gal (15.1L)
MAX PRESSURE	125 PSI (8.6 Bar)
DIMENSIONS	17.4" (L) x 15.6" (W) x 20.8" (H) 44.2cm (L) x 39.6cm (W) x 52.8cm (H)
WEIGHT	54lb (24.5kg)
SHIPPING DIMENSIONS	18.7" (L) x 16.5" (W) x 22.4" (H) 47.5cm (L) x 41.9cm (W) x 56.9cm (H)
SHIPPING WEIGHT	57.3lb (26kg)
WARRANTY	1-year limited



FEATURES

- Powered by a twin cylinder 1HP (750W) 120V brushless electric motor ¹
- Holds up to 4gal (15.1L) of compressed air at 125 PSI (8.6 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Compact, lightweight design with ergonomic handle for easy mobility ⁵
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

TWIN CYLINDER 2HP 10-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC10G

UPC

827518008775

FEATURES

- Powered by a twin cylinder 2HP (1491.4W) 120V AC brushless electric motor ¹
- Holds up to 10gal (37.9L) of compressed air at 150 PSI (10.3 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Ergonomic handle ⁵
- Never flat Ø8" (Ø20.3cm) OD x 1.75" (4.4cm) tires for easy mobility ⁶
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

DESCRIPTION

The AC10G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 150 PSI with 10 gallons of available compressed air, all at a whisper quiet sound level. Equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools operate at full potential, and when it comes to moving the AC10G around the job site, it couldn't be any easier with its ergonomic lift handle and never flat wheels and tires. When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.



SPECIFICATION

POWER	1491.4W / 2HP
VOLTAGE	120V AC
FREQUENCY	60Hz
SPEED	1,700RPM
DISPLACEMENT	4.5CFM (90 PSI / 6.2 Bar) 5.5CFM (40 PSI / 2.8 Bar)
TANK	Vertical
CAPACITY	10gal (37.9L)
MAX PRESSURE	150 PSI (10.3 Bar)
DIMENSIONS	19.5" (L) x 16" (W) x 32.5" (H) 49.5cm (L) x 40.6cm (W) x 82.6cm (H)
WEIGHT	88.2lb (40kg)
SHIPPING DIMENSIONS	20" (L) x 19" (W) x 36.3" (H) 50.8cm (L) x 48.3cm (W) x 92.2cm (H)
SHIPPING WEIGHT	97lb (44kg)
WARRANTY	1-year limited

TWIN CYLINDER 2HP 20-GALLON OIL-FREE SILENT ELECTRIC AIR COMPRESSOR

ITEM NUMBER

AC20G

39

UPC

827518008782

DESCRIPTION

The AC20G is a silent electric oil-free air compressor that can be plugged into any nominal 120V outlet and ready in seconds at 150 PSI with 20 gallons of available compressed air, all at a whisper quiet sound level. Equipped with a brushless electric motor, 2 quick-connect hose ports with a regulator dial so the tools operate at full potential, and when it comes to moving the AC20G around the job site, it couldn't be any easier with its ergonomic lift handle and never flat wheels and tires. When the job is done and it's time to pack up, just turn the pressure switch off, unplug, and pull the release valve to remove any remaining air pressure.

SPECIFICATION

POWER	1491.4W / 2HP
VOLTAGE	120V AC
FREQUENCY	60Hz
SPEED	1,700RPM
DISPLACEMENT	4.5CFM (90 PSI / 6.2 Bar) 5.5CFM (40 PSI / 2.8 Bar)
TANK	Vertical ASME Certified
CAPACITY	20gal (75.7L)
MAX PRESSURE	150 PSI (10.3 Bar)
DIMENSIONS	19.5" (L) x 16" (W) x 44.5" (H) 49.5cm (L) x 40.6cm (W) x 113cm (H)
WEIGHT	106.9lb (48.5kg)
SHIPPING DIMENSIONS	20" (L) x 18.3" (W) x 47.3" (H) 50.8cm (L) x 46.5cm (W) x 120.1cm (H)
SHIPPING WEIGHT	116.8lb (53kg)
WARRANTY	1-year limited



FEATURES

- Powered by a twin cylinder 2HP (1491.4W) 120V AC brushless electric motor ¹
- Holds up to 20gal (75.7L) of compressed air at 150 PSI (10.3 Bar)
- Whisper quiet operation
- Durable, spring-loaded pressure switch for easy on/off control
- 2 quick-connect hose ports ²
- 2 clear analog pressure gauges ³
- Regulator dial to control the amount of air pressure released at the hose outlets ⁴
- Ergonomic handle ⁵
- Ø8" (Ø20.3cm) OD x 1.75" (4.4cm) tires for easy mobility ⁶
- Release valve to remove air pressure from the tank
- Drain petcock drains moisture from the tank and reduce risk of corrosion
- Oil-free operation - no lubrication required
- Thermal overload protection system automatically shuts off the electric motor if it becomes overheated
- Includes 1-year limited DK2 warranty

4FT x 6FT SINGLE AXLE LANDSCAPE TRAILER

48



ITEM NUMBER

MMT4X6

UPC

826518004831

DESCRIPTION

The MMT4X6 is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295lb (587.4kg)
GVWR	1,600lb (725.7kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tire on 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Solid steel
GATE	36" (91.4cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9cm (L) x 121.9cm (W)
FLOOR HEIGHT	18" (45.7cm)
HITCH HEIGHT	14" (35.6cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1cm (L) x 162.6cm (W) x 66cm (H)
WEIGHT	302lb (137kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1cm (L) x 132.1cm (W) x 22.9cm (H)
SHIPPING WEIGHT	305lb (138.3kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel **1**
- Corrugated steel floor panel **2**
- 36" (91.4cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

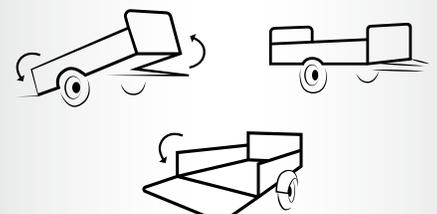

4FT x 6FT SINGLE AXLE OPEN RAIL LANDSCAPE TRAILER

ITEM NUMBER

MMT4X60

49

UPC

826518005623



DESCRIPTION

The MMT4X60 is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295lb (587.4kg)
GVWR	1,600lb (725.7kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tire on 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	36" (91.4cm) square tube steel ramp and round tube steel exterior
RAILS	Open design, tubular steel
GATE	36" (91.4cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9cm (L) x 121.9cm (W)
FLOOR HEIGHT	18" (45.7cm)
HITCH HEIGHT	14" (35.6cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1cm (L) x 162.6cm (W) x 66cm (H)
WEIGHT	302lb (137kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1cm (L) x 132.1cm (W) x 22.9cm (H)
SHIPPING WEIGHT	305lb (138.3kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Tubular steel open rail design **1**
- Corrugated steel floor panel **2**
- 36" (91.4cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

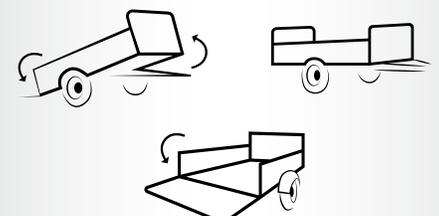

4FT x 6FT SINGLE AXLE OPEN RAIL GALVANIZED LANDSCAPE TRAILER

50



ITEM NUMBER

MMT4X6OG

UPC

827518008119

DESCRIPTION

The MMT4X6OG is specially designed for handling a variety of hauling tasks; the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, lawn tractor, or ATV and engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Made from 100% welded hot-dipped galvanized tubular steel with expanded steel decks and DK2's back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp.

SPECIFICATION


PAYLOAD CAPACITY	1,295lb (587.4kg)
GVWR	1,600lb (725.7kg)
WHEELS & TIRES	D.O.T. 4.80-12 bias tire on 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
RAILS	Open design, tubular steel
GATE	36" (91.4cm) square tube steel ramp and round tube steel exterior
FLOORING	Corrugated panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	72" (L) x 48" (W) 182.9cm (L) x 121.9cm (W)
FLOOR HEIGHT	18" (45.7cm)
HITCH HEIGHT	14" (35.6cm)
DIMENSIONS	152" (L) x 64" (W) x 26" (H) 386.1cm (L) x 162.6cm (W) x 66cm (H)
WEIGHT	302lb (137kg)
SHIPPING DIMENSIONS	78" (L) x 52" (W) x 9" (H) 198.1cm (L) x 132.1cm (W) x 22.9cm (H)
SHIPPING WEIGHT	305lb (138.3kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Tubular steel open rail design **1**
- Corrugated steel floor panel **2**
- 36" (91.4cm) square tube steel ramp and round tube steel exterior **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 4.80-12 bias tires on a 12" (30.5cm) rim with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler
- Includes all necessary paperwork for registration

3-IN-1 UTILITY TRAILER

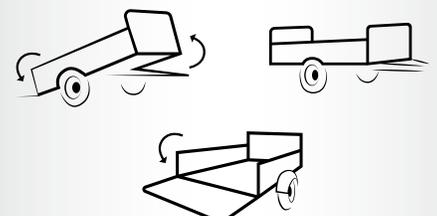

4FT x 8FT SINGLE AXLE FOLDING UTILITY TRAILER

ITEM NUMBER

MFT4X8

51

UPC

827518007150



DESCRIPTION

The trailer you've always needed has arrived with the DK2 MFT4X8 folding trailer kit. High-performing, durable and versatile, this trailer is ready for work. Built with a patented welded steel frame and deck for added strength and easy assembly, you'll spend less time reading manuals and more time on the road. The DK2 MFT4X8 is coated with high-performance anti-slip textured UV powder, all while maintaining its complete folding functionality. When it comes to trailers – there's truly nothing like it.

SPECIFICATION


PAYLOAD CAPACITY	1,450lb (657.7kg)
GVWR	1,720lb (780.2kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply tire, 80 PSI (5.5 Bar) cold
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
RAILS	Open design, tubular steel (sold separately)
FLOORING	Solid steel, anti-slip textured UV powder coated steel
LIGHTING	Pre-wired, Quick-connect D.O.T LED with flat 4-wire harness and connector
BED DIMENSIONS	96" (L) x 48" (W) 243.8cm (L) x 121.9cm (W)
DIMENSIONS	135" (L) x 62.3" (W) x 20" (H) 342.9cm (L) x 158.2cm (W) x 50.8cm (H)
WEIGHT	262lb (118.8kg)
SHIPPING DIMENSIONS	48.4" (L) x 62.2" (W) x 7.9" (H) 122.9cm (L) x 158cm (W) x 20.1cm (H)
SHIPPING WEIGHT	300lb (136.1kg)
WARRANTY	1-year limited



FEATURES

- Folding design to fit into compact spaces vertically **1**
- Constructed with fully welded heavy-duty UV powder coated tubular steel
- Solid steel bed with high-performance anti-slip textured UV powder coating **2**
- 5.30-12 6-ply tires **3**
- Trolley wheels for easy stowaway transport while folded **4**
- Pre-wired quick-connect D.O.T. LED lighting with flat 4-wire harness and connector
- 2" (5.08cm) coupler with safety chain and S-hook
- 8 stake holes for the MFT4X8RK fully welded UV powder coated tubular steel open rail kit **(sold separately)** **5**
- Includes all necessary paperwork for registration

FOLDING DESIGN

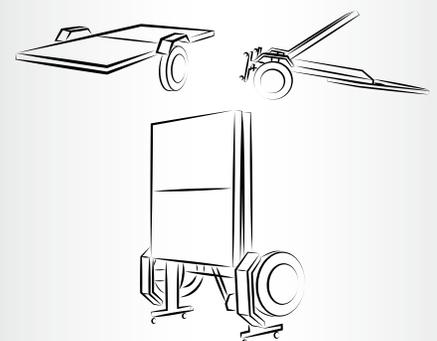

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER

ITEM NUMBER

MMT5X7

UPC

826518003391

FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 24" (61cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3ft (3.4m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 radial tires with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

DESCRIPTION


This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION

PAYLOAD CAPACITY	1,639lb (743.4kg)
GVWR	2,090lb (948kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply radial tire with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5cm (L) x 132.1cm (W)
FLOOR HEIGHT	20" (50.8cm)
HITCH HEIGHT	16" (40.6cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6cm (L) x 165.1cm (W) x 91.4cm (H)
WEIGHT	451lb (204.6kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5cm (L) x 139.7cm (W) x 22.9cm (H)
SHIPPING WEIGHT	460lb (208.7kg)
WARRANTY	1-year limited



5-IN-1 UTILITY TRAILER

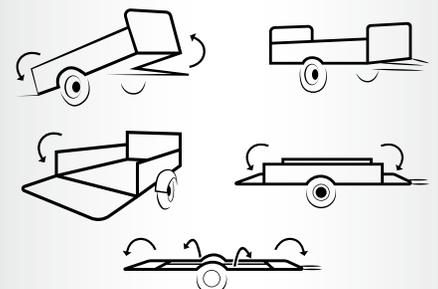

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY TRAILER WITH DRIVE-UP GATE

ITEM NUMBER

MMT5X7-DUG

53

UPC

826518005296



DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. The MMT5X7-DUG comes with a 24-inch front load-bearing gate and a 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639lb (743.4kg)
GVWR	2,090lb (948kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply radial tire with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6cm) expanded mesh and tubular steel rear ramp gate and 24" (61cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5cm (L) x 132.1cm (W)
FLOOR HEIGHT	20" (50.8cm)
HITCH HEIGHT	16" (40.6cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6cm (L) x 165.1cm (W) x 91.4cm (H)
WEIGHT	451lb (204.6kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5cm (L) x 139.7cm (W) x 22.9cm (H)
SHIPPING WEIGHT	460lb (208.7kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 40" (101.6cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 radial tires with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

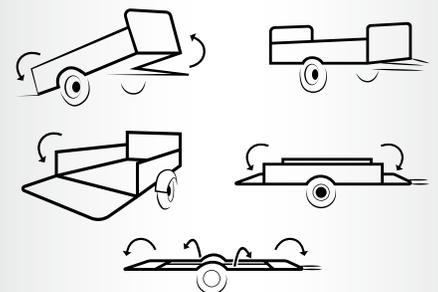

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER

54



ITEM NUMBER

MMT5X7G

UPC

826518003391

DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. When the front and back load-bearing gates are down, the trailer bed extends to nearly 12 feet in length, and the tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639lb (743.4kg)
GVWR	2,090lb (948kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply radial tire with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Corrugated reinforced steel
DROP GATES	24" (61cm) load-bearing corrugated reinforced steel
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5cm (L) x 132.1cm (W)
FLOOR HEIGHT	20" (50.8cm)
HITCH HEIGHT	16" (40.6cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6cm (L) x 165.1cm (W) x 91.4cm (H)
WEIGHT	451lb (204.6kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5cm (L) x 139.7cm (W) x 22.9cm (H)
SHIPPING WEIGHT	460lb (208.7kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 24" (61cm) load-bearing corrugated steel drop gates, extending the length of the trailer to 11.3ft (3.4m) **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 radial tires with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

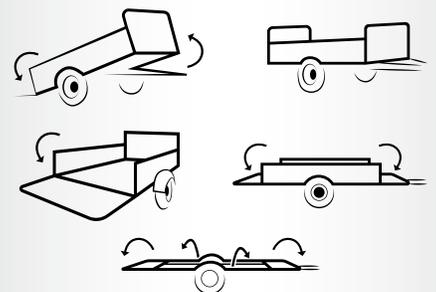

4.5FT x 7.5FT SINGLE AXLE MULTI-UTILITY GALVANIZED TRAILER WITH DRIVE-UP GATE

ITEM NUMBER

MMT5X7G-DUG

55

UPC

826518005302



DESCRIPTION

This single axle multi-utility trailer from DK2 is one of the most versatile trailers on the market. Sitting on a solid square tube cambered axle with 12-inch, 6-ply bias tires and a load capacity of 1,639 pounds. Equipped with a 24-inch front load-bearing gate and a 40-inch rear drive-up gate, and a tilt/dump capability that makes it easy to load or unload heavy items. Fabricated from 100% hot-dipped galvanized steel, all of the components are reinforced, adjustable, removable and/or interchangeable.

SPECIFICATION


PAYLOAD CAPACITY	1,639lb (743.4kg)
GVWR	2,090lb (948kg)
WHEELS & TIRES	D.O.T. 5.30-12 6-ply radial tire with 5 x 4.5" (11.4cm) bolt pattern
MATERIAL	Fully welded heavy-duty hot-dipped galvanized tubular steel
SIDE PANELS	Corrugated reinforced steel
GATES	40" (101.6cm) expanded mesh and tubular steel rear ramp gate and 24" (61cm) load-bearing corrugated reinforced steel front gate
FLOORING	Corrugated reinforced steel panel
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	88" (L) x 52" (W) 223.5cm (L) x 132.1cm (W)
FLOOR HEIGHT	20" (50.8cm)
HITCH HEIGHT	16" (40.6cm)
DIMENSIONS	177" (L) x 65" (W) x 36" (H) 449.6cm (L) x 165.1cm (W) x 91.4cm (H)
WEIGHT	451lb (204.6kg)
SHIPPING DIMENSIONS	88" (L) x 55" (W) x 9" (H) 223.5cm (L) x 139.7cm (W) x 22.9cm (H)
SHIPPING WEIGHT	460lb (208.7kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty hot-dipped galvanized tubular steel
- Corrugated reinforced steel floor panel **1**
- Corrugated reinforced steel side panels **2**
- 40" (101.6cm) expanded mesh and tubular steel rear ramp gate **3**
- 24" (61cm) load-bearing corrugated steel front drop gate
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- D.O.T. 5.30-12 radial tires with 5 x 4.5" (11.4cm) bolt pattern **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

5-IN-1 UTILITY TRAILER

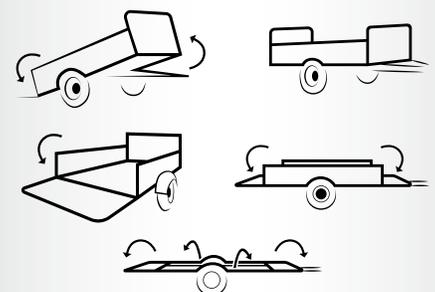

6FT x 10FT SINGLE AXLE OPEN RAIL UTILITY TRAILER

56



ITEM NUMBER

MMT6X10

UPC

826518005593

DESCRIPTION

Introducing the new MMT6X10 single axle open rail utility trailer, the largest in DK2's collection. Constructed with fully welded heavy-duty powder-coated tubular steel with a corrugated steel panel floor, you can count on this trailer to deliver long lasting reliability for all your hauling needs. It has a payload capacity of 1,950 pounds and sits on a solid square tube cambered axle equipped with D.O.T. 14-inch 175/80R14 tires. Load and unload this trailer with ease using the included 48-inch drive-up gate.

SPECIFICATION

PAYLOAD CAPACITY	1,950lb (884.5kg)
GVWR	2,500lb (1,134kg)
WHEELS & TIRES	14" (35.6cm) D.O.T. 175/80R14 radial tires
MATERIAL	Fully welded heavy-duty UV powder coated tubular steel
SIDE PANELS	Open design, tubular steel
GATE	49.3" (125.2cm) tubular and expanded mesh steel ramp
FLOORING	Corrugated reinforced steel panels
DUMP BED	2-position, axle-mounted with quick-release lock pin
LIGHTING	Pre-wired, quick-connect D.O.T LED
BED DIMENSIONS	120" (L) x 72" (W) 304.8cm (L) x 182.9cm (W)
FLOOR HEIGHT	20.2" (51.3cm)
HITCH HEIGHT	18.2" (46.2cm)
DIMENSIONS	166.1" (L) x 83.9" (W) x 71.1" (H) 421.9cm (L) x 213.1cm (W) x 180.6cm (H)
WEIGHT	640lb (290.3kg)
SHIPPING DIMENSIONS	83.1" (L) x 74" (W) x 10.2" (H) 211.1cm (L) x 188cm (W) x 25.9cm (H)
SHIPPING WEIGHT	650.4lb (295kg)
WARRANTY	1-year limited



FEATURES

- Constructed with fully welded heavy-duty UV powder-coated tubular steel
- Corrugated reinforced steel floor panel **1**
- Tubular steel open rail design **2**
- 49.3" (125.2cm) tubular and expanded mesh steel rear ramp gate **3**
- Solid square tube cambered axle
- 2-position axle-mounted dump bed with quick release lock pin **4**
- 14" (35.6cm) D.O.T. 175/80R14 radial tires **5**
- Heavy-duty tail light protectors
- Quick-connect D.O.T. LED lighting with side markers
- Ships in a single package
- 2" (5.08cm) coupler on an A-frame tongue for added stability
- Includes all necessary paperwork for registration

TRUNK MOUNTED ALUMINUM 3-BIKE CARRIER

ITEM NUMBER

BCR190

UPC

827518007129

60



DESCRIPTION

Just because you don't have a receiver hitch on your vehicle doesn't mean you can't take your bikes with you. The DK2 BCR190 can be strapped to the trunk of a car or small SUV using its heavy-duty durable nylon straps and haul up to 3 bikes without damaging the paint or body of the vehicle using the carrier's foam frame pads.

This bicycle carrier is adjustable for most makes and model of vehicles and easy to assemble. Soft rubber cradles and straps allow you to secure the bikes to the carrier without damaging the finish or performance of the bicycles, and the lightweight aluminum construction allows for easy installation or removal to/from the vehicle.

SPECIFICATION

PAYLOAD CAPACITY	70lb (31.8kg) (2 bikes) 81lb (36.7kg) (3 bikes)
MATERIAL	UV and temperature resistant lightweight aluminum
MOUNTING STRAPS	Heavy-duty durable nylon
CRADLES	Soft rubber
CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	Trunk-mounted
DIMENSIONS	29" (L) x 18" (W) x 29" (H) 73.7cm (L) x 45.7cm (W) x 73.7cm (H)
WEIGHT	8lb (3.6kg)
SHIPPING DIMENSIONS	19.5" (L) x 34" (W) x 6" (H) 48.3cm (L) x 86.4cm (W) x 15.2cm (H)
SHIPPING WEIGHT	11lb (5kg)
WARRANTY	1-year limited



FEATURES

- UV and extreme temperature resistant lightweight aluminum construction **1**
- Mounts to the trunk of most cars or small SUV's with heavy-duty durable nylon mounting straps **2**
- Carries up to three bicycles with 2 rubber cradles and adjustable straps per bicycle **3**
- Folding adjusters to fold the rack away when not in use **4**
- Foam frame pads to prevent vehicle scratching **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH MOUNTED 4-BIKE CARRIER

ITEM NUMBER

BCR290

61

UPC

827518007136



DESCRIPTION

The DK2 BCR290 hitch-mounted bike carrier is the perfect way to transport bikes for long road trips.

Quick and easy assembly takes only minutes and this carrier is constructed with UV power-coated steel to resist damage from harsh weather conditions.

Simply slide the bike carrier into your 2-inch receiver hitch and secure using the anti-wobble hitch pin. No-mark straps allow you to secure up to 4 bicycles to your carrier for transportation, and when out of use, the carrier tilts away for easy access to the rear of the mounted-vehicle.

SPECIFICATION

PAYLOAD CAPACITY	200lb (90.7kg) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
CRADLES	Soft rubber
CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	2" (5.08cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	35" (L) x 12" (W) x 35" (H) 88.9cm (L) x 30.5cm (W) x 88.9cm (H)
WEIGHT	20lb (9.1kg)
SHIPPING DIMENSIONS	22.5" (L) x 14" (W) x 3.75" (H) 57.2cm (L) x 35.6cm (W) x 9.5cm (H)
SHIPPING WEIGHT	23.2lb (10.5kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 2" (5.08cm) hitch receiver and carries up to 200lb (90.7kg) with a class III or IV receiver **2**
- Carries up to four bicycles with 2 rubber cradles **3** and adjustable straps **4** per bicycle
- Folding adjusters to fold the rack away when not in use for easy rear-vehicle access **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH-MOUNTED 2-BIKE PLATFORM CARRIER

ITEM NUMBER

BCR590

UPC

827518007112

62



DESCRIPTION


The DK2 BCR590 hitch-mounted platform bike carrier fits into either a 1.25-inch or 2-inch receiver hitch and allows for the easy transportation of two bicycles totalling up to 80 pounds by securing them to carrier.

The BCR590 adjusts in width and height to fit your bike while making sure the no-mark straps don't damage the finish of the mounted bike. This carrier folds up when not in use and the center arm folds down to allow access to the rear of the vehicle without removing the rack.

Lightweight and easy to assemble, the BCR590 is the perfect solution for those long road trips.

SPECIFICATION

PAYLOAD CAPACITY	80lb (36.3kg) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
FRAME CRADLES	Steel with no-mark padding and height adjustability
WHEEL CRADLES	Steel with length adjustability
WHEEL CRADLE STRAPS	Adjustable rubber
COMPATIBILITY	Mountain bikes and road bikes
MOUNT STYLE	1.25" (3.18cm) / 2" (5.08cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	53" (L) x 39" (W) x 20" (H) 134.6cm (L) x 99.1cm (W) x 50.8cm (H)
WEIGHT	28lb (12.7kg)
SHIPPING DIMENSIONS	40" (L) x 10.5" (W) x 5.5" (H) 101.6cm (L) x 26.7cm (W) x 14cm (H)
SHIPPING WEIGHT	30lb (13.6kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 1.25" (3.18cm) or 2" (5.08cm) hitch receiver and carries up to 80lb (36.3kg) with a class III or IV receiver **2**
- Carries up to two bicycles with 2 length-adjustable steel wheel cradles with adjustable rubber straps **3** and height-adjustable, no-mark frame cradles **4** per bicycle
- Folding adjusters to fold the rack away when not in use **5**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH-MOUNTED E-BIKE PLATFORM HAULER

ITEM NUMBER

BCR690E

63

UPC

827518008003




DESCRIPTION

Built to conveniently load two bikes of any size with its large wheel cradles, convenient rear wheel stubber straps, and padded universal frame cradles, you and a friend or family member can ride off-road, in the city, or wherever your journey takes you with the BCR690E E-bike hauler.

With effortless loading capabilities, a revolutionary pivot feature that gives you access to your tailgate or hatchback, and easy mounting with its 2-inch hitch compatibility, your only concern will be where to go next.

SPECIFICATION

PAYLOAD CAPACITY	72.3lb (32.8kg) (1 bike)
	144.6lb (65.6kg) (2 bikes) (Class III or IV receiver recommended)
MATERIAL	UV powder-coated steel
FRAME CRADLES	Steel with no-mark padding and height adjustability
FRONT WHEEL CRADLES	Large, heavy-duty poly
REAR WHEEL CRADLES	Length-adjustable, heavy-duty poly with adjustable rubber straps
COMPATIBILITY	E-bikes, fat tire bikes, mountain bikes, and road bikes
MOUNT STYLE	2" (5.08cm) hitch-mounted (Class III or IV receiver recommended)
DIMENSIONS	61.8" (L) x 43.3" (W) x 33" (H) 157cm (L) x 110cm (W) x 83.8cm (H)
WEIGHT	44lb (20kg)
SHIPPING DIMENSIONS	53.5" (L) x 12.2" (W) x 9.8" (H) 135.9cm (L) x 31cm (W) x 24.9cm (H)
SHIPPING WEIGHT	52lb (23.6kg)
WARRANTY	1-year limited



FEATURES

- Heavy-duty UV powder-coated steel construction **1**
- Mounts to any 2" (5.08cm) hitch receiver and carries up to 144.6lb (65.6kg) with a class III or IV receiver **2**
- Large, heavy-duty poly front wheel cradles **3**
- Height-adjustable, no-mark padded frame cradles **4**
- Length-adjustable, heavy-duty poly rear wheel cradles with adjustable rubber straps **5**
- Folding adjusters to fold the rack away when not in use **6**
- 1-year limited warranty
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



HITCH-MOUNTED STEEL CARGO CARRIER

ITEM NUMBER

HCC602

UPC

827518001165

64



DESCRIPTION

The DK2 hitch-mounted black powder coated steel cargo carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood.

This carrier has a 500 pound payload capacity (with a Class III or IV hitch receiver) and flips up against your vehicle when not in use.

FEATURES

- Heavy duty UV powder-coated tubular and expanded mesh steel construction
- Mounts to any 2" (5.08cm) hitch receiver **1**
- Flips up when not in use and stows against the rear of the vehicle **2**
- Carries up to 500lb (226.8kg) dependent on receiver strength (recommended Class III or IV)
- 3 rear reflective markers for additional road safety **3**
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**



SPECIFICATION

PAYLOAD CAPACITY	500lb (226.8kg) (with class III or IV hitch receiver)
MATERIAL	Heavy-duty UV powder-coated tubular and expanded mesh steel
MOUNT STYLE	Hitch-mounted
DIMENSIONS	60" (L) x 20" (W) x 6.5" (H) 152.4cm (L) x 50.8cm (W) x 16.5cm (H)
WEIGHT	47lb (21.3kg)
SHIPPING DIMENSIONS	33" (L) x 22" (W) x 10" (H) 83.8cm (L) x 55.9cm (W) x 25.4cm (H)
SHIPPING WEIGHT	51lb (23.1kg)
WARRANTY	Limited 1-year



HITCH-MOUNTED ALUMINUM CARGO CARRIER

ITEM NUMBER

HCC502A

65

UPC

826518005050



DESCRIPTION

The DK2 hitch-mounted aluminum cargo carrier allows you to immediately increase the cargo capacity of your vehicle so you can haul bulky, messy items like luggage, coolers or firewood.

This carrier has a 500 pound payload capacity (with a Class III or IV hitch receiver) and flips up against your vehicle when not in use.



FEATURES

- Durable and lightweight aluminum construction
- Mounts to any 2" (5.08cm) hitch receiver **1**
- Flips up when not in use and stows against the rear of the vehicle **2**
- Carries up to 500lb (226.8kg) dependent on receiver strength (recommended Class III or IV receiver)
- Includes threaded anti-wobble hitch pin for added stability
- 11 rear reflective markers for additional road safety **3**
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**

SPECIFICATION

PAYLOAD CAPACITY 500lb (226.8kg)
(with class III or IV hitch receiver)

MATERIAL Lightweight aluminum, formed steel hitch and hitch bracket, carbon steel hardware, thermoplastic end caps

MOUNT STYLE Hitch-mounted

DIMENSIONS 49.5" (L) x 22.25" (W) x 6.5" (H)
125.7cm (L) x 56.5cm (W) x 16.5cm (H)

WEIGHT 29lb (13.2kg)

SHIPPING DIMENSIONS 50" (L) x 24" (W) x 4" (H)
127cm (L) x 61cm (W) x 10.2cm (H)

SHIPPING WEIGHT 32lb (14.5kg)

WARRANTY Limited 1-year



HITCH-MOUNTED MOTORCYCLE CARRIER

ITEM NUMBER

TMC201

UPC

693495970561

66



DESCRIPTION

For someone who doesn't want the hassles associated with towing a trailer, the hitch-mounted motorcycle carrier is the perfect option for you.

Since this carrier utilizes our patent-pending WedgeLock™ mounting system, it is rock solid and will keep your bike stable and secure. Now you can transport your bike with confidence and ease. This carrier works equally great with motorcycles, motocross & dual purpose bikes, scooters and mopeds.

SPECIFICATION

CONSTRUCTION	UV-Powder Coated Steel
MOUNT STYLE	Hitch-Mounted
DIMENSIONS	55" x 21" x 7"
WEIGHT	86 lb
SHIPPING DIMENSIONS	56" x 21" x 7"
SHIPPING WEIGHT	89 lb

VEHICLE HITCH MANUFACTURER RATING	MAXIMUM CARRYING CAPACITY OF CARRIER
300 lb	180 lb
350 lb	225 lb
500 lb	350 lb
750 lb	500 lb

FEATURES

- Extremely versatile, secure and stable: patent-pending design results in a snug anti-wobble fit
- Tilts down for easy loading and unloading
- Easily installed and removed - no extra tools required
- Ideally suited for SUV, RV, or pickup trucks with cap
- Features adjustable front wheel channel to accommodate different sized bikes
- Retractable tie-down bar
- Safety chains and hitch pin included
- Fits any standard 2 inch class III or IV hitch receiver (weight capacity dependent on receiver strength)
- UV-Powder coated steel construction
- **DO NOT MOUNT TO RVs, TRAVEL TRAILERS, OR ANY MID-AXLE VEHICLES**





DESCRIPTION

Compact, general purpose 120V electric hoist is ideal for all manner of lifting applications.

Easy to install, with easy change cable design. It is supplied with special fixing clamps for simple section beam fitting (square section beams).

This hoist also has the facility to add a wireless remote control as an option.

DK2 WARRIOR HOISTS

ITEM NUMBER / UPC

EH250 / 827518007303

EH500 / 827518007310

SPECIFICATION

MODEL: EH250 (120V)

Max Load

Single Pull: 275 lb

Double Pull: 551 lb

Lift Speed p/min

Single Pull: 59 ft

Double Pull: 29 ft

Cable: 0.12" x 59 ft

Rating: IP54

MODEL: EH500 (120V)

Max Load

Single Pull: 551 lb

Double Pull: 1102 lb

Lift Speed p/min

Single Pull: 59 ft

Double Pull: 29 ft

Cable: 0.15" x 59 ft

Rating: IP54



DESCRIPTION

Ideal for large ATVs and small trailers. A huge high power motor, heavy duty clutch, heavy duty steel gearing and heavy duty waterproof contactors ensure the ultimate in performance and reliability. Strengthened Steel drum makes it ideal to use with Synthetic Rope. Watertight 4 Pin connection allows the use of 'Plug and Play' Wireless.

SPECIFICATION

C2500N		C3500N	
RATED LINE PULL	2,500 lb	RATED LINE PULL	3,500 lb
MOTOR: 12V	1.35 HP	MOTOR: 12V	1.95 HP
GEARING	170:1	GEARING	170:1
BRAKING ACTION	Dynamic	BRAKING ACTION	Dynamic
DRUM SIZE DIA x L	1.5" x 3.1"	DRUM SIZE DIA x L	1.5" x 3.1"
CABLE SIZE DIA x L	0.2" x 46 ft (WR) 0.2" x 46 ft (SR)	CABLE SIZE DIA x L	0.2" x 42 ft (WR) 0.2" x 46 ft (SR)
MOUNT PATTERN	3.1"	MOUNT PATTERN	3.1"
DIMENSIONS	13.2" x 4.6" x 6.5"	DIMENSIONS	13.7" x 4.6" x 6.5"



NINJA SERIES ATV WINCHES

71

ITEM NUMBER / UPC

C2500N / 826518004619
 C2500N-SR / 826518005234
 C3500N / 826518004626
 C3500N-SR / 826518005241

FEATURES

- Sealed high power motor
- Heavy duty watertight contactors
- Full steel planetary gearing
- Strengthened steel drum (suitable for synthetic rope)
- Watertight controller socket
- Gloss chip resistant paint

INCLUDES

- Steel cable
- Heavy duty roller fairlead
- Heavy duty battery leads
- 3 ton pulley block
- Mounting plate and hardware
- 1/4 hook

STEEL & SYNTHETIC VERSIONS AVAILABLE

DETAILK2.COM/WINCHES



72

DESCRIPTION

High quality three stage planetary gearing ensure this is one of the quietest and smoothest winches on the market. The silky smooth performance and the full load holding brake make it the perfect solution for high spec applications.

SPECIFICATION

C4500N		LINE PULL (LB)	LINE SPEED (FT / MIN)	AMP DRAW	
				12V	24V
RATED LINE PULL	4,500 lb	0	11.6	20	15
MOTOR: 12V	1.95 HP	1,500	9.2	70	40
GEARING	172:1	2,500	7.8	100	65
BRAKING ACTION	Auto in the Drum	3,500	6.6	140	80
DRUM SIZE DIA X L	1.7" x 3.8"	4,500	4.9	200	130
CABLE SIZE DIA X L	0.25" x 47.5 ft (WR) 0.24" x 49 ft (SR)	LAYER OF WIRE ROPE		LINE PULL (LB)	
		1		4,500	
MOUNT PATTERN	5" x 3.7"	2		3,642	
DIMENSIONS	14.4" x 4.9" x 6.4"	3		3,060	
WEIGHT	28.6 lb	4		2,638	



NINJA SERIES TRAILER WINCHES

ITEM NUMBER / UPC

C4500N / 826518005258
C4500N-SR / 826518005265

FEATURES

- Power in and power out
- High torque 1.95 HP motor
- Heavy duty waterproof contactors
- Full steel planetary gearing
- Mount plate as standard
- Full load holding break
- Can fit tow ball mount

INCLUDES

- 0.25" x 47.5 ft steel cable
- 3m remote handset
- Heavy duty roller fairlead
- Heavy duty battery leads
- Mounting plate
- 3/8 hook
- *ATV remote available

STEEL & SYNTHETIC VERSIONS AVAILABLE



DETAILK2.COM/WINCHES



TROJAN SERIES PORTABLE UTILITY WINCH

73



DESCRIPTION

The Trojan Portable Utility Winch is a complete winching solution in a convenient kit that features a 4,000 lb rated line pull winch on a unique powder coated winch platform, all in a compact, easy to carry composite tool box. The kit is easy to store, use, and repack. Completely portable, the Trojan requires no installation and does not require a winch mount; however, it can be permanently mounted on a trailer and be used as a utility winch if desired.

SPECIFICATION

RATED LINE PULL	4,000 lb	LINE PULL	LINE SPEED	AMP DRAW
		(LB)	(FT / MIN)	12V
MOTOR: 12V	1.4 hp	0	20	20
GEARING	166:1	4,000	5.5	220
CABLE SIZE DIA X L	0.2" x 42' (WR) 0.2" x 49' (SR)			
DIMENSIONS	19.9" x 12" x 7.6"			
WEIGHT	45.2 lb			



FEATURES

- 4,000 lb pulling power
- Synthetic or wire rope version available
- Built in 1/4 inch hardened steel plate
- Can be permanently mounted
- Quick plug and play functionality

INCLUDES

- 6,000 lb pulley block
- Quick connect cord with alligator clips
- Three 20,000 lb D-shackles
- 2 x 8 ft heavy duty straps rated 8,000 lb
- 12 ft hand held remote
- 10 ft quick connect power cord
- Heavy duty leather palmed winch gloves

STEEL & SYNTHETIC VERSIONS AVAILABLE



DETAILK2.COM/WINCHES



SPARTAN 6,000 LB ELECTRIC WINCH

ITEM NUMBER / UPC

6000 / 826518005173
6000-SR / 827518006764

DESCRIPTION

Warrior Winches are delighted to announce the arrival of the new member of Spartan Series, Tough, Strong and ready for Battle. The Spartan 6000 lb short drum model is ideal where space and payload are limited. The winch has a short drum and is less than 66Lbs, however the extended drum supports allow it to carrier up to 131ft of 0.28" cable. The Synthetic rope version comes fitted with 0.27" x 98ft.

We really believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

With great performance, outstanding features included as standard, & backed by the Warrior Winches un-rivalled limited Lifetime Warranty, this should make a Spartan the first choice for all serious enthusiasts.

FEATURES

- Weather sealed high performance motor
- Heavy duty 3 stage gearbox
- Heavy duty drum supports
- Full steel planetary gearing
- Full load holding brake
- Every winch is 100% load tested
- Chip resistant gloss paint finish

SPECIFICATION

RATED LINE PULL	6,000 lb	LINE PULL	LINE SPEED	AMP DRAW
		LB	FT / MIN	12V
MOTOR: 12V	4.5 hp	0	19.4	80
		2,000	13.1	140
GEARING	230:1	4,000	9.2	210
		6,000	7.2	285
DRUM SIZE DIA X L	2.48" x 4.2"	LAYER OF WIRE ROPE	LINE PULL (LB)	CABLE CAP (FT)
CABLE SIZE DIA X L	0.28" x 131 ft (WR) 0.28" x 98 ft (SR)	1	6,000	9.8
		2	4,979	22
DIMENSIONS	17.4" x 7.7" x 10.8"	3	4,255	36.1
		4	3,714	52.2
WEIGHT	66 lb	5	3,296	70.5
		6	2,962	90.9
		7	2,690	113.2
		8	2,463	131.2

INCLUDES

- 10 ft remote handset
- 5/16 hook
- Aluminum or roller fairlead (synthetic rope or steel cable)
- Heavy duty battery leads
- Stainless steel mounting hardware
- 0.27" x 98 ft synthetic rope or 0.28" x 131 ft steel cable



STEEL & SYNTHETIC VERSIONS AVAILABLE





DESCRIPTION

The Spartan Series: Tough, Strong and ready for a Battle, these Winches really will challenge all before them. We have reluctantly termed them as 'entry level', however this describes the price point, not the performance.

We believe these to be the best value for money Winches around, a lower price does not mean that we have had to compromise the core values integral to a good winch, such as reliability and durability.

SPECIFICATION

8000		9500	
RATED LINE PULL	8,000 lb	RATED LINE PULL	9,500 lb
MOTOR: 12V	4.6 hp	MOTOR: 12V	4.6 hp
GEARING	233:1	GEARING	230:1
BRAKING ACTION	Auto in the drum	BRAKING ACTION	Auto in the drum
DRUM SIZE DIA X L	2.5" x 8.8"	DRUM SIZE DIA X L	2.5" x 8.8"
CABLE SIZE DIA X L	0.3" x 85 ft (WR) 0.35" x 82 ft (SR)	CABLE SIZE DIA X L	0.36" x 82 ft (WR) 0.35" x 82 ft (SR)
MOUNT PATTERN	10" x 4.5"	MOUNT PATTERN	10" x 4.5"
DIMENSIONS	21.3" x 6.3" x 8.6"	DIMENSIONS	21.3" x 6.3" x 8.6"
12000			
RATED LINE PULL	12,000 lb		
MOTOR: 12V	6.0 hp		
GEARING	230:1		
BRAKING ACTION	Auto in the drum		
DRUM SIZE DIA X L	2.5" x 8.8"		
CABLE SIZE DIA X L	0.4" x 82 ft (WR) 0.43" x 82 ft (SR)		
MOUNT PATTERN	10" x 4.5"		
DIMENSIONS	22.8" x 6.3" x 8.6"		



SPARTAN SERIES ELECTRIC WINCH

75

ITEM NUMBER / UPC

8000 / 826518003148
 8000-SR / 826518005197
 9500 / 826518003155
 9500-SR / 826518005203
 12000 / 826518003162
 12000-SR / 826518005210

FEATURES

- Weather sealed high performance motor
- Heavy duty 3 stage gearbox
- Heavy duty drum supports
- Weather sealed solenoids
- Full steel planetary gearing
- Full load holding brake
- Every winch is 100% load tested
- Chip resistant gloss paint finish

INCLUDES

- Galvanized steel cable
- 10 ft remote handset
- Heavy duty steel roller fairlead
- Heavy duty battery leads
- Stainless steel mounting hardware
- Clevis hook



STEEL & SYNTHETIC VERSIONS AVAILABLE

DETAILK2.COM/WINCHES

76



DESCRIPTION

Superb high specification winch. Ideal for recovery and 4x4 applications. Outstanding features include high quality series wound double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, efficient full steel planetary gearing. Comes with stainless steel roller fairlead and fittings as standard. Complete with Heavy Duty integrated wireless remote. Available with Armortek Synthetic Rope and Aluminum Fairlead.

SPECIFICATION

S8000		S9500	
RATED LINE PULL	8,000 lb	RATED LINE PULL	9,500 lb
MOTOR: 12V	4.6 hp	MOTOR: 12V	4.6 hp
GEARING	210:1	GEARING	230:1
BRAKING ACTION	Auto in the drum	BRAKING ACTION	Auto in the drum
DRUM SIZE DIA X L	2.5" x 8.8"	DRUM SIZE DIA X L	2.5" x 8.8"
CABLE SIZE DIA X L	0.3" x 95 ft	CABLE SIZE DIA X L	0.4" x 85 ft
MOUNT PATTERN	10" x 4.5"	MOUNT PATTERN	10" x 4.5"
DIMENSIONS	21.3" x 6.3" x 8.6"	DIMENSIONS	21.3" x 6.3" x 8.6"
S12000			
RATED LINE PULL	12,000 lb		
MOTOR: 12V	6.5 hp		
GEARING	230:1		
BRAKING ACTION	Auto in the drum		
DRUM SIZE DIA X L	2.5" x 8.8"		
CABLE SIZE DIA X L	0.4" x 85 ft		
MOUNT PATTERN	10" x 4.5"		
DIMENSIONS	22.8" x 6.3" x 8.6"		



SAMURAI SERIES ELECTRIC WINCH

ITEM NUMBER / UPC

S8000 / 826518003247
 S8000-SR / 826518003179
 S9500 / 826518003254
 S9500-SR / 826518003186
 S12000 / 826518003261
 S12000-SR / 826518003193

FEATURES

- All brass (no corrosion) series wound motor
- Double sealed motor
- Sealed waterproof contactor
- Steel contactor cover
- Double sealed drum (gearbox/ motor)
- Sealed 3 stage planetary gears
- Stainless steel 4 way fairleads
- Integrated wireless remote

INCLUDES

- Galvanized steel cable
- 10 ft remote handset
- Heavy duty stainless steel fairlead
- Heavy duty battery leads
- Stainless steel mounting hardware
- Built-in wireless remote
- 5/16 hook



STEEL & SYNTHETIC VERSIONS AVAILABLE

DETAILK2.COM/WINCHES



SAMURAI 9,500 LB HIGH SPEED WINCH

77

ITEM NUMBER / UPC

S9500HS / 826518003278
S9500HS-SR / 826518003223

DESCRIPTION

The ultimate winch for Extreme Terrain. Fully Sealed with an unbeatable line Speed of 65 ft/min. Outstanding features includes Huge 6.5 hp high quality double sealed motor with brass fittings, heavy duty waterproof contactors, double sealed drum on maintenance free bearings, quiet, fully sealed efficient full steel planetary gearing.

Complete with heavy duty integrated wireless remote. Available with Steel Rope or Armortek Synthetic Rope and Aluminum Fairlead.

SPECIFICATION

		LINE PULL	LINE SPEED	AMP DRAW	
		LB	FT / MIN	12V	24V
RATED LINE PULL	9,500 lb	0	65	80	45
MOTOR: 12V	6.5 hp	4,000	12.5	300	175
GEARING	110:1	6,000	11.81	400	230
BRAKING ACTION	Auto in the drum	9,500	8.86	530	335
DRUM SIZE DIA X L	2.5" x 8.8"	LAYER OF WIRE ROPE		LINE PULL (LB)	
CABLE SIZE DIA X L	0.4" x 98 ft	1		9,500	
MOUNT PATTERN	10" x 4.5"	2		7,706	
DIMENSIONS	22.7" x 6.3" x 8.5"	3		6,482	
WEIGHT	90 lb	4		5,400	

FEATURES

- Weather sealed high performance motor
- Heavy duty 3 stage gearbox
- Heavy duty drum supports
- Full steel planetary gearing
- Full load holding brake
- Every winch is 100% load tested
- Chip resistant gloss paint finish

INCLUDES

- 10 ft remote handset
- 5/16 hook
- Aluminum or roller fairlead (synthetic rope or steel cable)
- Heavy duty battery leads
- Stainless steel mounting hardware
- 0.27" x 98 ft synthetic rope or 0.28" x 131 ft steel cable



STEEL & SYNTHETIC VERSIONS AVAILABLE



DETAILK2.COM/WINCHES

78



SAMURAI 9,500 LB SHORT DRUM WINCH

ITEM NUMBER / UPC

S9500SD / 826518003285
S9500SD-SR / 826518003230

DESCRIPTION

The narrow drum version of the best selling 9500. A total width of 17.2 inches ensures this is the perfect product for limited space. The 5.0hp motor delivers 9500lb of pulling power in space normally designed for Winches with half the power.

The Short Drum winch is the preferred choice of the British Military on specialist vehicles currently serving in action. Available with synthetic rope and aluminium fairlead, to give a total weight of 44 lbs.

SPECIFICATION

		LINE PULL	LINE SPEED	AMP DRAW	
		LB	FT / MIN	12V	24V
RATED LINE PULL	9,500 lb				
MOTOR: 12V	5 hp	0	23	80	70
GEARING	230:1	3,000	12.5	170	140
BRAKING ACTION	Auto in the drum	6,000	9.8	260	210
DRUM SIZE DIA X L	2.5" x 4.7"	9,500	6.4	380	270
CABLE SIZE DIA X L	0.4" x 46 ft	LAYER OF WIRE ROPE		LINE PULL (LB)	
		1		9,500	
MOUNT PATTERN	5.9" x 4.5"	2		7,706	
DIMENSIONS	17.2" x 6.3" x 10.7"	3		6,482	
WEIGHT	80 lb	4		5,593	

FEATURES

- Power in and power out
- High quality 5 hp series wound motor
- Heavy duty waterproof contactors
- Full steel planetary gearing
- Double sealed motor and drum
- Full load holding brake
- Integrated wireless remote

INCLUDES

- 0.4" x 46 ft wire rope
- 10 ft remote handset
- Heavy duty stainless steel fairlead
- Heavy duty battery leads
- Isolation switch
- Stainless steel mounting hardware
- Built-in wireless remote
- 5/16 hook



STEEL & SYNTHETIC VERSIONS AVAILABLE



DETAILK2.COM/WINCHES



SAMURAI 17,500 & 20,000 LB WINCHES

ITEM NUMBER / UPC

S17500 / 826518003209
 S17500-SR / 827518008096
 S20000 / 826518003216
 S20000-SR / 826518005616

DESCRIPTION

Warrior Winches are excited to announce the arrival of the colossal Samurai 17500 & 20000lb Winches. Designed for the toughest of applications & tested in the most extreme environments imaginable, these Winches boasts a massive 7.0 & 7.5 hp Series wound motors respectively.

Double sealed drum on maintenance free bearings and quiet, fully sealed efficient full steel planetary gearing ensures these immense Warriors are ready for any battle.

SPECIFICATION

S17500		S20000	
RATED LINE PULL	17,500 lb	RATED LINE PULL	20,000 lb
MOTOR: 12V	7 hp	MOTOR: 12V	7.5 hp
GEARING	430:1	GEARING	430:1
BRAKING ACTION	Auto in the drum	BRAKING ACTION	Auto in the drum
DRUM SIZE DIA X L	3.5" x 8.6"	DRUM SIZE DIA X L	3.5" x 8.6"
CABLE SIZE DIA X L	0.5" x 85 ft	CABLE SIZE DIA X L	0.47" x 87 ft
MOUNT PATTERN	10" x 4.5"	MOUNT PATTERN	10" x 4.5"
DIMENSIONS	24" x 8.5" x 10"	DIMENSIONS	24" x 8.6" x 10.7"
WEIGHT	147.7 lb	WEIGHT	158.7 lb



FEATURES

- All brass (no corrosion) series wound motor
- Double sealed motor
- Sealed waterproof contactor
- Reinforced plastic contactor cover
- Doubled sealed drum (G-box/ motor)
- Sealed 3 stage planetary gears
- Stainless steel 4 way fairleads
- High quality steel drum supports

INCLUDES

- 0.5" x 85 ft wire rope
- 10 ft remote handset
- Heavy duty stainless steel fairlead (wire version)
- Alloy fairlead (synthetic rope version)
- Heavy duty battery leads
- Isolation switch
- Stainless steel mounting hardware
- Wireless remote



STEEL & SYNTHETIC VERSIONS AVAILABLE

DETAILK2.COM/WINCHES



DESCRIPTION

The Predator is designed for hard-core competition. Two powerful 7.2HP sealed motors provide performance that is truly out of this World. Together with a 108:1 ratio 3 stage planetary gearbox, this winch handles the most extreme off-road punishment.

With a surprisingly low draw of only 140 amps (at no load), the Predator also contains an innovative “multi stop” 10% ratchet brake design, which provides zero drag when returning the “cable in”, and is situated away from the drum to prevent any damaging heat transferring to your Armortek or Synthetic rope.

The steel drum flanges are precision machined to 0.39” on either side to resist the unique loading characteristics of synthetic rope, while the Alloy Carbon gears are heat treated and tempered to 62HRc rating for extra strength. This Warrior from another dimension will mercilessly prey on its weaker rivals, hunting the opposition down. At 10kg lighter than any of its nearest competitors, with off-load line speeds from 65ft per minute & available with or without synthetic rope, there’s a Predator out there, ready & waiting, for everyone!

SPECIFICATION

RATED LINE PULL	10,000 lb	LINE PULL	LINE SPEED	AMP DRAW
		LB	FT / MIN	12V
MOTOR: 12V	7.2 hp	0	66	140
GEARING	108:1	4,000	19.7	400
		6,000	16.7	560
DRUM SIZE DIA X L	2.8” x 8.42”	8,000	13.1	690
		10,000	10.5	790
CABLE SIZE DIA X L	0.35” x 124 ft	LAYER OF WIRE ROPE	LINE PULL (LB)	TOTAL ROPE ON DRUM (FT)
MOUNT PATTERN	10” x 4.5”	1	10,000	18.4
		2	8,153	41.0
DIMENSIONS	18.8” x 10.3” x 13.9”	3	6,881	68.9
		4	5,953	101
WEIGHT	99 lb	5	5,245	131.2

PREDATOR 10,000 LB DUAL MOTOR WINCH

ITEM NUMBER

P10000D-SR

UPC

826518005272

FEATURES

- Dual 7.2 hp sealed motors
- Sealed motor conforms to IP67
- Sealed waterproof contactor
- “Multi-stop” 10% ratchet brake design
- Sealed 3 stage planetary gears
- Alloy carbon gears hardened to 62HRc rating
- No load speed of 65 ft / min

INCLUDES

- 0.35” x 124 ft synthetic Armortek rope
- Wireless remote with LCD display
- Heavy duty remote control
- Silver Warrior aluminum fairlead
- Heavy duty battery leads
- Stainless steel mounting hardware
- 12 ton competition hook



T1000 ELITE COMBAT WINCHES

81



DESCRIPTION

The T1000 Series Winches are built specifically for military use, able to withstand extreme climates and temperatures. Features include hardened 3 stage planetary gears for reliable and efficient use in the harshest environments. The waterproof remote control has thermometric LED indicators signals to monitor the temperature of the motor and high temp lithium grease is used which doesn't solidify in extreme climates. Coupled with corrosion & chemical resistant matte black powder coat & a stainless steel fairlead makes this a formidable winch able to withstand whatever is thrown at it.

SPECIFICATION

T1000-100 & T1000-100AE		T1000-145 & T1000-145AE	
RATED LINE PULL	10,000 lb	RATED LINE PULL	14,000 lb
MOTOR: 12V	6.2 hp	MOTOR: 12V	7.2 hp
GEARING	228:1	GEARING	228:1
DRUM SIZE DIA X L	2.5" x 8.6"	DRUM SIZE DIA X L	2.5" x 8.6"
CABLE SIZE DIA X L	0.36" x 82 ft (AE) 0.36" x 82 ft (WR)	CABLE SIZE DIA X L	0.43" x 65.6 ft (AE) 0.43" x 75.5 ft (WR)
MOUNT PATTERN	10" x 4.5"	MOUNT PATTERN	10" x 4.5"
DIMENSIONS	22.6" x 6.3" x 10.2"	DIMENSIONS	22.6" x 6.3" x 10.2"
WEIGHT	61.7 lb (AE) 82.7 lb (WR)	WEIGHT	82.6 lb (AE) 90 lb (WR)
T1000-220 & T1000-220AE			
RATED LINE PULL	22,000 lb		
MOTOR: 12V	7.4 hp		
GEARING	450:1		
DRUM SIZE DIA X L	3.5" x 8.5"		
CABLE SIZE DIA X L	0.55" x 65.6 ft (AE) 0.55" x 78.7 ft (WR)		
MOUNT PATTERN	10" x 4.5"		
DIMENSIONS	24.1" x 6.3" x 10.2"		
WEIGHT	136.6 lb (AE) 165.3 lb (WR)		



ITEM NUMBER / UPC

T1000-100 / 827518007167
 T1000-100AE / 827518007174
 T1000-145 / 827518007181
 T1000-145AE / 827518007198
 T1000-220 / 827518007204
 T1000-220AE / 827518007211

FEATURES

- IP68 rated military grade winch and control box
- Hardened 3 stage planetary gears
- Waterproof remote control with LED indicators
- Corrosion and chemical resistant powder coat
- High temperature lithium grease that won't solidify in extreme temperatures

INCLUDES

- Armortek winch rope (or steel rope available)
- Aluminum fairlead (or stainless steel fairlead for wire rope)
- Stainless steel mounting hardware
- Hook



STEEL & ARMORTEK VERSIONS AVAILABLE

DETAILK2.COM/WINCHES



NH SERIES HYDRAULIC WINCHES

ITEM NUMBER / UPC

10000NH / 826518003360
15000NH / 826518003377

DESCRIPTION

Compact, tough. A hydraulic winch for industrial and commercial applications. The unique patented steel gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding. Stainless steel roller fairleads and fittings are standard.

SPECIFICATION

10000NH		15000NH	
RATED LINE PULL	10,000 lb	RATED LINE PULL	15,000 lb
MAX LINE PULL	12,500 lb	MAX LINE PULL	17,000 lb
MOTOR	Hydraulic Dis 50 ml/r	MOTOR	Hydraulic Dis 80 ml/r
GEARING	33:1	GEARING	37:1
DRUM SIZE DIA X L	2.8" x 8.8"	DRUM SIZE DIA X L	3.5" x 8.8"
CABLE SIZE DIA X L	0.4" x 87 ft	CABLE SIZE DIA X L	0.5" x 87 ft
MOUNT PATTERN	10" x 4.5"	MOUNT PATTERN	10" x 4.5"
DIMENSIONS	20" x 7.3" x 8.8"	DIMENSIONS	20.9" x 8.1" x 9.7"
WEIGHT	121 lb	WEIGHT	143 lb

FEATURES

- Patented heavy duty gearing
- Integral, automatic failsafe brake
- Spring engaged manual free-spool
- Stainless steel fairlead and fittings
- Rugged and compact for long life

INCLUDES

- Steel cable
- Heavy duty roller fairlead (10000NH / 15000NH)
- 5/16 or 3/8 hook





NW SERIES HYDRAULIC WINCHES

83

ITEM NUMBER / UPC

10000NW / 826518005159
15000NW / 826518005166

DESCRIPTION

Compact, tough. A hydraulic winch for industrial and commercial applications. The special heat treated planetary gearing system combined with a highly efficient and powerful hydraulic motor ensures maximum performance over the full load range.

Complete with internal brake to ensure maximum control and load holding.

FEATURES

- Patented heavy duty gearing
- Integral, automatic failsafe brake
- Spring engaged manual free-spool
- Rugged and compact for long life
- Meets the requirements of SAE J706

SPECIFICATION

10000NW		15000NW	
RATED LINE PULL	10,000 lb	RATED LINE PULL	15,000 lb
MAX LINE PULL	12,500 lb	MAX LINE PULL	17,000 lb
MOTOR	Hydraulic Dis 100.8 ml/r	MOTOR	Hydraulic Dis 160 ml/r
GEARING	16:1	GEARING	17.2:1
DRUM SIZE DIA X L	3.9" x 9.9"	DRUM SIZE DIA X L	5" x 10.6"
CABLE SIZE DIA X L	1/2" x 86 ft	CABLE SIZE DIA X L	0.6" x 92 ft
MOUNT PATTERN	14.6" x 4.5"	MOUNT PATTERN	11.9" x 4.5"
DIMENSIONS	25" x 10.33" x 9.39"	DIMENSIONS	28.2" x 11.1" x 12"
WEIGHT	130 lb	WEIGHT	270 lb

INCLUDES

- 86 ft x 1/2" steel cable
- 5/16 hook
- Tensioner included





DESCRIPTION

Tough and compact, the JP series are heavy duty hydraulic winches designed and tested for toughest applications.

Minimum rope to drum ratio of 10:1, multi disc frictional brake, balance valve and rope tensioner as standard.

Available from 10 tonne to 40 tonne. Manufactured to meet GJB82-86 National Military Standard.

SPECIFICATION	10TJP	13.5TJP	15TJP
RATED LINE PULL	22,046 lb	29,762 lb	33,069 lb
WORKING SPEED	21.6 ft / min	24.6 ft / min	20 ft / min
ARRESTER RESP PRESS	5 Mpa	<2.5 Mpa	<2.5 Mpa
WORKING PRESSURE	20 Mpa	17 Mpa	17 Mpa
OIL FLOW	15-75 L / min	110 L / min	110 L / min
DRUM SIZE	5.4" x 12.4"	15.7" x 8.3" x 13.4"	15.7" x 8.3" x 13.4"
REC ROPE SIZE	0.6" x 157 ft	0.7" x 131 ft	0.9" x 230 ft
WEIGHT	363 lb	578 lb	628 lb
	20TJP	30TJP	
RATED LINE PULL	44,092 lb	66,138 lb	
WORKING SPEED	20 ft / min	18 ft / min	
ARRESTER RESP PRESS	<2.5 Mpa	<2.5 Mpa	
WORKING PRESSURE	17 Mpa	17 Mpa	
OIL FLOW	120 L / min	120 L / min	
DRUM SIZE	20.9" x 8.3" x 13.4"	20.9" x 11" x 14.2"	
REC ROPE SIZE	1" x 197 ft	1.3" x 197 ft	
WEIGHT	650 lb	1,257 lb	

JP SERIES HYDRAULIC WINCHES

ITEM NUMBER / UPC

- 10TJP / 826518004923
- 13.5TJP / 826518004931
- 15TJP / 826518004947
- 20TJP / 826518004954
- 30TJP / 826518004978

FEATURES

- Full float heavy duty planetary gearing
- Multi-disk friction brake
- Minimum 10:1 rope/drum ratio
- High torque industrial motor
- Air and manual clutch operation

INCLUDES

- Heavy duty rope tensioner as standard
- Balance valve as standard



4-IN-1 CORDLESS TOOL KIT

88



DESCRIPTION

Gone are the days of having too many tools that serve only one purpose.

A pressure washer, blower, inflater, and vacuum all in one, the DK2 4 in 1 Cordless Kit is a first of its kind. The lightweight and secure handle is designed to make switching attachments effortless, while the high capacity battery won't run out until the job is done.

Don't let its compact size fool you, the DK2 4-in-1 Cordless Kit's convenient size is designed for anyone to tackle any job.

SPECIFICATION

DIMENSIONS	18" x 19" x 12"
WEIGHT	12 lb
SHIPPING DIMENSIONS	15.5" x 22.5" x 6"
SHIPPING WEIGHT	14 lb

ITEM NUMBER

CHPW102

UPC

827518007105

FEATURES

CONTENTS INCLUDE:

- 20V x 2.0AS Lithium Battery x2
- 1 hour quick charging station
- High pressure washer attachment (330 PSI max pressure)
- 20 ft. water hose
- Inflater attachment
- Blower attachment
- Vacuum cleaner attachment

PRESSURE WASHER:

- Max Pressure: 330 PSI / 25 bar
- Flow: 2.5 L / min
- 1 x 19.8 ft. hose
- 1 x short lance
- 1 x spray nozzle

INFLATER:

- Max Pressure: 100 PSI / 7 bar
- 1 x 19.7 inch inflater hose
- 1 x ball adapter
- 1 x air bed adapter

VACUUM CLEANER:

- No-load speed: 0-15,000 RPM
- Air Flow: 2.5m³ / min
- Vacuum: 8000 Pa
- Container Capacity: 0.6 L

BLOWER:

- No-load speed: 0-15,000 RPM
- Air Flow: 2.5m³ / min



**POWER 2 GO
PORTABLE
CHARGING KIT**

ITEM NUMBER

P2G850

89

UPC

826518005142



DESCRIPTION

The DK2 Power 2 Go is the incredibly powerful yet versatile battery jump starter that literally sits in the palm of your hand. Slightly larger than your Smartphone, it is powerful enough to jump-start most full sized cars and trucks. All this power and it can still be easily stored in your glove box. With multiple ports and adapters included, there's no longer a need to panic when your Smartphone, tablet or laptop is running low on power. Simply plug into your DK2 Power 2 Go and watch in amazement as your device quickly charges. The P2G can be used on: Cars, Bobcats, ATVs, UTVs, Snowmobiles, Golf carts, and Boats.

SPECIFICATION

DIMENSIONS	6.3" x 3" x 1.4"
WEIGHT	2 lb
SHIPPING DIMENSIONS	11" x 2" x 8"
SHIPPING WEIGHT	2 lb

FEATURES

- NEW & Improved clamps to avoid overheating, Built in rechargeable high output Lithium-ion battery
- Upgraded copper booster cables and clamps, 14,000 mAh capacity
- Output: 12V / 5V, 2 A, peak current 500A
- 850 cold cranking amps starting current
- Can boost a single vehicle 20 times on a single charge
- Overload and over-charge protection
- Charging adapters for most major electronic devices

