


Agri-Fab®

Lawn Care Made Easy®

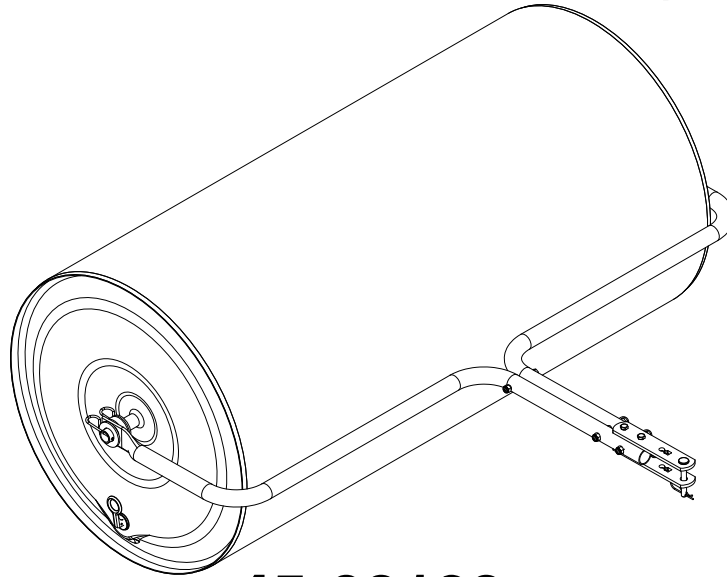

45-02168

Scan for Assembly Instructions and More!



**Video
Instruction
Guide**

SAFETY PRECAUTIONS

1. **Never** attach a garden hose to the fill/drain hole when filling. Dangerous pressure build up could occur inside roller.
2. **Never** fill roller to maximum weight without checking capability of vehicle to safely pull and stop. Refer to the towing vehicle owners manual.
3. **Never** use roller up and down hills; always work across hills and slopes.
4. **Never** use roller on slopes greater than 10°. Refer to included Slope Guide.
5. **Never** allow children to operate towed equipment.
6. **Never** allow children or others on towed equipment
7. **Always** use caution when turning, slowing, or stopping.
8. **Always** drain roller to keep from freezing.
9. **Always** keep the area clear of bystanders; paying close attention to children and pets.

SPECIFICATIONS

Roller Drum:	24" Dia. x 48" Wide, Welded Steel
O.A. Width:	Approximately 52"
Bearings:	1" I.D., Replaceable
Tow Hitch:	Std. Pin Type - 1/2" Hole
Weight w/ Water:	Up to 910 Lbs. Filled with Water
Approx. Sh. Wt.:	Approximately 114 Lbs.

ASSEMBLY INSTRUCTIONS

(SEE ILLUSTRATION BELOW)

1. Assemble a plastic bearing (7) into a hitch tube (2) so that the bearing flange is against the outside of the hitch tube. You may need to place a block of wood against bearing and carefully tap with a hammer.
2. Place a cotter pin (12) into the inside hole of the axle.
3. Slide the washer (6), spacer (3), hitch tube (2), washer (6) onto the axle.
4. Place cotter pin (12) into the outside hole of the axle.
5. Repeat steps 1 through 4 on the other side.
6. Bring the two hitch tubes together using three 5/16 X 3" hex bolts (8) and 5/16" nuts (10). **Do not tighten yet.**
7. Assemble hitch brackets (1) to hitch tubes (2) using two 5/16 X 2-1/4" hex bolts (4) and 5/16" nylock nuts (10). **Do not tighten yet.**
8. **Tighten** all bolts and nuts starting with hitch tubes (2), ending with hitch brackets (1).
9. Install hitch pin (9) through hitch brackets (1) and secure with hair cotter pin (5).
10. Adjust plug (11) size by twisting handle. Lock a plug in each end of roller drum by flipping handle down.




PLUG ADJUSTMENT

(SEE FIGURE 1)


1. Pull plug firmly in opposing directions
2. Twist ring counter-clockwise to tighten

NOTE: If the outer washer is not functioning properly, use a pair of needlenose pliers to ensure that it is free.

Figure 1.

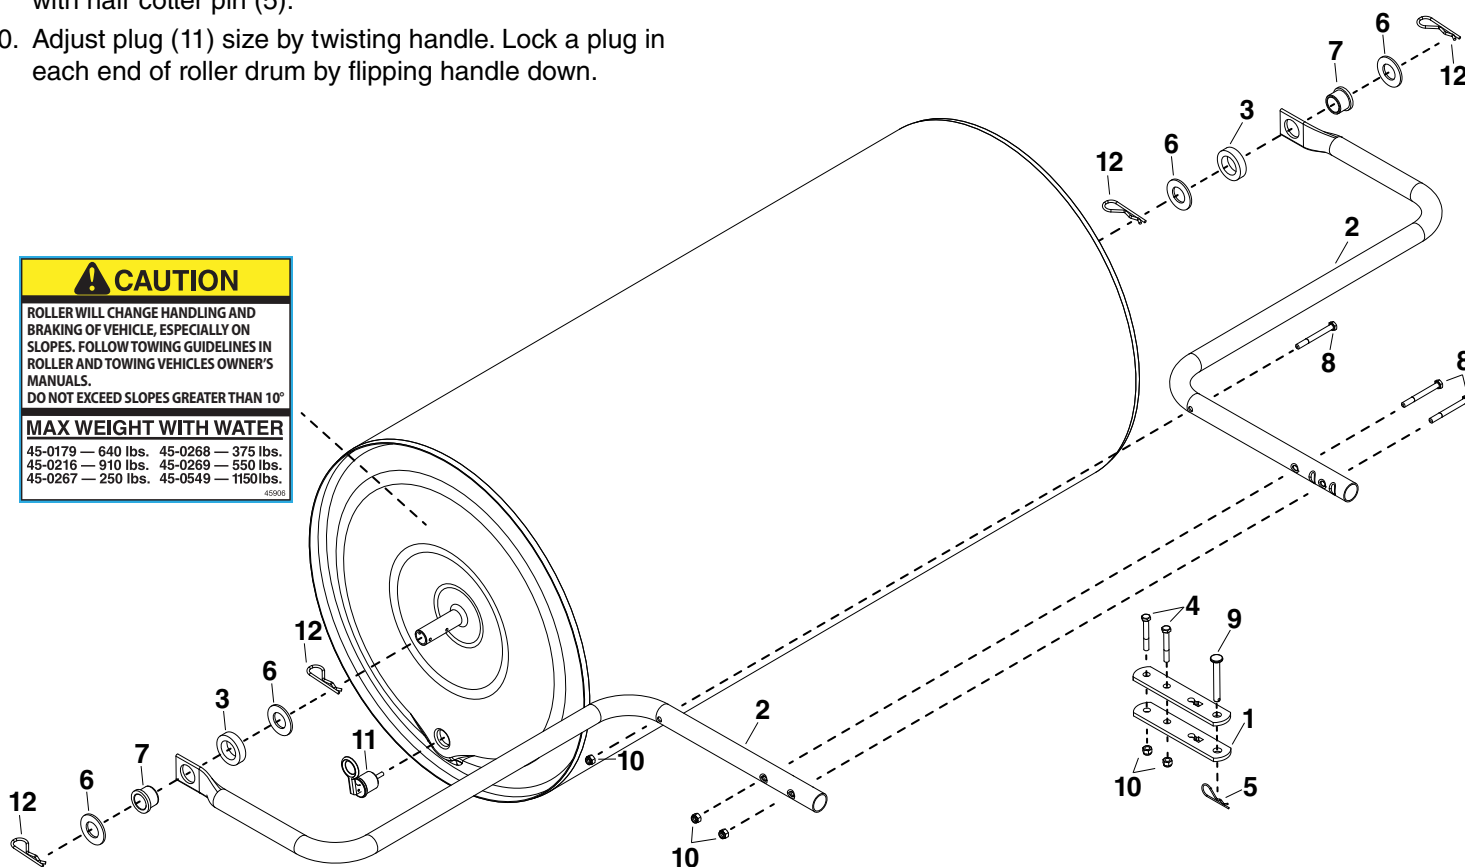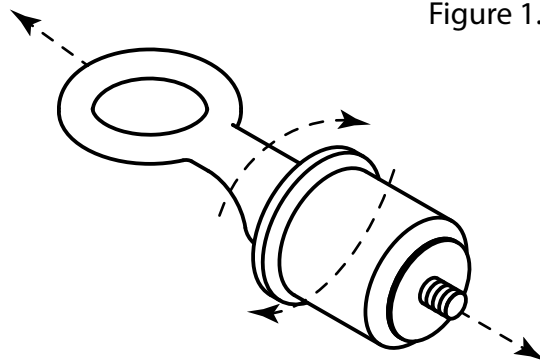

REF	PART NO.	QTY	DESCRIPTION	REF	PART NO.	QTY	DESCRIPTION
1	24192BL1	2	Bracket, Hitch (Straight)	9	47623	1	Pin, Hitch 3/8 x 3"
2	2-257BL3	2	Tube, Hitch (Roller)	10	47810	5	Nut, 5/16-18 Nylock
3	40740	2	Spacer, 1.28 ID x 2.0	11	49467	2	Plug, Roller (1-1/4)
4	43224	2	Bolt, Hex 5/16-18 x 2-1/4"	12	714-0117	4	Pin, Hair Cotter 5/32
5	43343	1	Pin, Hair Cotter			1	Assembly, 24x48 Roller
6	43528	4	Washer, 1" SAE 1.06		3-125	1	Owner's Manual
7	43632	2	Bearing, Plastic		45906	1	Roller Caution Label
8	46782	3	Bolt, Hex 5/16-18 x 3"				

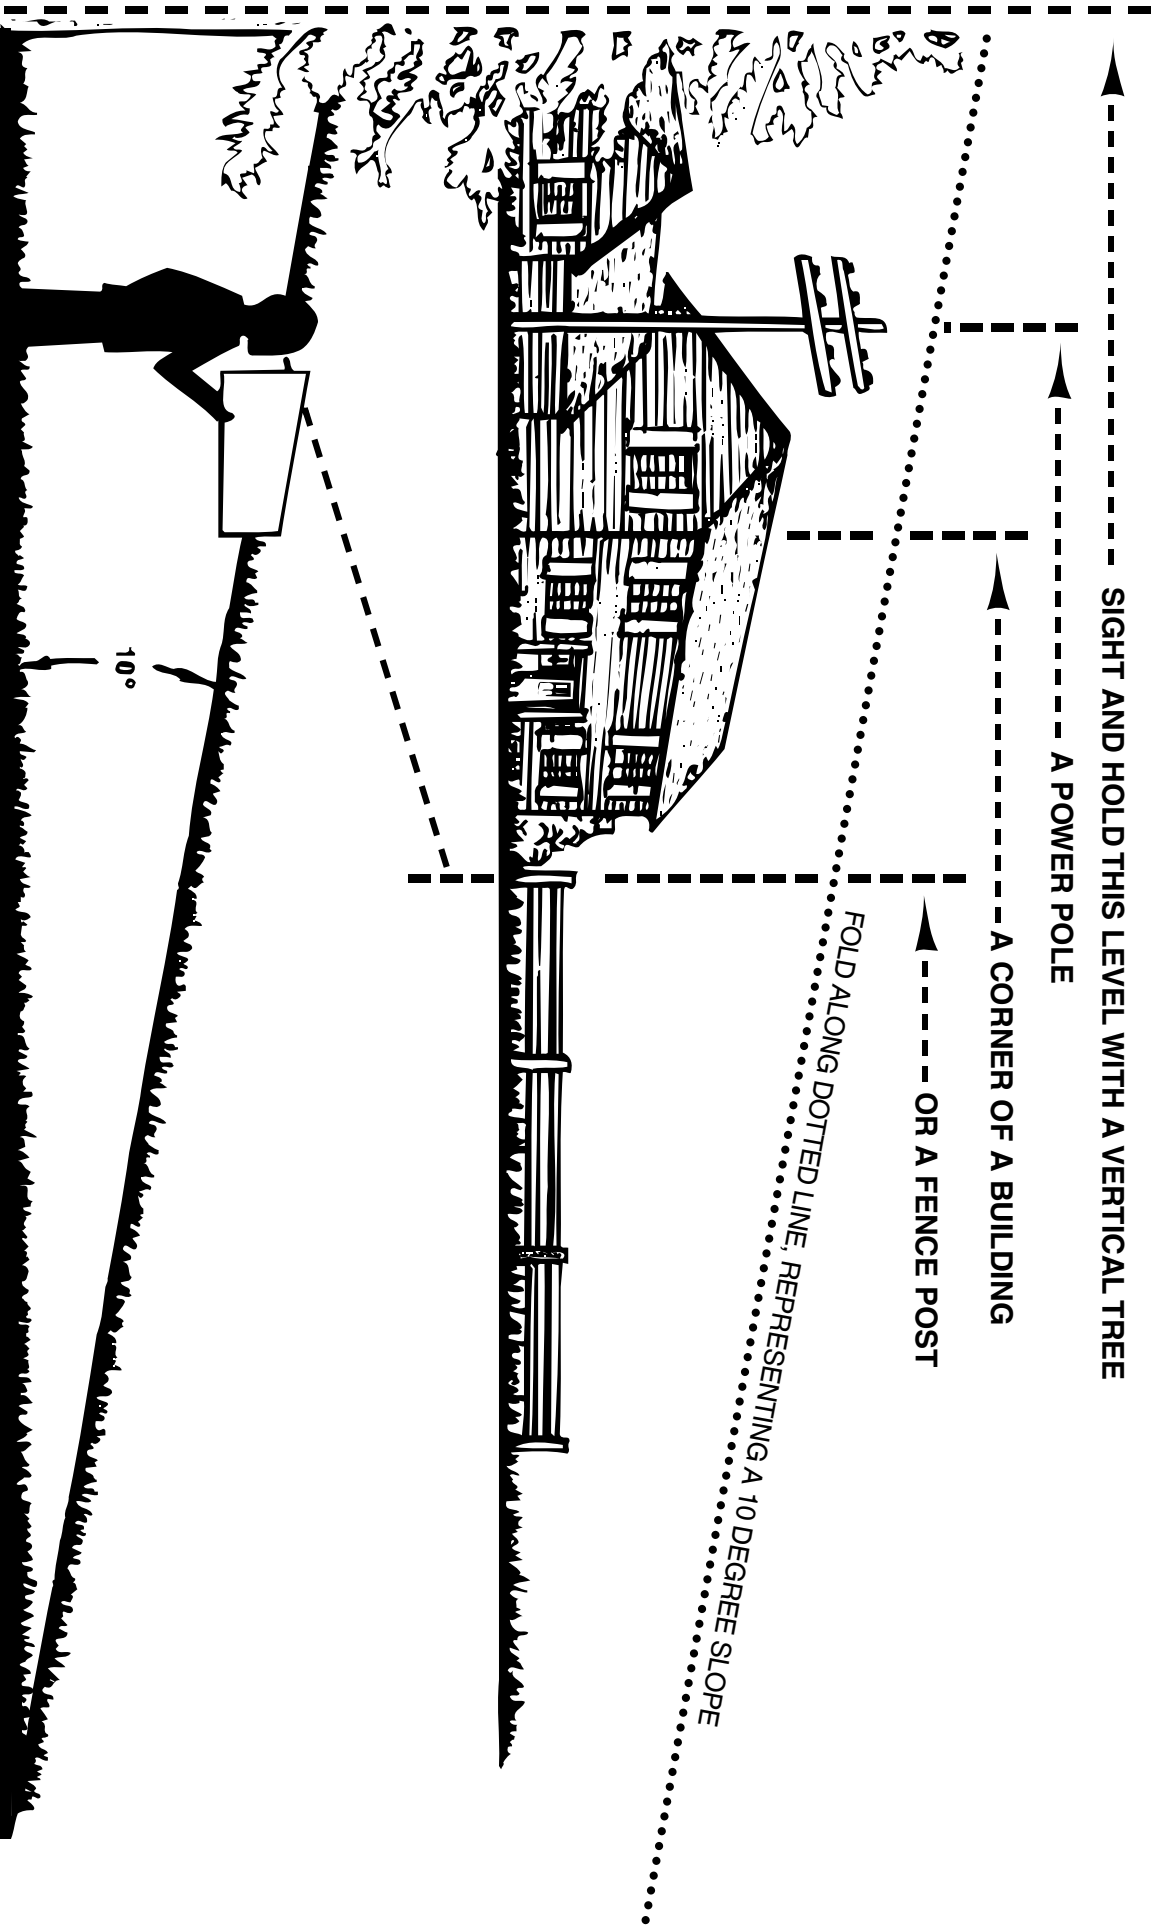

SpeedEPart *the fastest way to purchase parts* www.speedepart.com

REPAIR PARTS

Agri-Fab, Inc.
809 South Hamilton
Sullivan, IL. 61951
217-728-8388
www.agri-fab.com