




2-HDT, 2-TON MANUAL TROLLEY

262020

JET® HDT Series manual trolleys are available in capacities from 1/2 ton to 5 Tons. They are designed for low maintenance, trouble free use on wide flange H-beams, standard I-beams or curved track. Each JET® Manual Trolley conforms to OSHA regulations, and ANSI / ASME standards

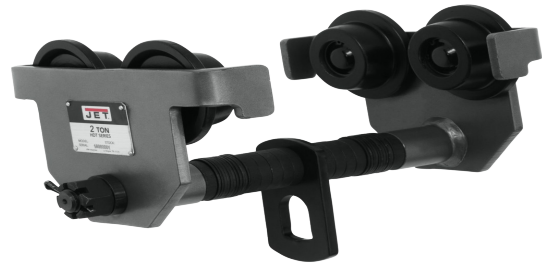

FEATURES

- Durability
- Welded all-steel frame and powder coat finish provide maximum durability and protection
- Built-in bumper guards on the side plates increase safety and extend trolley life
- Hardened steel wheels and double sealed lubricated ball bearings provide smooth movement
- Easily adjustable to wide-flange H-beams, standard I-beams or curved track with the included spacer washers
- Standards
- Complies with OSHA Regulations, ANSI / ASME B30.11 and B30.17 standards
- Certification- Load tested to 125% of capacity with certificate

JET RED ASSURANCE 2-YEAR WARRANTY

JET warrants every product it sells. If one of our tools needs service or repair, one of our Authorized Service Centers located throughout the United States can give you quick service. In most cases, any of these JPW Industries Authorized Service Centers can authorize warranty repair, assist you in obtaining parts, or perform routine maintenance and major repair on your JET tools. For the name of an Authorized Service Center in your area call 1-800-274-6848.

STAND BEHIND YOUR WORK

550+ SERVICE CENTERS NATIONWIDE | INDUSTRY-LEADING WARRANTIES | EXPERT TECHNICAL SERVICE



2-HDT, 2-TON MANUAL TROLLEY

262020

SPECIFICATIONS

Load Capacity (Tons)	2
Minimum Beam Flange Width (In.)	3-1/4 - 8
Minimum Beam Curve Radius (In.)	43



STAND BEHIND YOUR WORK

550+ SERVICE CENTERS NATIONWIDE | INDUSTRY-LEADING WARRANTIES | EXPERT TECHNICAL SERVICE



2-HDT, 2-TON MANUAL TROLLEY

262020

FULL SERIES

STOCK NO	MODEL NO	LOAD CAPACITY (TONS)	MINIMUM BEAM FLANGE WIDTH (IN.)	MINIMUM BEAM HEIGHT (IN.)	MINIMUM BEAM CURVE RADIUS (IN.)
262005	1/2-HDT	1/2	2-1/2 - 8		35
262010	1-HDT	1	3 - 8		39
262020	2-HDT	2	3-1/4 - 8		43
262030	3-HDT	3	4 - 8		51
262050	5-HDT	5	4-5/8 - 8		55

STAND BEHIND YOUR WORK

550+ SERVICE CENTERS NATIONWIDE | INDUSTRY-LEADING WARRANTIES | EXPERT TECHNICAL SERVICE