



SEPTEMBER 1, 2022

NEW PRODUCT CATALOG

3-INCH DISK CHIPPER SHREDDER

2



ITEM NUMBER

OPC513

UPC

827518009123

DESCRIPTION

The ATV-towable 3-inch direct drive OPC513 chipper shredder is powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine, and comes equipped with double edge cutting blades made with high strength steel so they stay sharp longer.

Featuring direct shaft drive centrifugal force that deteriorates trees, branches, leaves, and garden composting with ease and has a 4-stage cyclonic air filter system in the KOHLER® engine, auto-blade feeding, and 4.10/3.50-4 tires for off-road towing.

FEATURES

- Powered by a KOHLER® 2000 Series RH265 6.5HP 196cc engine **1**
- Direct drive combo chipper shredder with double edge chip and hammer shredders
- Perfect for trees, branches, leaves and garden composting
- Extra large feed chutes **2**
- Drop stand and handy removable tow bar **3**
- 4.10/3.50-4 tires **4**
- Includes 2-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**

SPECIFICATION

ENGINE KOHLER® 2000 Series RH265 6.5HP 196cc

GEARBOX Direct drive 10.7ft/lb (14.5Nm) gross torque

TIRES 10.2" (Ø26cm) x 3.9" (10cm) 4.10/3.50-4 (Off-road only, max 15mph / 24km/h)

WHEELBASE 21.7" (55cm)

TREE DIAMETER 3" (7.6cm)

CUTTERS Double edge chipper blades and hammer shredders

CHIPPER SHREDDER Leaves, brush, garden compost

EXPULSION CHUTE Adjustable

COUPLER 2" (5.08cm)

DIMENSIONS 41.7" (L) x 34.3" (W) x 37.4" (H)
106cm (L) x 87cm (W) x 95cm (H)

WEIGHT 136.7lb (62kg)

SHIPPING DIMENSIONS 29.5" (L) x 22" (W) x 20.9" (H)
75cm (L) x 56cm (W) x 53cm (H)

SHIPPING WEIGHT 158.7lb (72kg)

WARRANTY 2-year KOHLER® engine
1-year DK2 chassis



5-INCH KINETIC DRUM CHIPPER

ITEM NUMBER

OPC525

3

UPC

827518008560

DESCRIPTION

The OPC525 5-inch kinetic chipper is powered by a KOHLER® Command PRO® CH395 9.5HP 277cc engine and features dual swing chutes, double edge reversible high-speed cutting blades, bearing-mounted ATV tires and rims and built in toolbox with an extended load chute with safety e-stop.

The engine delivers 13.9ft/lb torque for superior cutting performance, and the dual V-belt direct drive and kinetic cyclonic drum pulverize up to 5-inch diameter trees. The tool-free dual swing chutes quickly open for easy drum access. The feed chute features dual integrated handles for easy equipment moving, and finally this machine comes equipped with a quick-drop stand, and a 1-7/8 inch ball removable tow bar to move around job sites with ease.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH395 9.5HP 277cc
GEARBOX	Direct drive 13.9ft/lb (18.8Nm) gross torque
TIRES	Bearing-mounted ATV (Off-road only, max 15mph / 24km/h)
TREE DIAMETER	5" (12.7cm)
CUTTERS	Double edge reversible chipper blades
CHIPPER	Auto-adjusting up to Ø5" (Ø12.7cm) trees and brush
EXPULSION CHUTE	Tool-free swing open and 180° adjustable
COUPLER	1-7/8" (4.76cm)
DIMENSIONS	91" (L) x 30" (W) x 46" (H) 231.1cm (L) x 76.2cm (W) x 116.8cm (H)
WEIGHT	308.6lb (140kg)
SHIPPING DIMENSIONS	35.8" (L) x 22" (W) x 37.8" (H) 91cm (L) x 56cm (W) x 96cm (H)
SHIPPING WEIGHT	352.7lb (160kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® Command PRO® CH395 9.5HP 277cc engine **1**
- Chips through trees and branches up to 5 inches in diameter
- Dual belt drive drum transmission with double edge reversible cutting blades for trees and brush up to 5" (12.7cm) in diameter **2**
- Bearing-mounted ATV rims and tires for off-road performance **3**
- Extra-large extended feed chute with integrated equipment moving handles and e-stop safety shutoff **4**
- Dual tool-free swing open chutes for easy drum access
- 180° tool-free rotational spout on expulsion chute
- Removable tow bar with 1-7/8" (4.76cm) hitch receiver
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty
- **OFF-ROAD ONLY AND MAX SPEED 15MPH (24KM/H)**



27-TON HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

4



ITEM NUMBER

OPS227

UPC

827518008577

DESCRIPTION

Introducing the 27-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS227 is driven by a powerful KOHLER® SH265 6.5HP 196cc engine. This machine is capable of splitting up to 25.5 inches in length and 19.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8-inch heat-treated steel wedge. The OPS227 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5HP 196cc
SPLITTING CAPACITY	25.5" (L) x Ø19.6" 64.7cm (L) x Ø54.8cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4" (Ø10.2cm) x 24" (60.9cm) stroke
HYDRAULIC FLOW RATE	15GPM (56.8LPM), two-stage
HYDRAULIC OIL CAPACITY	6.5gal (24.6L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8" (20.3cm) high, heat-treated steel
BEAM	8" (20.3cm) foot plate
VALVE	Auto-retract with adjustable detent
TIRES	D.O.T. approved 16" (40.6cm) O.D. 4.80-8 Not highway towable and 25mph (40km/h) maximum
WHEELBASE	37" (94cm)
COUPLER	2" (5.08cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	87.4" (L) x 49.2" (W) x 35.8" (H) @ 507lb 222cm (L) x 125cm (W) x 91cm (H) @ 230kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 551.2lb 180cm (L) x 80cm (W) x 50cm (H) @ 250kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5HP 196cc engine **1**
- 25.5" x Ø19.6" (64.8cm x Ø49.8cm) log capacity
- 8" (20.3cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved 16" O.D. road tires **(NOT highway towable and 25mph (40km/h) maximum)** sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15GPM (56.8LPM) pump
- 6.5 gallon (24.6 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty



32-TON HORIZONTAL & VERTICAL HYDRAULIC LOG SPLITTER

ITEM NUMBER

OPS232

5

UPC

827518008584

DESCRIPTION

Introducing the 32-ton horizontal and vertical hydraulic log splitter. The DK2 POWER OPS232 is driven by a powerful KOHLER® SH265 6.5HP 196cc engine. This machine is capable of splitting up to 25.5 inches in length and 21.6 inches in diameter with uncompromising force at a cycle speed of 13 seconds, all while using the full potential of its 8.5-inch heat-treated steel wedge. The OPS232 sits on a 37-inch wheelbase equipped with 16-inch O.D. 4.8-8 tires and includes a tow bar for easy job site moving.

SPECIFICATION

ENGINE	KOHLER® SH265 6.5HP 196cc
SPLITTING CAPACITY	25.5" (L) x Ø21.6" 64.7cm (L) x Ø54.8cm
CYCLE TIME	13 seconds
HYDRAULIC CYLINDER	Ø4.5" (Ø11.4cm) x 24" (60.9cm) stroke
HYDRAULIC FLOW RATE	15GPM (56.8LPM), two-stage
HYDRAULIC OIL CAPACITY	8.5gal (32L)
TYPE OF HYDRAULIC OIL	AW32/AW46
HYDRAULIC OIL FILTER	10 micron (1250 mesh) paper with NBR (Buna-N) seals
WEDGE	8.5" (21.6cm) high, heat-treated steel
BEAM	8.5" (21.6cm) foot plate
VALVE	Auto-retract with adjustable detent
TIRES	D.O.T. approved 16" (40.6cm) O.D. 4.80-8 Not highway towable and 25mph (40km/h) maximum
WHEELBASE	37" (94cm)
COUPLER	2" (5.08cm) ball with safety chains
ASSEMBLED DIMENSIONS & WEIGHT	89.4" (L) x 51.2" (W) x 37.4" (H) @ 529.1lb 227cm (L) x 130cm (W) x 95cm (H) @ 240kg
SHIPPING DIMENSIONS & WEIGHT	70.9" (L) x 31.5" (W) x 19.7" (H) @ 573lb 180cm (L) x 80cm (W) x 50cm (H) @ 260kg
WARRANTY	2-year KOHLER® parts and labor 1-year DK2 chassis



FEATURES

- Powered by a KOHLER® SH265 6.5HP 196cc engine **1**
- 25.5" x Ø21.6" (64.8cm x Ø54.8cm) log capacity
- 8.5" (21.6cm) heat-treated steel wedge **2**
- 13-second cycling time
- D.O.T. approved 16" O.D. road tires **(NOT highway towable and 25mph (40km/h) maximum)** sitting on a 37" (94cm) wheelbase **3**
- Folds 90° for both horizontal and vertical log splitting capability **4**
- Two-stage 15GPM (56.8LPM) pump
- 8.5 gallon (32 litres) hydraulic fluid capacity
- Auto-retracting adjustable detent valve
- 2" (5.08cm) ball coupler with safety chains **5**
- Includes 2-year KOHLER® engine parts and labor and 1-year DK2 chassis warranty



17-INCH x 21-INCH PLATE COMPACTOR

ITEM NUMBER

OPV425

UPC

827518008249

FEATURES

- Powered by a KOHLER® CH270 7HP 208cc Command PRO® Commercial Engine **1**
- Conveniently placed folding handles for easier transportation and stowaway **2**
- Open design to reduce dirt and residue build-up **3**
- Central-mounted, fully enclosed exciter for even compacting force over the entire base plate **4**
- Includes 3-year KOHLER® engine and 1-year DK2 chassis warranty

DESCRIPTION

Featuring a large 17" x 21" base plate, the OPV425 Plate Compactor doesn't disappoint when it comes to performance, and the power that drives this machine comes from a KOHLER® Command PRO® CH270 7HP 208cc engine.

With a compacting force of 3,600lb (16kn) at 4,750 vibrations per minute, this unit is the perfect solution for your compacting needs.

Designed with conveniently placed, folding handles for easy transportation and storage, open design to reduce dirt build-up, and a central-mounted, fully enclosed exciter for even compacting force over the entire base plate.

SPECIFICATION

ENGINE	KOHLER® Command PRO® CH270 7HP 208cc
BASE PLATE	17" (43.2cm) x 21" (53.3cm)
VIBRATION FREQUENCY	4,750VPM
CENTRIFUGAL FORCE	3,600lb/ft (16kn)
COMPACTING DEPTH	11.8" (30cm)
SPEED	12.6in/sec (32cm/sec)
DIMENSIONS	17" (L) x 21" (W) x 29" (H) 43.2cm (L) x 53.3cm (W) x 73.7cm (H)
WEIGHT	198.4lb (90kg)
SHIPPING DIMENSIONS	18.9" (L) x 26.4" (W) x 28.3" (H) 48cm (L) x 67.1cm (W) x 72cm (H)
SHIPPING WEIGHT	227lb (103kg)
WARRANTY	3-year KOHLER® engine 1-year DK2 chassis



4' x 6' OPEN RAIL GALVANIZED LANDSCAPE TRAILER

ITEM NUMBER

MMT4X6OG

7

UPC


82751808119

DESCRIPTION

The DK2 MMT4X6OG is specially designed for handling a variety of hauling tasks. This trailer is the perfect solution for anyone needing to pull a trailer behind a small vehicle, full size truck, law tractor, or ATV. The trailers are engineered to provide exceptional balance and ease of mobility without giving up one ounce of payload capacity. Every trailer is made from 100% welded tubular steel with expanded steel decks. Our back gate design is multi-purpose and can sit flat in the bed, up in a vertical position, or lying down as a ramp for easy loading.

SPECIFICATION


PAYLOAD CAPACITY	1,295lb
GVWR	1,600lb
CURB WEIGHT	305lb
BED DIMENSIONS	48" x 72"
OVERALL LENGTH	152" (tongue extended)
FLOOR HEIGHT	18"
CONSTRUCTION	Fully welded hot-dipped galvanized steel
SIDE RAILS	Open rail
FLOATING RAMP GATE	36" reinforced square tube steel ramp with heavy-duty round tube exterior
LIGHTING	D.O.T. approved, pre-wired, quick-connect LED lighting
HITCH HEIGHT	14"
FLOORING	100% welded, corrugated steel floor panel
SHIPPING DIMENSIONS	78" x 52" x 9"
SHIPPING WEIGHT	305lb
WARRANTY	1-year limited



FEATURES

- Capacity: 1,295 lb
- Fully welded heavy-duty hot-dipped galvanized steel frame **1**
- Corrugated steel floor & solid side and front panels / rails **2**
- Solid square tube cambered axle
- Drive-up rear ramp tailgate **3**
- 2 position dump bed axle mount with quick release lock pin
- Hitch Height: 16 inches
- Heavy-duty tail light protectors
- LED quick connect lighting with side markers
- Wheel Diameter: 12 inches
- Wheel Bolt Pattern: 5 on 4-1/2"
- Tire Size: 4.80-12 **4**
- Load Range: C
- Assembly required
- 2 inch coupler

3-IN-1 UTILITY TRAILER

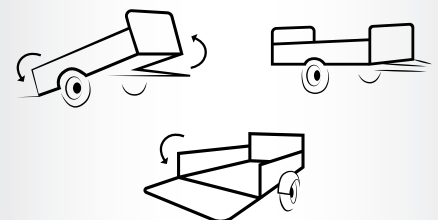

4' x 8' OPEN RAIL KIT

8



ITEM NUMBER

MFT4X8RK

UPC

827518008102

DESCRIPTION

This open rail kit is sold separate from the MFT4X8 folding utility trailer and adds more load security to the trailer during transport. To install, all it takes is to slide the stakes into the stake pockets on the sides, front, and back of your MFT4X8 trailer. Constructed with black UV powder coated steel, this open rail kit is designed to last.

FEATURES

- Black UV powder coated tubular steel construction **1**
- Mounts into stake pockets of the MFT4X8 4' x 8' folding utility trailer **2**
- Ships in a single box **3**
- Comes complete with heavy-duty hardware **4**



SPECIFICATION

CONSTRUCTION 100% welded UV powder coated steel

RAIL DESIGN Open rail

WARRANTY 1-year limited