



INSTRUCTIONS FOR THUMB RELEASE REPLACEMENT:

MODELS:

750P 760P 770P
780P 785P SL675P

To replace a missing or worn thumb release:

1. Examine the Ladder to make sure that there is no additional damage to the ladder.
2. Inspect the "key hole" that the thumb release came out of to determine if the thumb release can be repaired or not.
 - a. If the "locking pin" is still in place, the thumb release can be re secured. (Figure 2)
 - b. If you do not see the "locking pin" or you see a steel spring in the place where the "locking pin" should be, the ladder cannot be serviced. DO NOT take the ladder apart. (Figure 3)

3. Align the barbed prongs with the 2 holes in the "locking pin." (Figure 1)

4. Press the latch barbs through the "locking pin" with firm pressure.

5. Test the section of the ladder by opening and closing the section a few times to insure proper operation.

6. Inspect the ladder a last time to make sure there is not any other operational issues.

WARNING: If the ladder has any defects or does not operate in the manner intended, discontinue use immediately, and contact your Xtend+Climb® dealer.

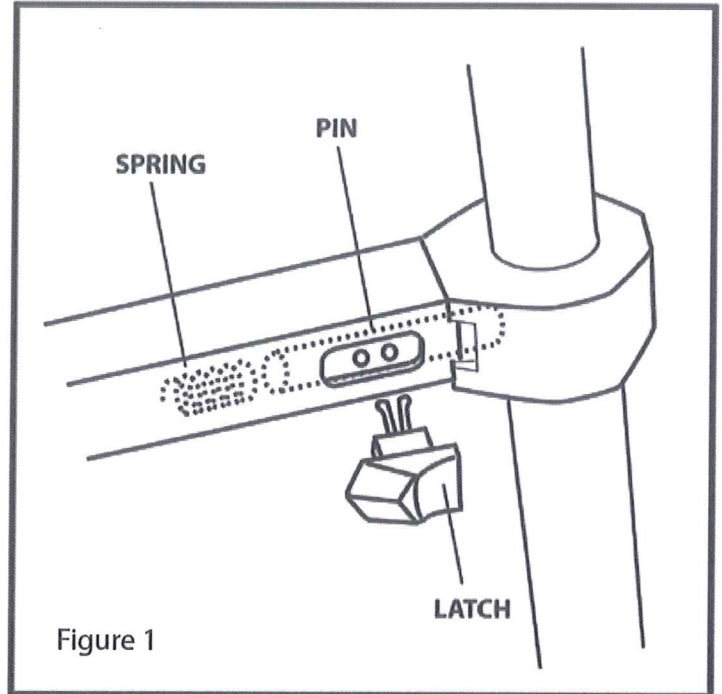


Figure 1

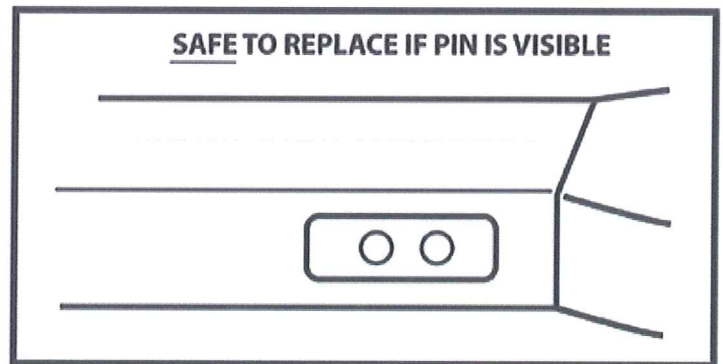


Figure 2

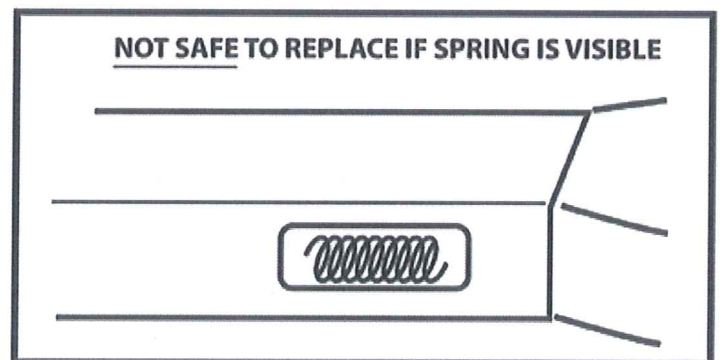


Figure 3