





Grape Solar GS-MPPT-ZENITH Series Charge Controller User Manual

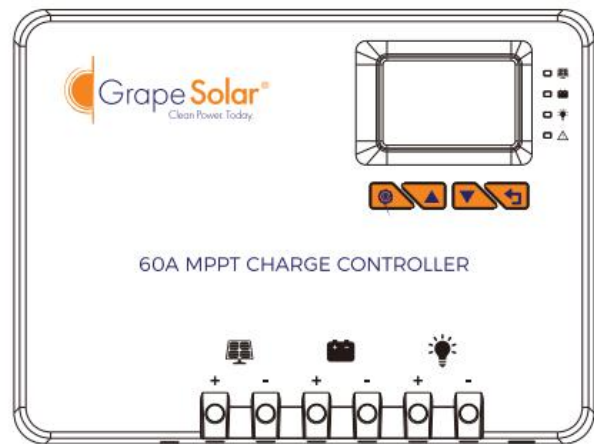

*Grape Solar reserves the rights to modify these specifications without notice.

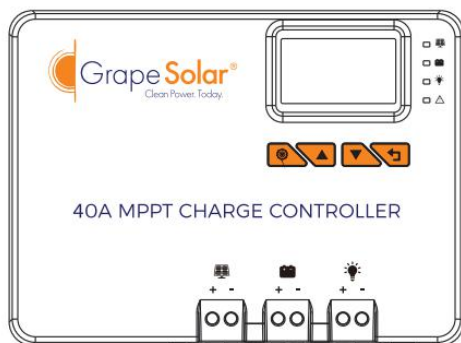

1. Warnings and Tools Icon Chart

Icons	Name	Description
	High Voltage	High voltage device. Installation should be performed by an electrician.
	High Temperature	This device will produce heat. Mount device away from other items.
	Environmental Hazard	Electronic Equipment. Do not put in landfill.
	Wire Cutter	A wire cutter is needed for cutting and stripping wires prior to connection.
	Multimeter	A multimeter is needed for testing equipment and verifying polarity of cables.
	Anti-static Glove	Anti-static gloves are recommended to prevent controller damage caused by static electricity.
	Electrical Tape	Electrical tape is recommended to safely insulate spliced or bare wires.
	Screwdriver	A common size screwdriver is needed to attach wires to the controller.



2. Safety Tips

- Review this manual thoroughly before attempting installation.
- Beware of any nearby electrical equipment that may interfere with installing this device.
- Solar panels can generate high voltages and currents, make sure your solar panels are completely covered from sunlight during installation. It is recommended that installation be performed by an qualified electrician.
- Connecting wires to this device can generate sparks, please wear proper insulation gear while installing this device.
- To avoid damage to the battery or controller, use proper fuses in wiring. Please do not hesitate to contact Grape Solar should you need help with fuse sizing.
- Always keep children away from this device.
- Be certain to use the correct gauge of wire, see below for a table of recommended wire size for various current loads.

Solar Input Current	5A	10A	20A	30A	40A	60A
Wire Cross Section Area (mm ²)	1.5	2.5	5	8	10	12
Wire AWG	15	13	10	8	7	6



3. Product Features

Thank you for choosing Grape Solar. This MPPT solar charge controller is a device for solar charge regulation and direct current output load control. This device is mainly used in small and medium sized off-grid solar power systems.


The Grape Solar Zenith series MPPT charge controllers have these features:

- By continuously checking solar panel power output changes, the Zenith controllers employ multiple MPPT charge algorithms in combination to boost charging efficiency in different weather and temperature conditions.
- Built-in buffer of 25% exceeding rated current input.
- Charging modes available for most common deep-cycle battery types in the market, including AGM (sealed lead acid batteries), GEL, Flooded, and Lithium. With the Grape Solar blue tooth controller mobile phone application, additional setting parameters may be adjusted to meet the needs of any other specialty batteries.
- Automatic recognition of 12V/24V battery system by the GS-MPPT-ZENITH-40A model. Automatic recognition of 12V/24V/36V/48V battery system by the GS-MPPT-ZENITH-60A model.
*Lithium-ion batteries excluded from this feature.
- Supports recording of charging data including power generated and power utilized for up to 300 days, compatible with Grape Solar Blue-tooth Monitoring App through IOS and Android.
- Provides multiple load control mode options for light based, time based and manually adjusted scenarios. Low no-load loss.
- Industrial grade design with reverse polarity protection for solar panels, battery and load.



4. Device Diagram


GS-MPPT-ZENITH-40A & 60A

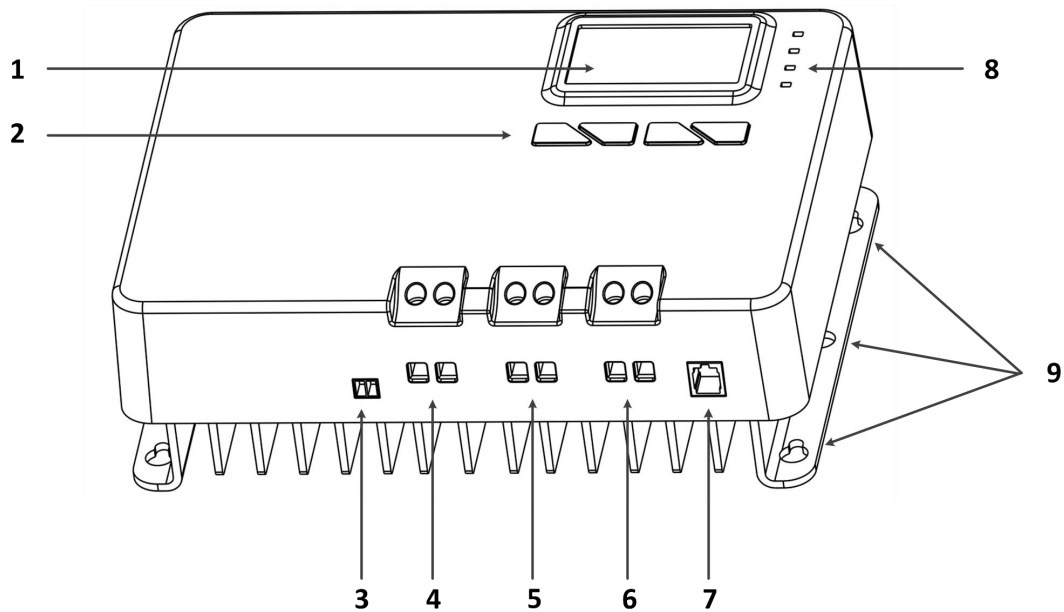


#	Description	#	Description
1	LCD Display Screen	6	DC Load Terminals
2	Function Key ([SET], [UP], [DOWN], [ESC])	7	RS485 Communication Port
3	External Temperature Sensor Terminal	8	LED Indicator (PV, BAT, LOAD, FAULT)
4	Solar Terminals	9	Installation Mounting Holes
5	Battery Terminals		




5. Mounting Instruction




Step1: Find a cool, dry and weather safe location for installation.




Step2: Mark the controller's mounting holes on the mounting surface




Step3: Drill holes in the marked mounting hole location



step4: Insert pilot screws in the mounting hole




step5: Fasten the controller into the pilot screws



step6: Continue to wire battery, solar, DC load and other accessories to the controller



6. Wire Connection Sequences

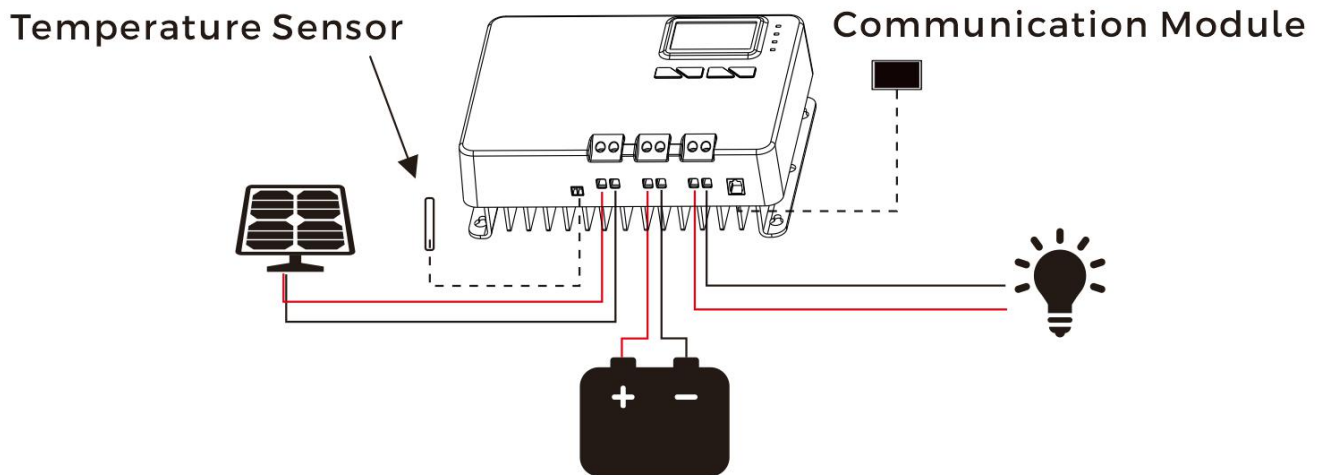

During installation of your MPPT controller, please follow the order of connection below:

1. Connect the positive battery wire followed by the negative battery wire.
2. Make sure your solar panels are fully covered to prevent electrical shock.
Connect the positive solar array output wire followed by the negative solar array output wire.
3. Connect DC load wires to the DC load output (if applicable).
4. Connect the external temperature sensor to its terminal shown above.
5. Connect the mobile application module to the communication port (if applicable).



7. LED Light Signal Interpretation Chart

LED Name	LED Display	Signal Indication
PV	Off	Solar Input Not Charging ⓘ *PV LED is generally off during nighttime.
	Double Flash	Solar Input Charge Detected
	Single Flash	Solar Input Reverse Polarity ⓘ
	Steady On	MPPT Charge Mode
	Fast Flash	Equalize or Boost Charge Mode
	Slow Flash	Float Mode
BATTERY	Single Flash	Battery Input Reverse Polarity ⓘ
	Fast Flash	Battery Over Voltage ⓘ
	Slow Fast	Battery Over Discharged ⓘ
	Steady On	Battery On
LOAD	Off	No DC Load Connected/Load Off
	Fast Flash	DC Load Short Circuit ⓘ
	Steady On	DC Load On
FAULT	Off	No Errors
	Steady On	System Error - Check Error Code

ⓘ Check the Fault light to spot if a system error may be present.




8. LED Flash Rhythm Chart







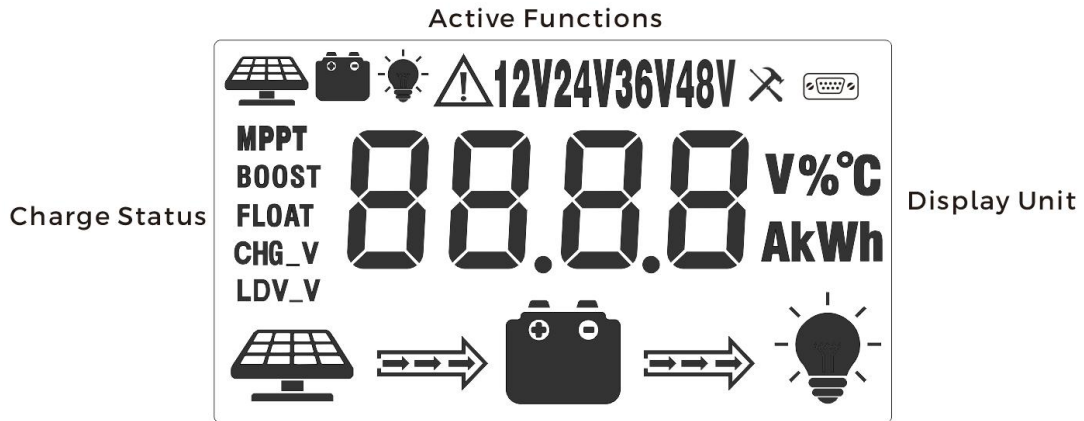


Flash Status	Indication	Description
Steady On		LED light on.
Off		LED light off.
Fast Flash		LED light blinks at frequency of 2Hz (2 times in each 1 second).
Slow Flash		LED light blinks at frequency of 0.5Hz (1 time in each 2 seconds).
Single Flash		LED light blinks for 0.1 second after every 2 seconds.
Double Flash		LED light blinks for 0.1 second twice after every 4 seconds.



9. LCD Display Interface Overview








10. LED Display Interface

Display Section	Display Layout		
Charge Status	 \Rightarrow  \Rightarrow 		
Charge Mode & Parameter	MPPT BOOST FLOAT CHG_V LDV_V	88.8.8	V%°C A kWh
Active Functions	    12V24V36V48V  		











11. Status Information

Status Icon	Indication	Status	Description
	Solar Charge Indication	Flowing	Solar Power Charging Battery
		Off	Solar Power Not Charging Battery
	DC Load Indication	Flowing	DC Load Drawing Power
		Off	DC Load Off
MPPT	Charge Mode	Steady On	MPPT Charge Mode
BOOST			Boost Charge Mode
FLOAT			Float Charge Mode
		Off	Not Charging
CHG_V	Voltage Setting	On	Setting Charge Voltage
		Off	Charge Voltage Has Been Set
LDV_V	Over Discharge Volt Settings	On	Setting Discharge Voltage
		Off	Discharge Voltage Has Been Set
	Solar Icon	Steady On	Daylight Detected
		Off	No Daylight Detected
		Fast Flash	Solar System Over Voltage
	Battery Icon	Steady On	Battery Connected and Functional
		Off	No Battery Connection
		Fast Flash	Battery Over-Discharged
	Load Status	Flash	DC Load Short Circuit or Over-Load
		ON	Load ON
		OFF	Load Off



12. Key Functionality Chart


Function Key	System Mode	Input	Input Function
	View Mode	Short Press	Enter SET mode
	View Mode	Short Press	View Previous Page
	View Mode	Short Press	View Next Page
	View Mode	Short Press	DC Load On/Off (Manual Control Program Only)

Function	System Mode	Input	Input Function
	Set Mode	Long Press	Save Data & Exit
		Short Press	Next Setting
	Set Mode	Short Press	Increase Parameter Value
	Set Mode	Short Press	Decrease Parameter Value
	Set Mode	Short Press	Exit from SET mode




13. LED Display Rules & Cycles

Pre start-up display cycle when the MPPT controller turns on, this usually last several seconds while controller detects operating environment.

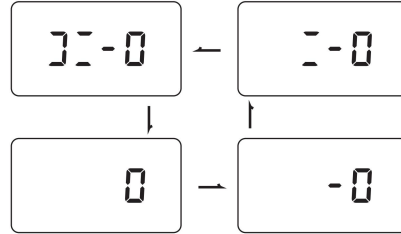

LED Screen Display Cycle

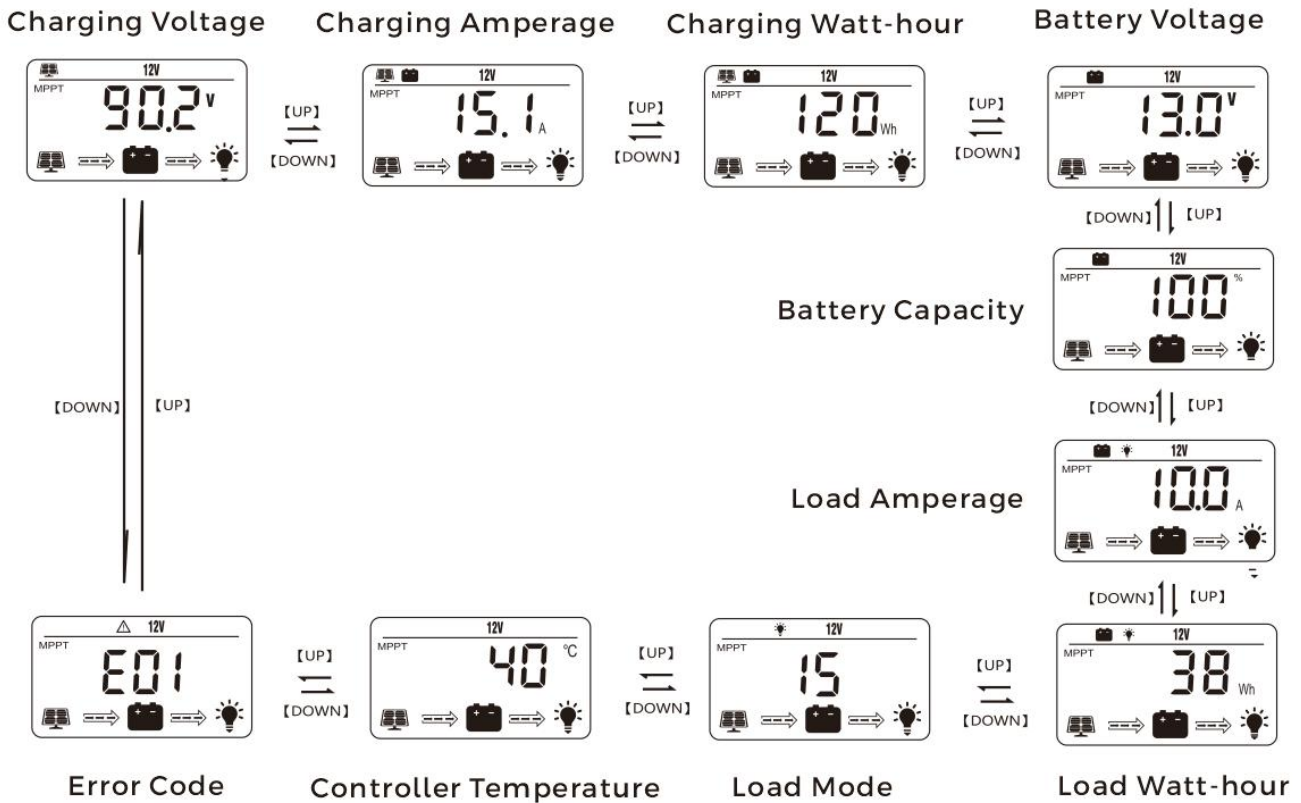


- The battery voltage view will be displayed by default. Use the up and down arrow keys to cycle through different views. The battery voltage view will resume upon 12 seconds of inactivity.
- The error code view will be displayed when an error is detected.



Setting Battery Mode

Enter SET mode by pressing the Setting key in any view other than Load Mode.

Use the up and down arrow keys to select battery mode, then long press Setting key to save.

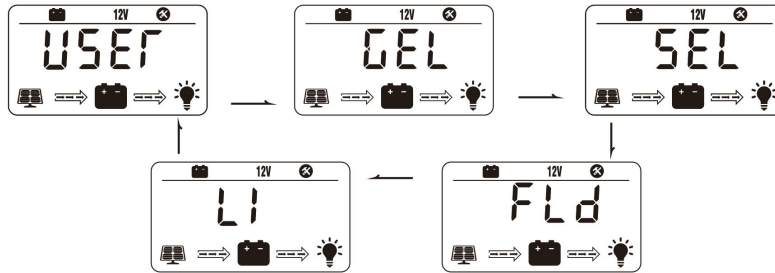


Abbreviations	Battery Types	Description
FLD	Flooded Battery	Auto-recognition with default parameters set for each type of batteries.
SEL	Sealed/AGM Battery	
GEL	Gel Battery	
LI	Lithium Battery	Some parameters can be customized.
Use	Advanced User Mode	Most parameters can be customized.




Advanced Battery Settings

In Lithium or User mode, short press the Setting key again to cycle through each parameter view. Use the up and down arrow key to adjust parameter value, then long press Setting key to save.

For Battery Type: Li

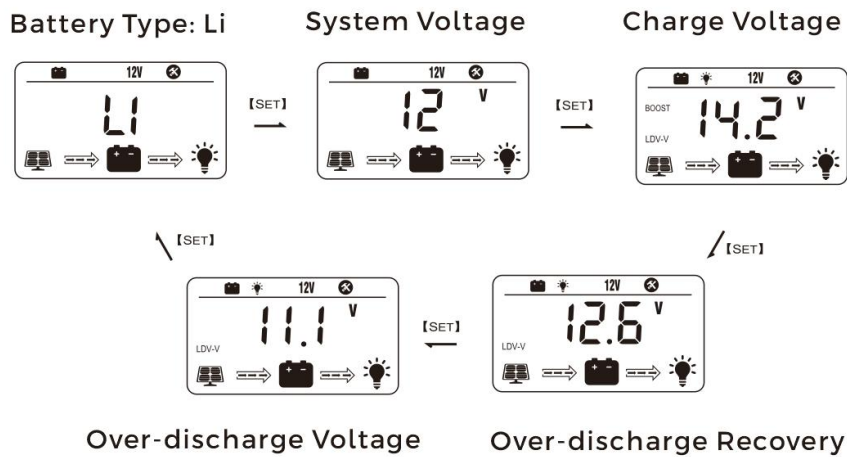

For Battery Type: USER

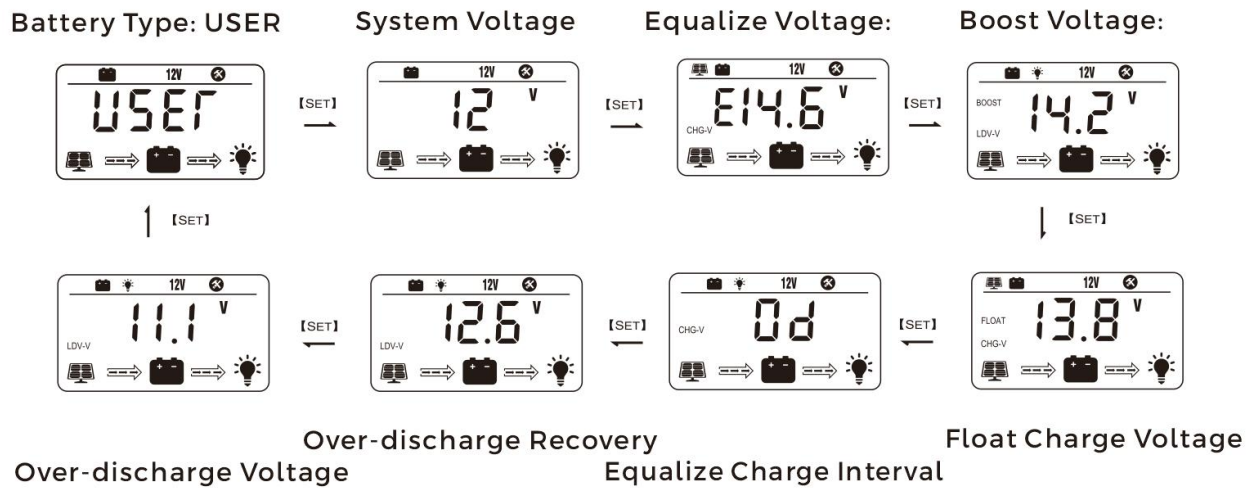




Advanced Battery Settings

Enter Load SET Mode by pressing the Setting key in Load Mode view only.

Use the arrow key to cycle through load modes before long pressing SET to save and exit. Short pressing SET will exit without saving.

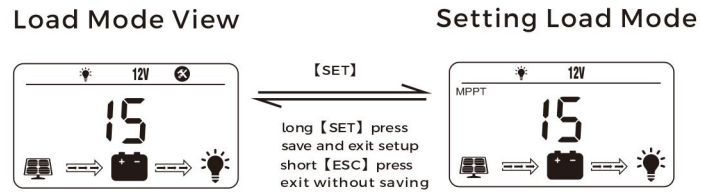

Mode	Definition	Description
0	Daylight Auto-Control	DC load turns on when daylight is detected.
1~14	Daylight On/Timer Off	DC load turns on when daylight is detected. DC load turns off according to timer.
15	Manual Mode	DC load turns on/off by pressing the Return key.
16	Testing Mode	DC load turns on and off in a quick succession.
17	Always On	DC load stays on.



14. Error Code Chart

Code	Error	Description & Quick Troubleshoot
E00	No error	No action needed.
E01	Battery Over-discharged	Battery voltage is too low. DC load will be turned off until battery re-charges to recovery voltage.
E02	Battery Over-voltage	Battery voltage has exceeded controller limit. Check battery bank voltage for compatibility with controller. Disconnect controller if battery bank voltage meets controller requirement, as the controller may be faulty.
E04	Load Short Circuit	DC load wiring short circuit. Check load output wire connection for reverse polarity, if none found, consider possibility of short circuit issues within the DC load application.
E05	Load Overload	DC load power draw exceeds controller capability. Reduce load size or upgrade to a higher load capacity controller.
E06	Overheating	Controller exceeds operating temperature limit. Ensure the controller is placed in a well-ventilated cool, dry place.
E08	Solar Over-amperage	Solar array amperage exceeds controller rated input amperage. Decrease the amperage of solar panels connected to the controller or upgrade to a higher rated controller.
E10	Solar Over-voltage	Solar array voltage exceeds controller rated input voltage. Decrease the voltage of solar panels connected to the controller, this may involve re-wiring your solar panels into a parallel connection array.
E13	Solar Reverse Polarity	Solar array input wires connected with reverse polarity. Disconnect and re-connect with correct wire polarity.
E14	Battery Reverse Polarity	Battery connection wires connected with reverse polarity. Disconnect and re-connect with correct wire polarity.

*Contact Grape Solar for live technical support on additional troubleshooting.



Controller Specification

The variable “n” is adopted as a multiplying factor when calculating parameter voltages, the rule for “n” is listed as: if battery system voltage is 12V, n=1; 24V, n=2; 36V, n=3; 48V, n=4.


For example, the equalize charge voltage for a 12V FLD (Flooded) battery bank is $14.8V \times 1 = 14.8V$. The equalizing charge voltage for a 24V FLD (Flooded) battery bank is $14.8V \times 2 = 29.6V$.

Parameter	Value				
Model No.	GS-MPPT-ZENITH-40BT			GS-MPPT-ZENITH-60BT	
Battery System Voltage	12V/24V Auto (FLD/GEL/SLD) Manual (Li/User)			12V/24V/36V/48V Auto (FLD/GEL/SLD) Manual (Li/User)	
No-load Loss	12ma (12V), 10ma (24V)			12ma (12V), 10ma (24V), 8ma (36V), 6ma (48V)	
Max Solar Input Voltage	<100V			<150V	
Rated Solar Charge Current	40A			60A	
Max Solar Input Power	600W/12V 1200W/24V			900W/12V 1800W/24V 2600W/36V 3200W/48V	
Light Control Voltage	5V*n				
Light Control Delay Time	10s				
Max Load Output Current	20A				
Operating Temperature	-35°C ~ +45°C / -31°F ~ +113°F				
IP Protection	IP32			IP32	
Net Weight	2.0 kg / 4.4 lbs			3.0 kg / 6.6 lbs	
Communication Port	RS485				
Operating Altitude	≤ 3000 meters / ≤ 9842 feet				
Controller Dimension	245*180*82.5 mm / 9.7*7.1*3.3 inches			280*210*90 mm / 11*8.3*3.5 inches	
Parameter	Battery Parameters				
Battery Types	FLD	SEL	GEL	USER	LI
Equalize Charge Voltage	14.8V*n	14.6V*n	--		--
Boost Charge Voltage	14.6V*n	14.4V*n	14.2V*n	Default: 14.2V*n	Default: 14.4V*n
Float Charge Voltage	13.8V*n			Default: 14.2V*n	--
Boost Charge Recovery Voltage	13.2V*n			Default: 13.8V*n	--
Over-discharge Recovery Voltage	12.6V*n			Default: 12.6V*n	Default: 6V*n
Over-discharge Voltage	11.1V*n			Default: 11.1V*n	Default: 11.1V*n



15. Product Dimension

GS-MPPT-ZENITH-40A

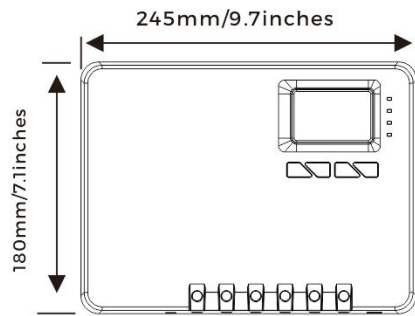


Product Dimension: 245*180*82.5mm / 9.7*7.1*3.3 inches


Installation Area Dimension: 226*138mm / 8.9*5.4 inches

Installation Hole Size: ϕ 5mm & ϕ 10mm / ϕ 0.2 inch & ϕ 0.4 inch


Connection Socket Size: 7.5*7.5mm / 0.3*0.3 inch

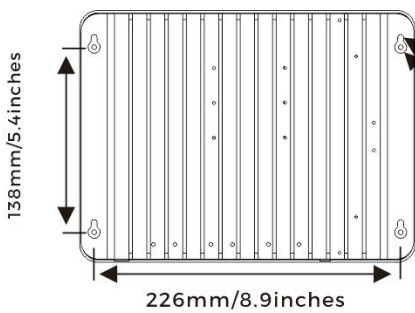

4* ϕ 5mm/4*0.2inch
4* ϕ 10mm/4*0.4inch

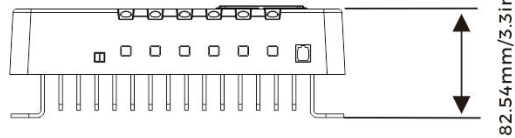

GS-MPPT-ZENITH-60A

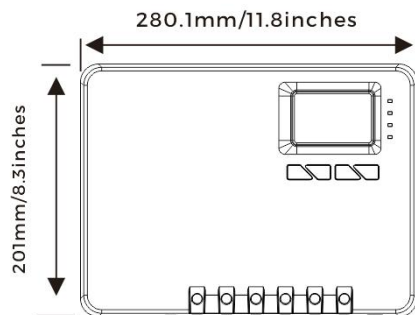


Product Dimension: 280*210*90 mm / 11*8.3*3.5 inches

Installation Area Dimension: 256*154.5mm / 10*6 inches

Installation Hole Size: ϕ 5mm & ϕ 10mm / ϕ 0.2 inch & ϕ 0.4 inch

Connection Socket Size: 7.5*7.5mm / 0.3*0.3 inch

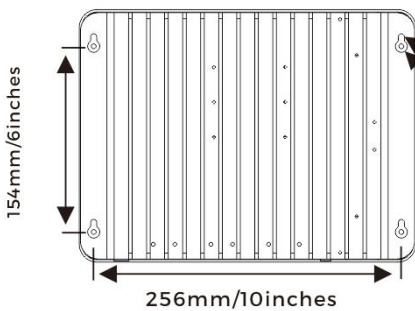

4* ϕ 5mm/4*0.2inch
4* ϕ 10mm/4*0.4inch

