


Check that you have all your parts and accessories.



RVR9 UNIT

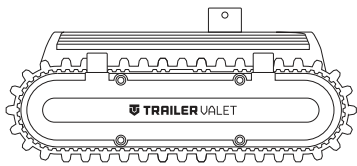

ROTATION PIN



STOW PIN




SECURITY BOLT



BRACKET CLAMPS (2X)



BASE TOWER




SCREWS (4X)




MOUNTING JOINT




BRACKET



REMOTE CONTROL



BRACKET BOLTS (4X)



BATTERY CHARGER



MANUAL




TRAILER VALET RVR5 & RVR9 w/ MOUNT BRACKET


Quick Start Guide

Rev 7.01.24


NOTE: Make sure that unit is fully charged. First charge at least 6-8 hrs.

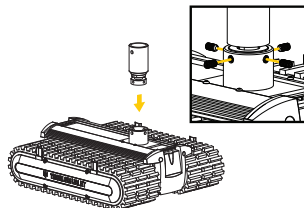

1. Fit the Base Tower into the slot on the top of the RVR and secure with the four included screws. Install the Mounting Joint on top of the Base Tower and secure with Rotation Pin.

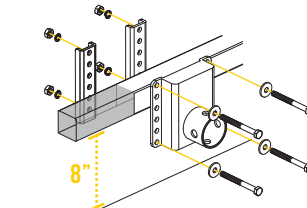


2. Check trailer height and ensure installation is on a flat surface. Install the Mounting Bracket to the trailer frame. (at least 8 inches of clearance)

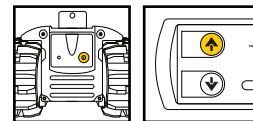


FRONT OF RVR

REMOTE CONTROL


3. Turn on RVR by pressing the start/stop button located on the front of the RVR. Turn on the remote control by pushing the forward button once (hold for a few seconds)



4. To start maneuvering, simultaneously press forward/backward and right/left buttons.



5. Use the remote to move the unit towards the bracket socket.

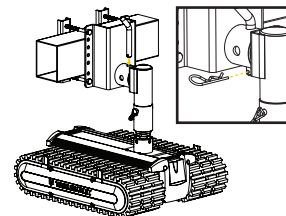

6. Install and secure the unit utilizing the stow pin, and start moving!

IMPORTANT SAFETY INFORMATION


For information and assistance, please visit our support page at TrailerValet.com or give us a call at (844) 846-9344. Scan the QR code to the right for detailed safety and usage information.



Check that you have all your parts and accessories.

* Parts sold separately

RVR UNIT

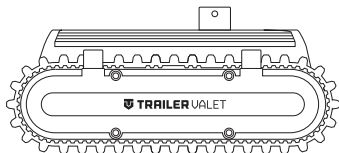

2" HITCH BALL



BALL CONVERTER



COUPLING PLATE



SPANNER WRENCH



ROTATION PIN




* BALL BASE



BASE TOWER




REMOTE CONTROL



SCREWS (4X)



BATTERY CHARGER



MANUAL





TRAILER VALET RVR3, RVR5, & RVR9 w/ BALL TOWER

Quick Start Guide

Rev 7.01.24


NOTE: Make sure that unit is fully charged. First charge at least 6-8 hrs.




1. Check trailer height and set up hitch ball and base. Ensure installation is on a flat surface.

2. Fit the Base Tower into the slot on the top of the RVR and secure with the four included screws.

3. Turn on RVR by pressing the start/stop button located on the front of the RVR. Turn on the remote control by pushing the forward button once (hold for a few seconds)



4. To start maneuvering, simultaneously press forward/backward and right/left buttons.

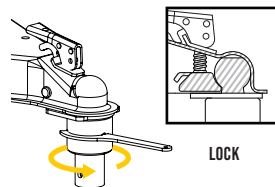

5. Attach the hitch ball w/ ball base to the coupler and tighten - Don't forget your spanner wrench and tighten that locking nut.

6. Using your trailer jack, lower the hitch towards the unit's rotating coupler and attach a rotation pin to secure and start moving!

IMPORTANT SAFETY INFORMATION

For information and assistance, please visit our support page at TrailerValet.com or give us a call at (844) 846-9344. Scan the QR code to the right for detailed safety and usage information.

