


Pistol Tactical Light Manual

Please read this user manual carefully before using the tactical flashlight



www.ospreyscopes.com

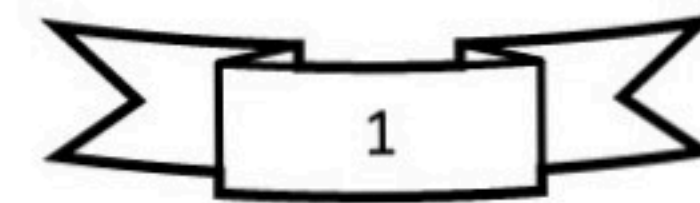


Production Specifications:

- Model No.: FL-OSP-500L
- Size: 0.98 * 1.50 * 2.91 inches
- Unit Weight: 2.96 OZ including battery
- Light: 1 * CREE XML2 U2 LED (10 wattage)
- Power: 1 * CR123A non-rechargeable battery
- Brightness: 500 lumens
- Light Distance: 250 meters
- Modes: Steady and Strobe
- Run Time: 35 – 40 minutes

Production Features:

- Aircraft aluminum alloy with black anodized finish
- Securely fits on most pistol rails with quick release mount without need for tools
- Sliding on / off switch, slide on / off / strobe / off – repeat
- IPX 4 rated design, dust and water resistant (not to be submerged)

www.ospreyscopes.com

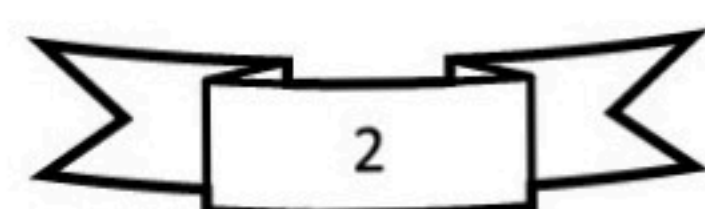

Battery Installation:

- 1) Twist the bezel counter clockwise until it becomes free of the main body
- 2) Place one cr123a battery into the battery housing
- 3) Attach the bezel and twist it clockwise until firmly snug

Mounting Instructions:

Before mounting, make sure that the firearm has the safety on and is unloaded to avoid misfiring

- 1) Turn slotted thumb lever screw (counter-clockwise) to widen adjustable rail mount
- 2) Press down on both thumb levers to depress spring tension locking plate
- 3) Slide onto rail until securely locked, turn slotted thumb lever screw clockwise



www.ospreyscopes.com

