

We Put Kids First.

# Disc Swing

## KIT INCLUDES:

QTY	DESCRIPTION
1	Disc Swing Seat
1	Loc Nut
1	Washer
1	Bolt Cover
2	2" Galvanized Screws

## INSTRUCTIONS

1. Measure and mark the bottom of the swing beam a minimum of 15" from the nearest swing or edge of the unit on each side as shown in Figure 1.
2. Drill one 5/16" hole up through the beam at the mark made in Step 1. Attach the rope to the swing beam by slipping the eye bolt through the hole and secure it with a 5/16" flat washer and loc nut. Place a bolt cover over the exposed bolt end and secure it using two 2" galvanized screws (see Figure 1).

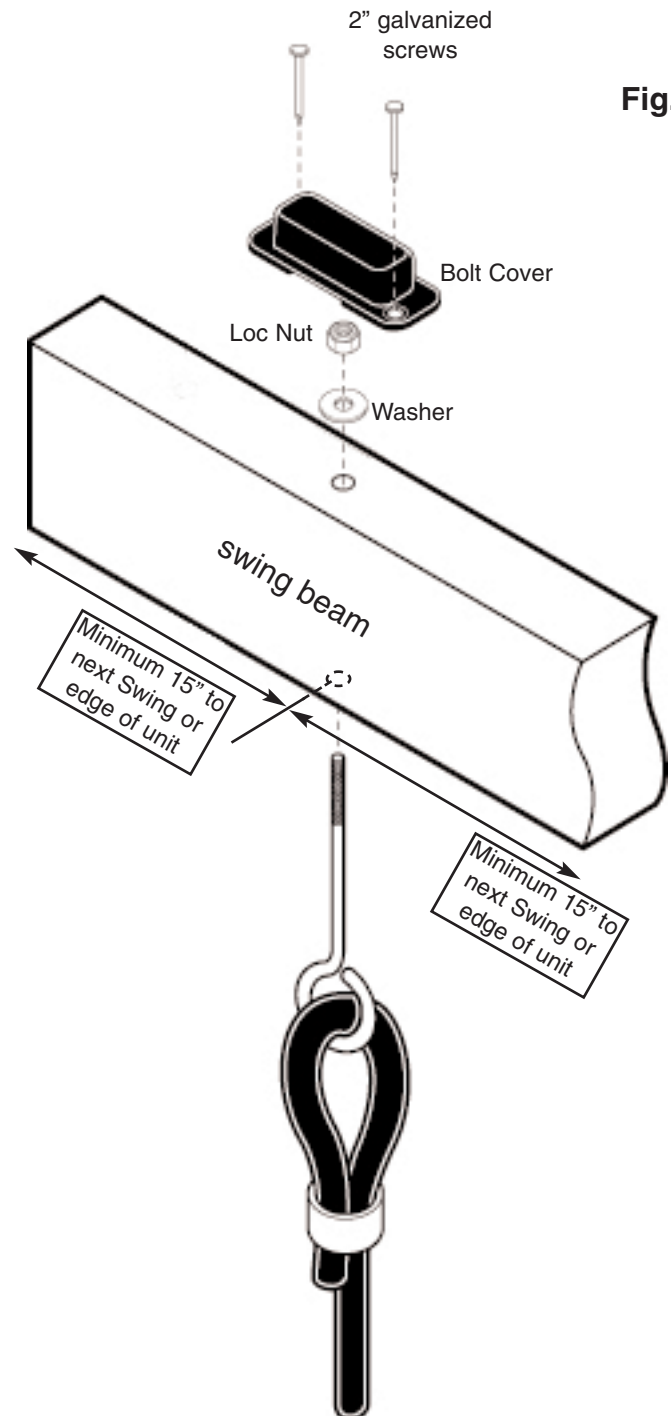


Fig. 1