



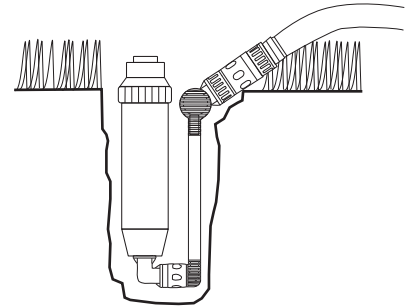

# Installing a Quick-Snap Spray

## 1 Pick the Location

The Quick-Snap Spray waters a rectangle in fine mist. There are two models: the Side Spray 5'x32' and the End Spray 4'x15'. Exact dimensions are determined by your water pressure. You will bury the sprinkler along the outside edge of the rectangle you want to water, at the center point.

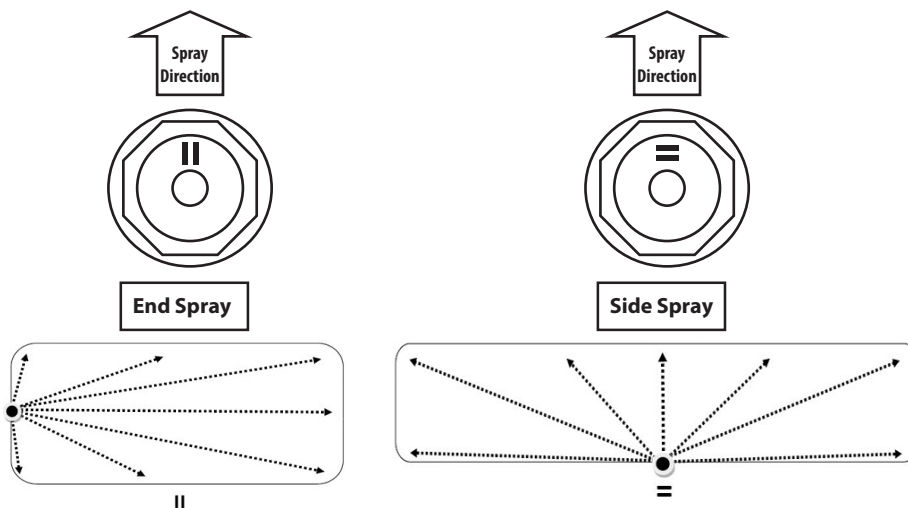

PATTERN	PRESSURE		RADIUS		FLOW RATE	
	PSI	Bars	Ft.	M.	GPM	L/M
End Strip 	20	1.5	4' x 12'	1,2 x 3,7	0.4	1.5
	30	2.0	4' x 15'	1,2 x 4,6	0.5	1.9
Side Strip 	20	1.5	4' x 28'	1,2 x 8,5	1.1	4.2
	30	2.0	5' x 32'	1,5 x 9,8	1.3	4.9

## 2 Dig a Hole

Dig the hole so the top of the sprinkler is level with the ground surface, about 7 1/2" deep and 4" across. **IMPORTANT:** make sure the unit is buried low enough to pass under your lawn mower.

## 3 Put it in

Make sure the orange cap is on the black quick-connect nozzle and place the Spray in the hole. It's OK for it to rest right on the bottom of the hole. Fill in the dirt. Leave a slight depression on the side so the SwingSnap adapter nozzle can swivel up and down. You may twist the top of the hose connector assembly right or left so it points in the direction you want to attach the hose.

## 4 Make Adjustment

Attach the hose and turn on the water. To align the spray pattern with the area you want to water, twist the whole riser right or left (not the nozzle). While the water is running, grasp the extended riser to turn it. You will hear it click as it sets in a new position. You may make minor changes to the size of the rectangle and rate of water flow by turning the silver screw in the center of the nozzle with a flathead screw driver. Turning it clockwise decreases water flow but will increase the square footage that can be watered. Turning counter-clockwise (left) will increase the water flow but decrease the square footage being watered.

You're done!


Questions, comments or concerns? Call 1-540-649-6489

# USING, MAINTAINING, AND WINTERIZING A



## USING A QUICK-SNAP SPRAY



After you've buried the unit in the ground, swing the male hose connector up. Remove the orange cap and place it right next to the Spray so you can find it later. Thread the female quick-connect onto your garden hose. Push the female connector onto the male connector until you hear a loud click. If you have not pushed it on all the way, water will leak out the sides. The riser of the Spray will pop up immediately. To remove the hose connector from the Quick-Snap, slide the sleeve on the female connector back toward the hose. The flow of water from the hose will automatically stop. Replace the orange cap. Swing the male connector on the Spray down to lie flat beneath your lawn mower blade.



# 1

## INSPECTING AND CLEANING THE FILTER

In the unlikely event that the nozzle seems clogged, you may clean its filter. The filter of the QS Spray is in the riser just beneath the nozzle. It may be removed and rinsed off. Place your hand or foot on the quick-connect to hold the unit in the ground. Unscrew the top of the Spray canister and lift the riser out. Slide the top down to expose the nozzle. Unthread the nozzle and pull the filter out of the riser. Rinse and replace.



# 2

## WINTERIZING

In order to prevent freeze damage to your Quick-Snap unit, you must make sure the water is removed before freezing. You may: 1) Remove the whole unit from the ground and replace it in the Spring; or 2) Take off the orange cap and allow the water inside to evaporate; or 3) Order an Air Purge from our website and blow the water out with a bicycle tire pump. Just attach the bicycle pump, and pump out enough of the water to eliminate the risk of freeze damage to the unit.



# 3

Questions, comments or concerns? Call 1-540-649-6489  
or visit our website: [www.quick-snap.com](http://www.quick-snap.com)