


WHAT SIZE HITCH DO I NEED?



If you are unsure or have any questions, please contact us at 844-894-6448 and we will be happy to help you select the correct hitch for your vehicle!


STEP 1

Measure the opening of the receiver tube to determine what size shank your vehicle requires. It will either be 2", 2.5" or 3". Please Note: The 3" is only applicable to some 2017 and newer Ford Super Duty trucks and some RVs/semis.

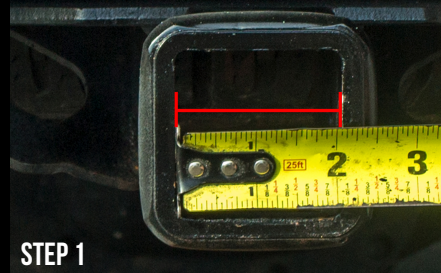

STEP 2

Park your vehicle on level ground and measure from the ground to the bottom inside of the receiver tube, then take that measurement and apply it to the information below. Based on the measurement of 19" from the ground to the bottom opening of the receiver tube this vehicle would require a 4" drop/rise hitch.

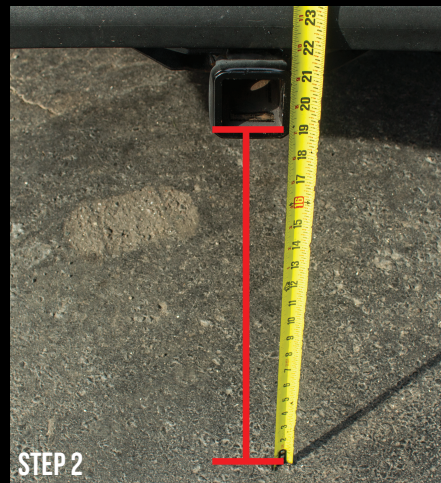

STEP 3

UNDER 16"	REQUIRES A HITCH IN THE RISE POSITION
16" - 17"	REQUIRES THE 2" DROP/RISE HITCH
18" - 19"	REQUIRES THE 4" DROP/RISE HITCH
20" - 21"	REQUIRES THE 6" DROP/RISE HITCH
22" - 23"	REQUIRES THE 8" DROP/RISE HITCH
24" - 25"	REQUIRES THE 10" DROP/RISE HITCH
26" - 27"	REQUIRES THE 12" DROP/RISE HITCH
28" - 29"	REQUIRES THE 14" DROP/RISE HITCH
OVER 30"	REQUIRES THE 16" DROP/RISE HITCH

I fall between two measurements. What should I order?

Call us for help at 844-894-6448.

I tow heavy trailers (in excess of 8,000 pounds). Does this impact what hitch I should order?

Please call us to discuss your exact measurements due to possible squatting that may occur when your trailer is loaded.

My truck has helper air bags/air suspension. Does this impact which hitch I need?

Please call us to discuss your measurements and what you are towing.