


NOTE: BEFORE REMOVING CHAIN COVER, YOU MUST UNLOCK THE CHAIN BRAKE.



WHEN INSTALLING THE CHAIN AND GUIDE BAR, YOU HAVE TO REMOVE THE CHAIN COVER. BUT FIRST, YOU MUST UNLOCK THE CHAIN BRAKE.

To unlock chain brake, pull up the front guard toward the front handle until a “click” sound is heard.

- (1) Brake
- (2) Unlocked
- (3) Locked

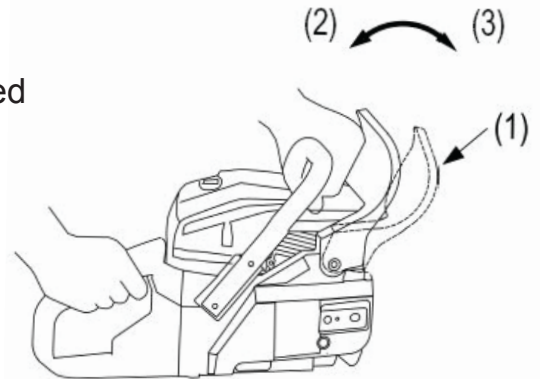

**IF YOU HAVE ANY QUESTIONS, CALL CUSTOMER SERVICE 636-532-9888
ITEM # GCS5220 VIDEO INSTRUCTIONS AT BUFFALOTOOLS.COM/MANUALS.HTML**