1000 Series Specifications











Benefits:

- Cut Accuracy of 1/64"
- Frame Never Goes Out of Square
- Smooth Repetitive Carriage Movement
- Ten Second Tool Swap
- Mobility with Folding Stand and Wheels
- Outstanding Dust Evacuation System
- Minimal Set Up Time
- Rip Cut in Either Direction
- Utilize Stop Block on Left or Right
- Saw Cover Blade Window with Light

Package Includes:

Makita 5007F Saw on Spinning Saw Insert Plate

Standard 7.25" Saw Blade

Dual Rip Gauges for Left or Right Rip Cuts

Stop Block with Bar for Cutting Strips Dust Hose and Dust Containment Brush

Folding Stand and Transport Wheels

Horizontal Measuring Tapes

Vertical Measuring Tape

Side Stand Legs

Blade Guard

Saw Cover, Viewing Port with LED Lights, and Dust Port

Standard Equipment:

Nickel Chrome Plated Guide Tubes (Zinc Plated 88"/100") Accu-Square Alignment System Accu-Glide Sealed Bearing System Accu-Fence Material Roller System Quick Release Carriage with 2 Locks


Retraction Mechanism Powder Coated Steel Frame

Cord Holder

Center Material Support

Optional Accessories:

Floating Router Insert Plate OLFA®Pivoting Knife Insert Plate Spring Hold Down ACM Rolling Shear Insert Plate **Sheet Clamp** Full Builder's Extensions Coiled Extension Cord Full Mid-Fence Frame Dust Collection Laser Guide

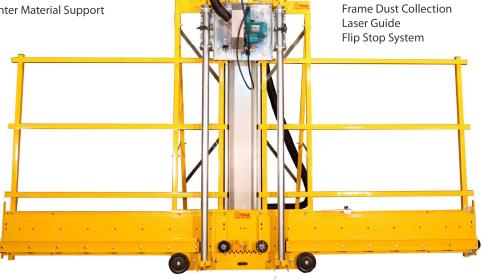

1000 Series					
Product Specifications	Full Size				
Model Number	1052	1064	1076	1088	10100
Material Rollers - Plastic	18	18	18	18	18
Maximum Cross Cut	52"	64"	76"	88"	100"
Maximum Rip Cut	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Maximum Cut Thickness	1-3/4"	1-3/4"	1-3/4"	1-3/4"	1-3/4"
Saw Blade Diameter	7-1/4"	7-1/4"	7-1/4"	7-1/4"	7-1/4"
Arbor Diameter	5/8"	5/8"	5/8"	5/8"	5/8"
Saw Motor, Makita 5007F	15 amp-120 v				
Frame Height (set up)	78"	90"	102"	114"	126"
Frame Width (set up)	122"	122"	122"	122"	122"
Frame Depth-Stand closed with Saw	15"	15"	15"	15"	15"
Frame Depth with Stand open	40"	40"	40"	40"	40"
Shipping Weight	410#	450#	460#	555#	655#