



Panel Express

INSTRUCTION MANUAL




For Technical Support, Call

770-974-0021

888-SAWTRAX (888-729-8729)

Watch an instructional video of
picking up and moving a load at:
<https://vimeo.com/417310487>

PARTS OF THE PANEL EXPRESS

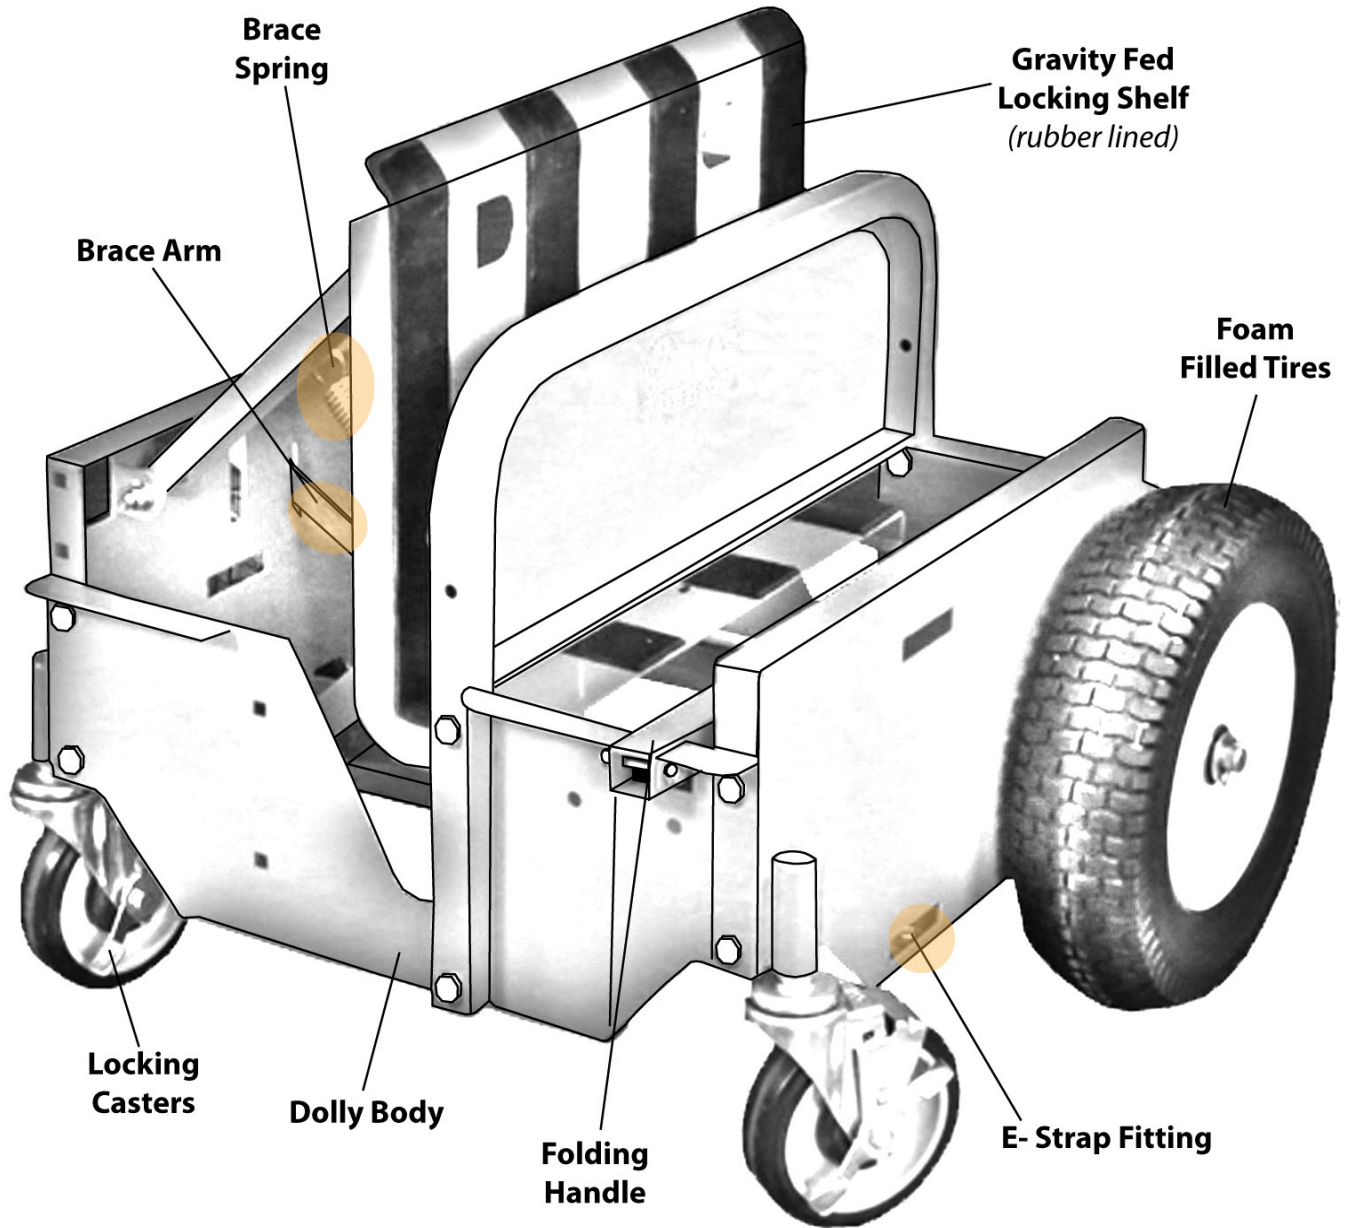


ABOUT THE PANEL EXPRESS

THE PANEL EXPRESS SELF-ADJUSTING ALL-TERRAIN DOLLY

- Clamps automatically down onto the material.
- Can carry fully framed door and window units.
- Can carry up to 18 half-inch sheets with optional shelf.
- Can carry wood, glass, granite, drywall and similar panel material.

Includes locking casters for easy loading or unloading on a sloped driveway, a convenient handle for moving the dolly when empty and maintenance free foam filled tires that never go flat. Now you can easily go across unlevel terrain when necessary. It has a 26" wheelbase and a low carry height.

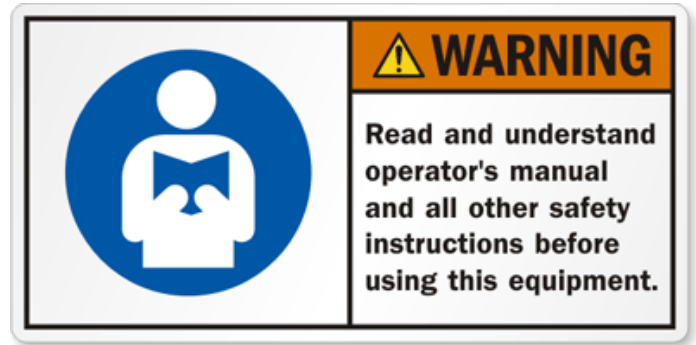

UNPACKING THE PANEL EXPRESS

When unpacking, CHECK TO MAKE SURE THAT THE DOLLY IS INTACT / UNDAMAGED and that all ordered parts are included. If any parts are missing or broken, please call Saw Trax Manufacturing as soon as possible at 770-974-0021.

IMPORTANT WARNINGS AND SAFETY PRECAUTIONS



1. Read and understand all instructions. Failure to follow all instructions may result in serious injury or property damage.
2. Do not exceed 700 lb. max weight capacity (base model). Locking brace max weight of 200 lb.
3. Do not allow persons to operate or assemble the product until they have read this manual and have developed a thorough understanding of how it works.
4. Do not modify this product in any way. Unauthorized modification may impair the function and/or safety and could affect the life of the product.
5. Use the right tool for the job. DO NOT attempt to force small equipment to do the work of larger industrial equipment. There are certain applications for which this equipment was designed. This product will be safer and do a better job at the capacity for which it was intended. DO NOT use this equipment for a purpose for which it was not intended.
6. Industrial or commercial applications must follow OSHA requirements.
7. Inspect the work area before each use. Keep work area clean, dry, free of clutter, and well-lit. Cluttered, wet, or dark work areas can result in injury.
8. Keep children and bystanders away from the work area while operating the tool. Do not allow children to handle the product.



IMPORTANT WARNINGS AND SAFETY PRECAUTIONS (Continued)



9. Be aware of all power lines, electrical circuits, water pipes, and other mechanical hazards in your work area. Some of these hazards may be hidden from your view and may cause personal injury and/or property damage if contacted.
10. Stay alert, watch what you are doing, and use common sense when operating the tool. Do not use the tool while you are tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating the tool may result in serious personal injury.
11. Dress properly. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry, or long hair can be caught in moving parts.
12. Wear the proper personal protective equipment when necessary.
13. Do not overreach. Keep proper footing and balance at all times.
14. Check for damaged parts before each use. Carefully check that the product will operate properly and perform its intended function. Replace damaged or worn parts immediately. Never operate the product with a damaged part.
15. Store the product when it is not in use. Store it in a dry, secure place out of the reach of children.
16. Use only accessories that are recommended by the manufacturer for use with your product. Accessories that may be suitable for one product may create a risk of injury when used with another tool.

OPERATING THE PANEL EXPRESS

1. While loaded, push the dolly from the side with the casters with the foam filled tires forward.
2. Do not exceed 700 lb. max. weight capacity. Be aware that moving loads have more force/weight than stationary loads. Sudden or rapid load movement may briefly create excess force causing product failure or a tipping hazard.
3. If loading a sheet larger than 5 ft. tall, ensure the brace lock is not used. (there is a possibility of the cart falling over if the center of gravity is outside the large tires caused by the leaning of a very tall sheet like loading the 4 ft. side of a 4 X 8 sheet.)
4. With the adjusting brace locked open, the maximum load is 200 lbs.
5. This equipment is designed for evenly centered loads. Off-centering of loads can result in a dangerous operating condition and may cause damage or injury.
6. Be aware that the casters behave differently without a load than with a load.
7. If on a slope, position and lock casters on the down side of the slope.
8. Do not ride on this equipment. Do not carry passengers.
9. Maintain product labels and nameplates. These carry important safety information. If unreadable or missing, contact Saw Trax Manufacturing for a replacement.

TIPS AND TRICKS



1. When loaded push the material from behind with the foam filled tires towards the front.
2. When going over obstacles like air hoses, you may want to slightly tilt the load forward to remove weight from the rear casters.
3. When not wanting to use the Self-adjusting brace mechanism, an easy way to store it so it is not lost is turn it upside down so the notch is facing up.

FEATURES

The Panel Express comes standard with two (2) locking casters for easy loading and two (2) foam filled tires that will not go flat.



The **Self-adjusting brace** mechanism automatically adjusting to hold any load up to 3.5". With the adjusting brace locked open, the maximum load is 200 lbs.

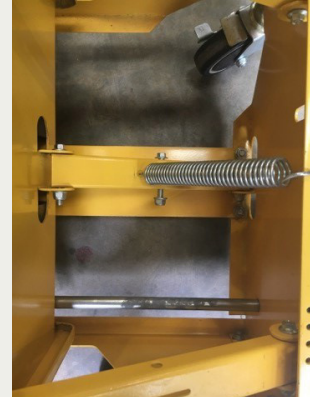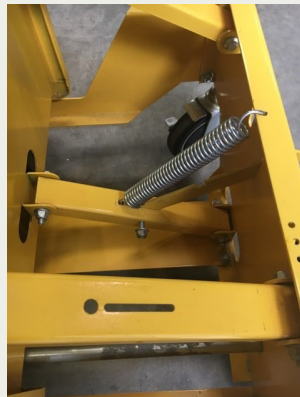

FEATURES (Continued)

Includes a convenient handle for moving the dolly when empty.



OPTIONAL UPGRADES

Need a handy place to store straps, tools, and supplies?
Just add the optional **Toolbox** to our dolly for easy storage.

Great for hand tools, mudding tool, or tie down straps. We find it is perfect for an E strap that can be used with the E strap fittings on the sides of the dolly.



Adding the **Lower Shelf** option increases the capacity to carry up to 18 half-inch sheets!




ASSEMBLY

Some assembly is required on your part to finish the Panel Express.

1. Remove Cart, Foam Wheels, and all hardware packed in the box.




2. Install the Foam Tires and Axle using the provided flat washers and cotter pins.

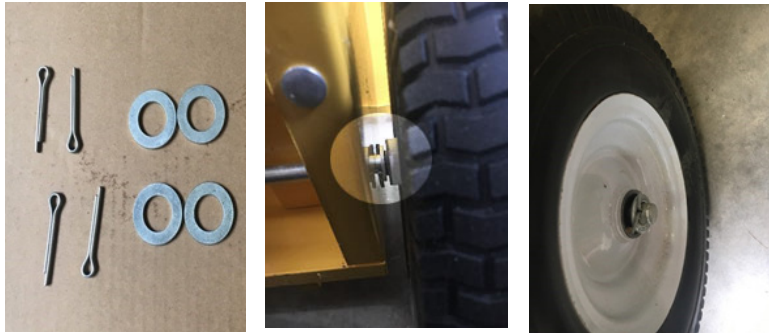

3. Install blue Locking Swivel Casters with the provided half inch lock washers.



4. Install handle Assembly using provided hardware and wrenches.

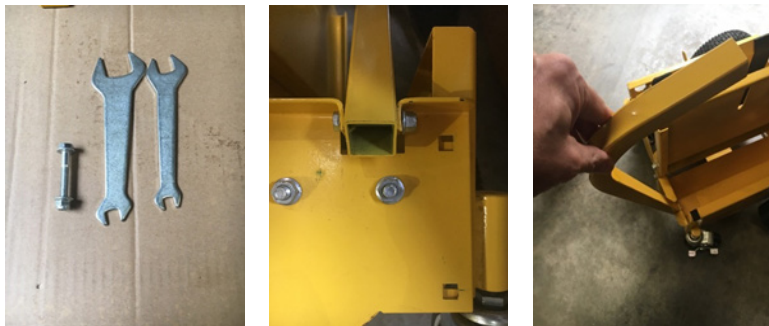

INSTALLING OPTIONAL ADDITIONS (Lower Shelf)

Required Materials Included

- Shelf Assembly
- 5/16in. x 2in. Hex Head Bolt
- 5/16in. Nylon Nut
- 1/4in. Flat Washer

Required Tools

Ratchet with Deepwell 1/2 in. Socket and 1/2in. combination wrench

1. Place Shelf Assembly onto ledge adjacent the fixed side of the middle channel.
2. Attach Shelf Assembly using two(2) 5/16in. x 2in. Hex Head Bolts, two(2) 1/4in. Flat Washers and two(2) 5/16in. Nylon Nuts. The heads of the bolts should be on the exterior of the dolly body.

Note: The Shelf Assembly will not be assembled for delivery.

Hardware will be added to the Hardware envelope and the Shelf will be placed at the top of the Dolly Box.



INSTALLING OPTIONAL ADDITIONS (Toolbox)

Required Materials Included

- Tool Box
- 5/16in. x 3/4in. Hex Head Bolt
- 5/16in. Hex Nut
- 1/4in. Flat Washer

Required Tools

Ratchet with Deepwell 1/2 in. Socket and 1/2in. combination wrench

1. Place Tool Box into Tool Box opening with angled side against middle of dolly.
2. Attach Tool Box using four(4) 5/16in. x 3/4in. Hex Head Bolts, four(4) 1/4in. Flat Washers and four(4) 5/16in. Hex Nuts. The heads of the bolts should be on the exterior of the dolly body.



Revised 08/05/2020.

For information on the compatibility of the Panel Express with any products introduced after this date, contact Saw Trax.

Warranty and Service

Saw Trax Mfg., Inc. warrants every product it sells against manufacturers' defects and each product is designed to give years of dependable service. Your new Cart or Dolly was built from the finest components available by our trained craftsmen.

Warranty Period:

The general warranty lasts for the time specified in the literature included with your product or on the official Saw Trax Mfg., Inc. branded website.

- Saw Trax Mfg., Inc. products carry a limited warranty which varies in duration based upon the product. (See *Product Listing with Warranty Period*)
- Accessories carry a limited warranty of 90 days from the date of receipt.
- Consumable items are defined as expendable parts or accessories expected to become inoperable within a reasonable amount of use and are covered by a 90-day limited warranty against manufacturer's defects.

Who is Covered:

This warranty covers only the initial purchaser of the product from the date of delivery.

What is Covered:

This warranty covers any defects in workmanship or materials subject to the limitations stated below. This warranty does not cover failures due directly or indirectly to misuse, abuse, accidents, normal wear-and-tear, improper repair, alterations or lack of maintenance. Use of these machines in the processing of metal or some other materials may void the warranty. This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state.

Saw Trax Mfg., Inc. will repair or replace, at our discretion, any component that is determined to be defective. Repair or replacement is limited to providing replacement parts from the factory. Saw Trax Mfg., Inc. assumes no responsibility for making repairs on site. Parts returned to the factory must be returned freight prepaid and include a Return Authorization (R.A.) number. Please call 770-974-0021 for a R.A. number.

Product Listing with Warranty Period:

- 90 Days- Parts, Consumable items
- 90 Days- Accessories
- 3 Year- Cart or Dolly Body

Note: Custom designed Carts/Dollies are exempt from warranty

How to Get Technical Support:

Please contact Technical Service by calling 888-SAW-TRAX. Please note that you will be asked to provide proof of initial purchase when calling. If a product requires further inspection, the Technical Service representative will explain and assist with any additional action needed.

More Information:

Saw Trax Mfg., Inc. is constantly adding new products. For complete, up-to-date product information, check with your local distributor or visit the Saw Tax Mfg, Inc. website.

Saw Trax Mfg., Inc. sells through distributors. The specifications listed in Saw Trax Mfg., Inc. printed materials and on the official Saw Trax Mfg, Inc. website are given as general information and are not binding. Saw Trax Mfg, Inc. reserves the right to effect at any time, without prior notice, those alterations to parts, fittings, and accessory equipment which they may deem necessary for any reason whatsoever.

Limitations on This Warranty:

SAW TRAX MFG., INC. SHALL IN NO EVENT BE LIABLE FOR DEATH, INJURIES TO PERSONS OR PROPERTY, OR FOR INCIDENTAL, CONTINGENT, SPECIAL, OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OF OUR PRODUCTS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

