

LET'S DO THE WORK.™

FOR



POWER TOOLS



PREPARE FOR THE REVOLUTION

# 18V



GRAPHENE  
BATTERY™

## THE FUTURE OF TOOL POWER HAS ARRIVED.



**4x**

THE BATTERY  
LIFE CYCLE

**3x**

FASTER CHARGING

**2x**

HIGHER AMP DRAW

**1<sup>4</sup> ALL**


SINGLE BATTERY  
FOR ALL

# 18V GRAPHENE™

HIGHER ELECTRICAL CONDUCTIVITY

HIGH HEAT CONDUCTANCE

FASTER CHARGING CELLS

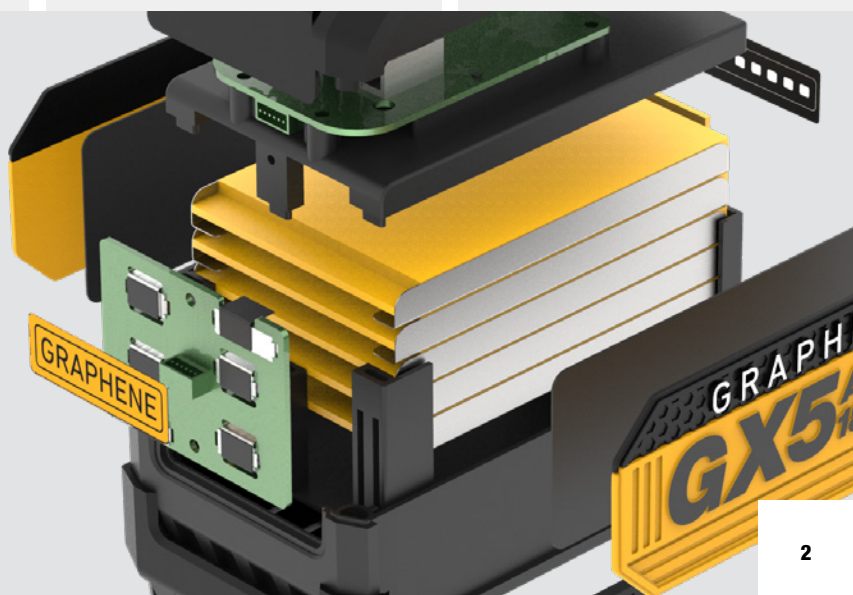

# SLIDE STACK

STORAGE TECH



## TRANSPORT. PROTECT. ORGANIZE.

**Tools are your livelihood.** Cat Slide Lock modular storage system brings organization to the job site! Engineered with impact resistant materials these kits withstand the toughest jobsite conditions. The innovative locking technology connects kits quickly for easy transport.



### ENGINEERED TO CONNECT & PROTECT



SLIDE LOCK CONNECTION



HEAVY DUTY LATCHES



IMPACT RESISTANT MATERIAL



DUST AND WATER RESISTANT



**18V** LI-ION

CORDLESS

# DRILLS

CORDLESS

# 18V

**DX13**

**CORDLESS 18V 1/2IN BRUSHLESS HAMMER DRILL**

1239017



**NEW GRAPHENE** Battery technology delivers 4x longer life, faster charging, and more power

700 IN/LBS of torque

Drives 0-8,800/0-35,200bpm

Removeable, lock-on auxiliary handle Slide Slock case for a stackable storage solution

Compatible with the CAT 1 FOR ALL 18V Platform



2-speed all metal gear box

## SPECIFICATIONS

Voltage	<b>18V</b>	Max cutting capacity	<b>Wood 2-5/32"</b>
Chuck size	<b>1/2"</b>		<b>Metal 1/2"</b>
No load speed	<b>0-550/0-2,200 rpm</b>		<b>Masonry 5/8"</b>
Impact rate	<b>0-8,800/0-32,000 bpm</b>		

## INCLUDED

<b>5.0Ah Graphene battery pack</b>	<b>Auxiliary handle</b>
<b>15A charger</b>	<b>Slide Lock storage case</b>
<b>Belt clip</b>	

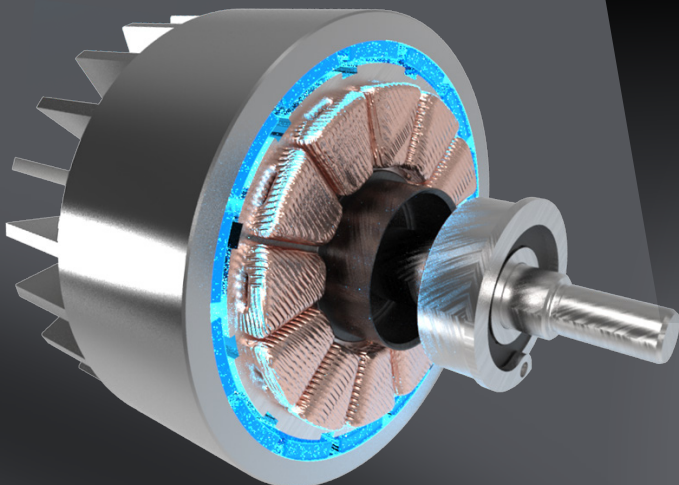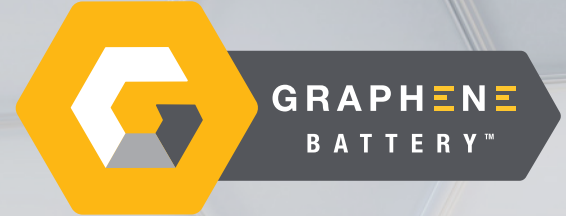

**BRUSHLESS™  
MOTOR**

**10x**

LONGER  
LIFE

**25%**

MORE  
POWER

**50%**

MORE  
RUNTIME

# DX11

## CORDLESS 18V 1/2IN BRUSHLESS DRILL DRIVER

1239015



600 IN/LBS of torque

2-speed all metal gear box

Textured over mold grip increases user comfort

Variable speed trigger provides greater user control

Compatible with the CAT 1 FOR ALL 18V Platform

### SPECIFICATIONS

Voltage	<b>18V</b>	Max torque	<b>600 in/lbs</b>
Chuck size	<b>1/2" keyless metal chuck</b>	Max drilling capacity	<b>wood 1-5/8"</b>
No load speed	<b>0-600/0-2,000 rpm</b>		<b>metal 1/2"</b>

### INCLUDED

<b>(2) 2.0Ah Li-ion batteries</b>	<b>Belt clip</b>
<b>4A charger</b>	<b>Slide Lock storage case</b>



# DX12

## CORDLESS 18V 1/2IN BRUSHLESS HAMMER DRILL

1239016



600 IN/LBS of torque

2-speed all metal gear box

Textured over mold grip increases users comfort

Compatible with the CAT 1 FOR ALL 18V Platform

Drives 0-8,000/0-32,000bpm for a variety of concrete and masonry applications

### SPECIFICATIONS

Voltage	<b>18V</b>	Max torque	<b>600 in/lbs</b>
Chuck size	<b>1/2" keyless metal chuck</b>	Max drilling capacity	<b>Wood 1-5/8"</b>
No load speed	<b>0-600/0-2,000 rpm</b>		<b>Metal 1/2"</b>
Impact rate	<b>0-8,000/0-32,000 bpm</b>		<b>Masonry 5/8"</b>

### INCLUDED

<b>(2) 2.0Ah Li-ion batteries</b>	<b>Belt clip</b>
<b>4A charger</b>	<b>Slide Lock storage case</b>





## DX12K

### CORDLESS 18V BRUSHLESS 1/4IN IMPACT DRIVER & 1/2IN HAMMER DRILL KIT

1239173



#### DX12

2-speed all metal gear box

Textured over-mold grip increases user comfort

Compatible with the CAT 1 FOR ALL 18V Platform

#### DX71

3-speed gear box

Textured over mold grip increases users comfort

Compatible with the CAT 1 FOR ALL 18V Platform

#### SPECIFICATIONS

DX12		DX71	
Voltage	18V	Voltage	18V
Chuck size	1/2" keyless metal chuck	Chuck size	1/4" hex
No load speed	0-600/0-2,000 rpm	No load speed	0-1,300/2,100/3,200 rpm
Impact rate	0-8,000/0-32,000 bpm	Impact rate	0-1,600/2,900/3,600 bpm
Max torque	600 in/lbs	Max Torque	1,900 in/lbs

#### INCLUDED

(2) 2.0Ah Li-ion batteries

4A charger

(2) Belt clips

Slide Lock storage case





# DX21

## CORDLESS 18V BRUSHLESS SDS-PLUS ROTARY HAMMER

1239307



2.2 Joules (1.6 FT/LBS) of impact energy

360° side handle with depth gauge

5 functions; Drill, Hammer Drill, Chisel, Bit Rotation and Impulse tile drilling

Anti-vibration design to reduce user fatigue

Mechanical and automatic electronic dual safety clutch system providing maximum protection

Textured over mold grip increases users comfort

Compatible with the CAT 1 FOR ALL 18V Platform

### SPECIFICATIONS

Voltage	18V	Max torque	2.2 Joules (1.6 ft/lbs)
Chuck size	1" SDS Plus	Max drilling capacity	Wood 1-1/4"
No load speed	0-1,210 rpm		Steel 1/2"
Impact rate	0-5,400 bpm		Concrete 1"

### INCLUDED

4.0Ah Li-ion battery

4A charger

Auxiliary handle

Depth gauge

Slide Lock storage case



## SAWS/SANDERS

18V

**DX532**

CORDLESS 18V 7-1/4 IN BRUSHLESS CIRCULAR SAW

1265004



Magnesium base and upper and lower guard for light weight design

7-1/4" thin kerf blade optimizes performance for faster more efficient cutting

Beveltrack technology improves accuracy when cutting a variety of angles

0-56° bevel capacity

Advanced overload protection and electronic brake

Textured over mold grip increases users comfort

Spindle lock and hex key storage for fast blade changes

## SPECIFICATIONS

Voltage	<b>18V</b>	Bevel capacity	<b>0-56°</b>
Blade size	<b>7-1/4"</b>	Max cutting capacity	<b>45° 1-3/16"</b>
No load speed	<b>5,500 rpm</b>		<b>90° 2-9/16"</b>

## INCLUDED

<b>(2) 4.0Ah Li-ion batteries</b>	<b>Rafter hook</b>
<b>4A charger</b>	<b>24T TCT blade</b>
<b>Hex key</b>	<b>Parallel guide</b>
<b>Vacuum adapter</b>	



# DX41B

## CORDLESS 18V BRUSHLESS OSCILLATING TOOL

1280007



Multi-tool can be used for Cutting, detailing, or sanding

Battery and charger not included

Textured over mold grip increases users comfort

Tool-free universal attachment system makes changing accessories quick and easy

Variable speed dial for precision control

### SPECIFICATIONS

Voltage	<b>18V</b>	No load speed	<b>8,000-19,000 rpm</b>
Oscillation angle	<b>4.0°</b>		

### INCLUDED

<b>1-3/8" Precise end cutting</b>	<b>Scraper blade</b>
<b>1-3/8" Bi-metal end cutting blade</b>	<b>Sanding base</b>
<b>3-1/8" HSS segment saw blade</b>	<b>(9) Sanding sheets (40#/ 80# /120#)</b>



# DX51B

## CORDLESS 18V BRUSHLESS JIGSAW

1280005



4-Position orbital action delivers precise cutting and control of cut

Tool-Free blade clamp accepts T-Shank blades for professional results

Tool-Free bevel base adjustment for 0-45° cutting left or right

Textured over mold grip increases users comfort

Battery and charger not included

Non-marring shoe cover to protect finished surfaces

### SPECIFICATIONS

Voltage	<b>18V</b>	Max cutting capacity	<b>Wood 4-3/4"</b>
Stroke length	<b>1"</b>		<b>Steel 25/64"</b>
No load speed	<b>0-3,500 rpm</b>		<b>PVC 25/32"</b>
Impact rate	<b>0-45°</b>		

### INCLUDED

<b>Blade for wood</b>	<b>Base cover</b>
<b>Dust adapter</b>	<b>Parallel guide</b>





## DX52

### CORDLESS 18V BRUSHLESS RECIPROCATING SAW

1270210



4.0 Ah 18V Lithium Ion battery that communicates with the tool for ultimate performance

Orbital action function facilitates aggressive cutting

Textured over mold grip increases users comfort

Tool Free adjustable shoe

Tool Free blade clamp

Compatible with the CAT 1 FOR ALL 18V Platform

#### SPECIFICATIONS

Voltage	18V	Max cutting capacity	Wood 11-3/4"
Stroke length	1-3/16"		Steel sheet 1/2"
No load speed	0-3,000 rpm		

#### INCLUDED

Blade for wood

4.0Ah Li-ion battery

4A Charger

Slide Lock storage case



## DX42B

### CORDLESS 18V BRUSHLESS PALM SANDER

1262005



2-in-1 function: random orbit sander or polisher

Dust sealed ON/OFF switch with brake function

Universal hook & loop system allows for easy sandpaper installation

Dust bag can be easily removed for emptying or to connect sander to dust collection system

Compatible with the CAT 1For All 18V Platform

Battery and charger not included

#### SPECIFICATIONS

Voltage	18V	No load speed	3000-11000 rpm
Base size	5" (for Sanding)	Orbital diameter	3/32"
	6" (for Polishing)		

#### INCLUDED

Dust bag

6" polishing foam pad

(3) Sanding papers (60#/80#/120#)



CORDLESS

# BATTERIES/CHARGERS

# 18V

## GXB5 18V 5.0AH GRAPHENE BATTERY

5350040

### 18V



GRAPHENE™



Slide pack design 100% compatible with all CAT 1 FOR ALL 18V cordless tools

On-board fuel gauge provides charge status

**NEW GRAPHENE** Battery technology delivers 4x longer life, faster charging, and extreme low temperature operation

4X Faster charging speed, with 15A charger (DXC15) Graphene battery fully charges within 20 minutes.

### SPECIFICATIONS

Voltage	18V	Watt hour	90
Battery capacity	5.0Ah		



GRAPHENE BATTERY™



## DXB2

### 18V 2.0AH LI-ION BATTERY

5350039

18V



Slide pack design 100% compatible with all CAT **1 FOR ALL** 18V cordless tools

On-board fuel gauge provides charge status

Communication technology allows battery and tool to talk providing maximum performance

BMS (battery management system) communicates with tool to provide maximum performance

#### SPECIFICATIONS

Voltage	18V	Watt hour	36
Battery capacity	2.0Ah		



## DXB4

### 18V 4.0AH LI-ION BATTERY

5350038

18V



Slide pack design 100% compatible with all CAT **1 FOR ALL** 18V cordless tools

On-board fuel gauge provides charge status

Communication technology allows battery and tool to talk providing maximum performance

BMS (battery management system) communicates with tool to provide maximum performance

#### SPECIFICATIONS

Voltage	18V	Battery capacity	72
Battery capacity	4.0Ah		



## DXC4

### 18V 4A QUICK CHARGER

5350039

Charging diagnostics provides battery state of health and charge indication

CMS (Charge Management System) intelligently identifies each battery pack to provide the fastest charge time

Pre-charging with lower current when the battery is on low voltage

#### SPECIFICATIONS

Voltage	<b>120V~60Hz</b>	Input power	<b>95W</b>
Output voltage	<b>20V</b>	Charge current	<b>4A</b>



## DXB4

### 18V 4.0AH LI-ION BATTERY

5350038

Charging diagnostics provides battery state of health and charge indication

CMS (Charge Management System) intelligently identifies each battery pack to provide the fastest charge time

Pre-charging with lower current when the battery is on low voltage

#### SPECIFICATIONS

Voltage	<b>120V~60Hz</b>	Input power	<b>380W</b>
Output voltage	<b>20V</b>	Charge current	<b>4A (DXB2)</b>
			<b>8.0A (DXB4)</b>
			<b>15A (EXB5)</b>





CORDED



CORDED

# DRILLS

## DX161U

### CORDED 8.5A 1/2IN HAMMER DRILL

1240002



**1/2 in.**  
CHUCK



**VARIABLE SPEED**  
WITH REVERSE



**3000**  
RPM



**10**  
FT



**8.5 AMP**

Aluminum gear box delivers the ultimate durability for the toughest applications

Rubber over-mold grip with 360° side handle with depth gauge

Lock-on switch for continuous use

Extra-long 10ft. trade-length power cord

### SPECIFICATIONS

Rated Power	<b>8.5A</b>	Drilling capacity	<b>masonry 3/4"</b>
Chuck size	<b>1/2" Heavy duty metal chuck</b>		<b>metal 1/2"</b>
No load speed	<b>0-3,000rpm</b>		<b>wood 1-3/8"</b>
Impact rate	<b>0-48,000bpm</b>		

### INCLUDED

<b>Depth gauge</b>	<b>Auxiliary handle</b>
--------------------	-------------------------



# DX26U

## CORDED 1IN SDS-PLUS ROTARY HAMMER

1239600



Select from 4 versatile functions to Drill, Hammer Drill, Bit Rotation and Chisel

Swiveling ball joint cord connection for ease of mobility and prolonged cord life

Lock-on switch for continuous use

Extra-long 10ft. trade-length power cord

Rubber over-mold grip with 360° side handle with depth gauge

### SPECIFICATIONS

Rated power	<b>8A</b>	Impact energy	<b>3 Joules (2 ft-lbs)</b>
Chuck Type	<b>1" SDS-Plus</b>	Drilling capacity	<b>Masonry 1"</b>
No-load Speed	<b>0-1,200/min</b>		<b>Metal 1/2"</b>
Impact Rate	<b>0-5,300BPM</b>		<b>Wood 1-3/16"</b>

### INCLUDED

Auxiliary handle

Dust cover

Depth gauge

BMC case

# DX27U

## CORDED 1-1/4IN SDS-PLUS ROTARY HAMMER

1239601



Select from 4 versatile functions to Drill, Hammer Drill, Bit Rotation and Chisel

Rubber over-mold grip with 360° side handle with depth gauge

Lightweight aluminum gear box delivers the ultimate durability for the toughest applications

Swiveling ball joint cord connection for ease of mobility and prolonged cord life

Anti-vibration design to maximize users' comfort

Extra-long 10ft. trade-length power cord

Lock-on switch for continuous use

### SPECIFICATIONS

Rated power	<b>12.5A</b>	Impact energy	<b>5 Joules (3.7 ft-lbs)</b>
Chuck Type	<b>SDS-Plus</b>	Drilling capacity	<b>Masonry 1-1/4"</b>
No-load Speed	<b>0-3,700/min</b>		<b>Metal 1/2"</b>
Impact Rate	<b>0-3,700BPM</b>		<b>Wood 1-1/2"</b>

### INCLUDED

Auxiliary handle

Dust cover

Depth gauge

BMC case

CORDED

# SAWS/SANDERS

## DX57

### CORDED 7A JIG SAW

1268601



Lock-on switch for continuous operation

4-Position orbital action

Lightweight aluminum gear box delivers the ultimate durability for the toughest applications

Tool-less blade clamp

Tool-less left-to-right beveling base adjustment allows the user to cut up to 45°

Rubber over-mold grip increases users' comfort and control

Extra-long 10ft. trade-length power cord

### SPECIFICATIONS

Voltage	7A	Bevel capacity	0-45°
No load speed	800-3,000/spm	Cutting capacity	Wood 4"
Bevel capacity	0-45°		Aluminum 1"
			Steel 3/8"

### INCLUDED

Vacuum adapter	Wood cutting blade
Parallel guide	



# DX49U

## CORDED 3.5A OSCILLATING MULTI-TOOL

1281864



Powerful 3.5A motor delivers variable speed from 11,000-20,000 OPM to provide optimal control in any application

Slide on/off switch for continuous operation

Lightweight aluminum gear box delivers the ultimate durability for the toughest applications

Tool-free universal attachment system makes changing accessories quick and easy

Rubber over-mold grip increases users' comfort and control

Extra-long 10ft. trade-length power cord

### SPECIFICATIONS

Rated power	<b>3.5A</b>	Oscillations angle	<b>3.2°</b>
No-load speed	<b>11,000-20,000 OPM</b>		

### INCLUDED

<b>1-3/8" Precise end cutting blade</b>	<b>Sanding base</b>
<b>1-3/8" Bi-metal end cutting blade</b>	<b>Sanding sheets (40#/ 80# /120# )</b>
<b>3-1/8" HSS segment saw blade</b>	<b>Slide Lock storage case</b>
<b>Scraper blade</b>	



# DX58U

## CORDED 12A RECIPROCATING SAW

1270002



Powerful 12A motor delivers 2,800spm to provide optimal control in any application

4 stage orbital action provides fast and aggressive cutting

Lightweight aluminum gear box delivers the ultimate durability for the toughest applications

Tool-free blade clamp

Tool Free Shoe Adjustment

Extra-long 10ft. trade-length power cord

### SPECIFICATIONS

Rated power	<b>12A</b>	Cutting capacity	<b>Wood 11-3/4"</b>
No-load speed	<b>0-2,800 SPM</b>		<b>Steel sheet 1/2"</b>
Stroke length	<b>1-3/16"</b>		

### INCLUDED

<b>Wood cutting blade</b>	<b>Rafter hook</b>
---------------------------	--------------------





## DX361U

### CORDED 13A 5IN ANGLE GRINDER

1250002



5in.



10000  
RPM



10  
FT



13AMP

Powerful 13A motor delivers 10,000RPM for tough grinding and cutting applications

Soft start function to ensure smooth start-ups

Spindle lock for disc and accessory changes

2 position anti-vibration auxiliary handle design to maximize users' comfort

Advanced ventilation system

Rubber over-mold grip increases users' comfort and control

Innovative on-board storage for spanner wrench in auxiliary handle

Extra-long 10ft. trade-length power cord

#### SPECIFICATIONS

Rated power	13A	No-load speed	10,000/min
Disc size	5in		

#### INCLUDED

Anti-vibration auxiliary handle	Quick change grinding guard
Spanner wrench	Quick change cutting guard
5" Grinding wheel	



## DX36U

### CORDED 7A 4.5IN ANGLE GRINDER

1250001



4.5in.



12000  
RPM



10  
FT



7AMP

Powerful 7A motor delivers 12,000RPM for tough applications

Slim body design for reduced user fatigue and improved control

Slide on/off switch for continuous operation with accidental start protection

Spindle lock for disc and accessory changes

2 position anti-vibration auxiliary handle designed to maximize users' comfort

Advanced ventilation system

Detachable grating system protects from debris damage

Innovative on-board storage for spanner wrench in auxiliary handle

Extra-long 10ft. trade-length power cord

#### SPECIFICATIONS

Rated power	7A	No-load speed	12,000/min
Disc size	4.5in		

#### INCLUDED

Anti-vibration auxiliary handle	Quick change grinding guard
Spanner wrench	
4.5" Grinding wheel	

# DX48U

## CORDED 8.5A BELT SANDER

1262800



Powerful 8.5A motor delivers variable speed control from 790-1,150SFPM so you can match the speed to the desired material removal rate

Lock-on switch for continuous operation

Rubber over-mold grip

Belt centering system adjustment

Dust Collection System to keep your material clear of debris

Quick release belt change lever to quickly remove/install sanding belts

Extra-long 10ft. trade-length power cord

### SPECIFICATIONS

Rated power	<b>8.5A</b>	Belt size	<b>3"x21"</b>
No-load speed	<b>790-1150 SFPM</b>		

### INCLUDED

<b>Dust bag</b>	<b>3" x21" Sanding belt</b>
-----------------	-----------------------------



# DX47U

## CORDED 2.4A 1/4 SHEET SANDER

1262303



Powerful 2.4A motor delivers 14,000OPM for smooth sanding leaving a superior finish

Dust sealed ON/OFF switch

Hook & loop quick clamp system allows for easy sandpaper installation

CDS™ (Cyclonic Dust/Air Separator) effectively separates dust from the air and maintains constant suction, No bag = No loss of air suction

Swiveling ball joint cord connection for ease of mobility and prolonged cord life

Extra-long 10 FT. trade-length power cord

### SPECIFICATIONS

Rated power	<b>2.4A</b>	Orbital diameter	<b>1/16"</b>
No-load speed	<b>14000 OPM</b>		

### INCLUDED

<b>80 grit sanding paper</b>	<b>Paper punch</b>
<b>Cyclone bin</b>	<b>Vacuum adapter</b>



# DX46U

## CORDED 3A 5IN RANDOM ORBIT SANDER

1262004

  
**14000**  
O P M

  
**10**  
FT

  
**3 AMP**

  
**CDS**



Powerful 3A motor delivers variable speed control from 5,000-14,000OPM for smooth finish sanding

Rubber over-mold grip increases users' comfort and control

Dust sealed ON/OFF switch for continuous operation with brake function

Swiveling ball joint cord connection for ease of mobility and prolonged cord life

Universal hook & loop system allows for easy sandpaper installation

Extra-long 10ft. trade-length power cord

CDS™ (Cyclonic Dust/Air Separator) effectively separates dust from the air and maintains constant suction, No bag = No loss of air suction

### SPECIFICATIONS

Rated power	<b>3A</b>	No-load speed	<b>5000-14000/min</b>
Base diameter	<b>5in</b>		

### INCLUDED

<b>Cyclone bin</b>	<b>Vacuum adapter</b>
<b>80 grit clamp sanding paper</b>	

