



CUSTOMER SUPPORT

KEY:

For assistance or replacement parts, please contact Prevue Pet Products:

PHONE 1 (312) 243-3624

ONLINE www.prevuepet.com

EMAIL customerservice@prevuepet.com

B = Back panels

R = Roof grille

C = Casters

LS = Left Side panels F = Front panels

RS = Right Side panels

HARDWARE INCLUDED:



Phillips-head screws 30 pcs (installed in place on cage panels) *



Hex screws 4 pcs (installed in place on playtop supports)



Knobs 4 pcs (installed in place on cage & playtop bar)



Casters 4 pcs

* (plus 2 bagged extras)

TOOLS INCLUDED:


Allen wrench



TOOLS NOT INCLUDED:

Phillips-head screwdriver



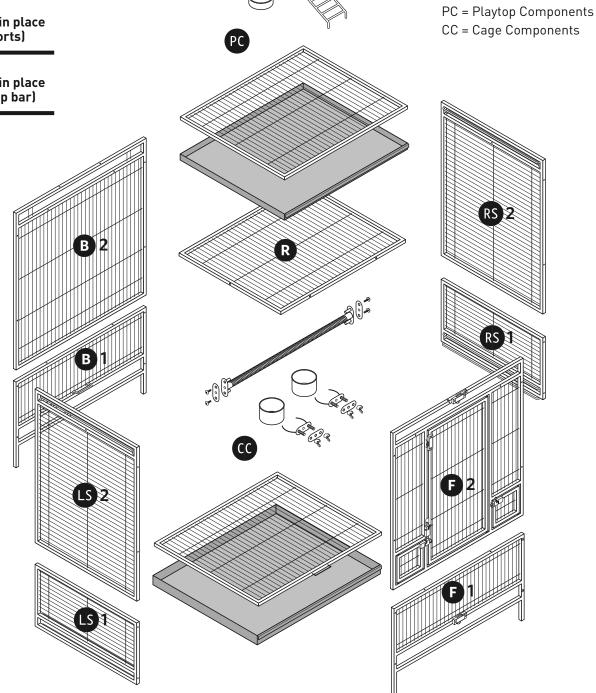



Instructions online at www.prevuepet.com

CUSTOMER SUPPORT

For assistance or replacement parts, please contact Prevue Pet Products:

PHONE 1 (312) 243-3624

ONLINE www.prevuepet.com

EMAIL customerservice@prevuepet.com

TOOLS NEEDED : Phillips head screwdriver • For best results, follow Assembly Steps in order presented.

KEY:

B = Back panels LS = Left side panels


panels
F = Front panels
RS = Right side
panels

R = Roof grille C = Casters PC = Playtop

Components CC = Cage

CC = Cage Components


PIECES

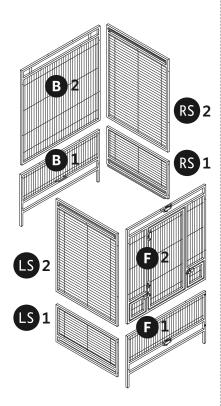




*

Screws are installed in place. When attaching panels or components, back the screw out, match up the components, and reinsert to attach.

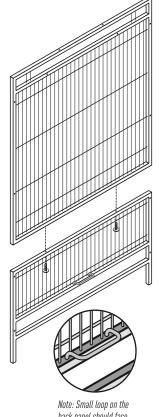


Note: Small loop on the back panel should face the interior. This loop helps hold the bottom grille in place.





Back the Phillips-head screws out, align the **upper panel** with the **lower panel** and retighten the screws to attach.

Grille/tray tracks on all side panels should be on the same side, facing the interior.




PIECES




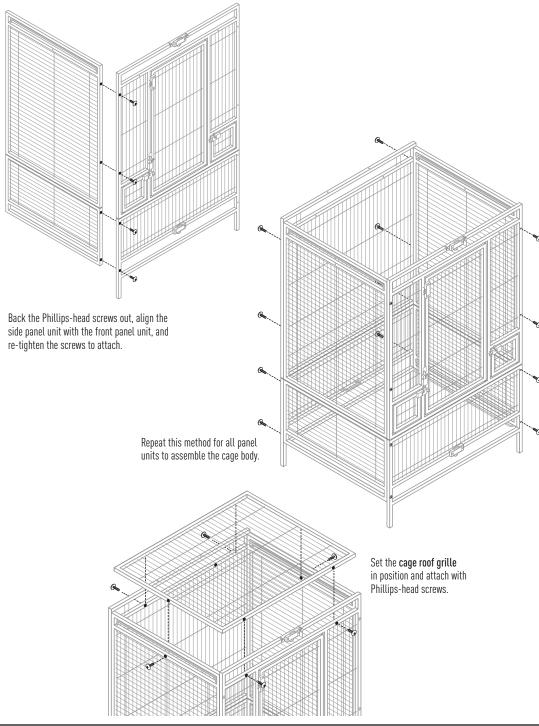




them at this time.

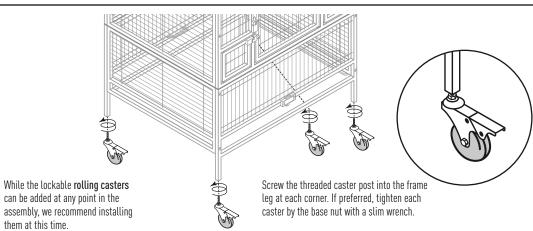




Perch:

Hold the perch in place in the cage interior. Install a Phillips-head screw through the bracket, through the cage wire, into the perch bracket and tighten with a Phillips screwdriver for all four screws.






Open the cup door.

Insert the screw posts on the cup holder through the door mesh, add the bracket on the outside, and tighten to the doors with the wing nuts.

Place the deep cups into the holders.

Grille and tray: Open the grille lock. Slide the grille (with handle) into the top channel and the deep tray into the bottom channel.

PIECES




Remove the hex screws from the ends of the perch bar supports. Install the **perch bar** supports on the back panel of the cage.

Back the Phillips-head screws out on the underside of the perch bar and attach the cup holders.



screws and the allen wrench. Insert the shallow cups. Open the grille lock. Slide the thin grille into the top channel and the **shallow tray** into the bottom channel.



Loosen the knob screws on the perch bar rail and along the cage front. Insert the ladder and re-tighten the knob screws.

Attach the perch bar to the support rails using the hex



When fully assembled, check and tighten ALL screws and wing nuts over the entire cage to ensure a safe and stable home.

Assembly completed.

