
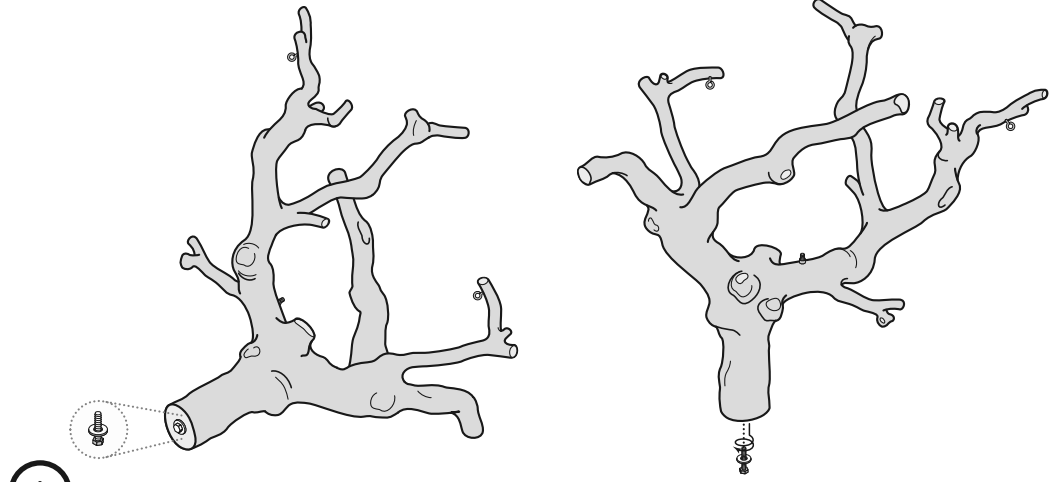



TOOL REQUIRED: Crescent Wrench or Socket Wrench with 1/2" (12 mm) Socket • For best results, follow Steps in order.


## 1 PIECES



**\*** Your hardware pieces (bolt & washer) are installed in the base of the crown.


With a crescent wrench or socket wrench with 1/2" (12 mm) socket, completely remove the bolt and washer from the base of the crown.

## 2 PIECES



Keep the washer on the bolt.

- From the bottom of the stand, push the bolt/washer up, through the hole, and into the threaded hole in the base of the crown.

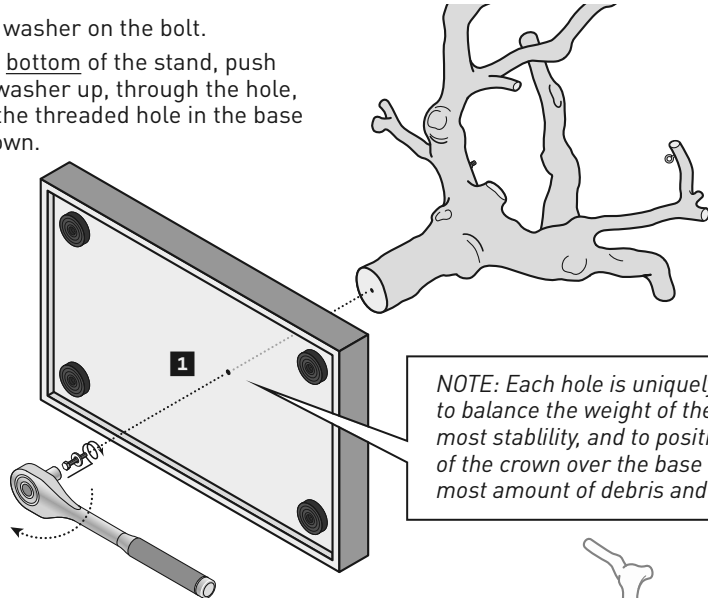


*NOTE: Each hole is uniquely positioned to balance the weight of the crown for the most stability, and to position the shape of the crown over the base to control the most amount of debris and litter.*

Hand tighten to get the bolt attachment started. Finish tightening with the socket or crescent wrench.

**\*** Tighten only to the point of being snug. Overtightening may damage the integrity of the base wood.

- Finish the assembly by screwing the food/water cup onto the pre-installed post. Tighten until snug. Do not overtighten, as it may weaken the cup base.

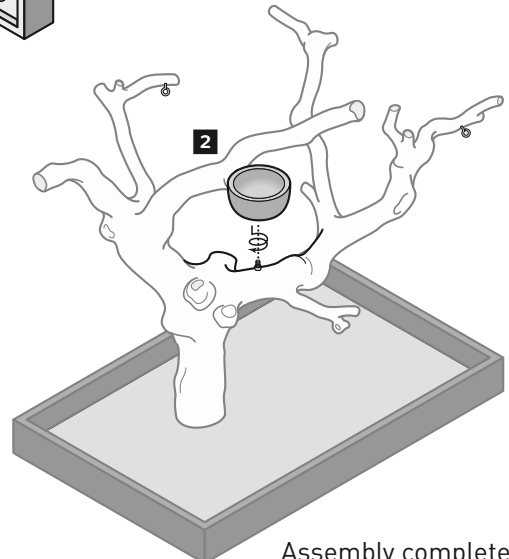

Assembly completed. ■