
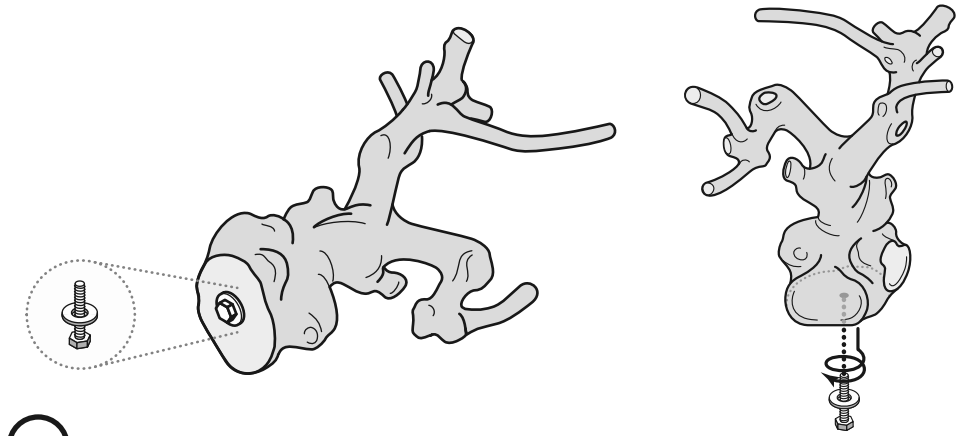


TOOL REQUIRED: Crescent Wrench or Socket Wrench with 1/2" (12 mm) Socket • For best results, follow Steps in order.

# 1


PIECES

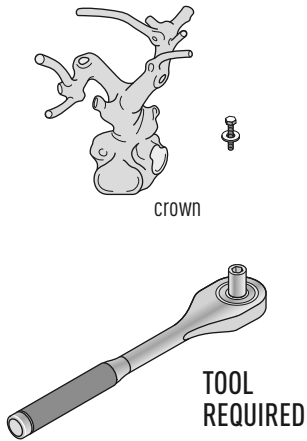

With a crescent wrench or socket wrench with 1/2" (12 mm) socket, completely remove the bolt and washer from the base of the crown.

# 2


PIECES



Keep the washer on the bolt.

From the bottom of the stand, push the bolt/washer up, through the hole, and into the threaded hole in the base of the crown.

Hand tighten to get the bolt attachment started. Finish tightening with the socket or crescent wrench.

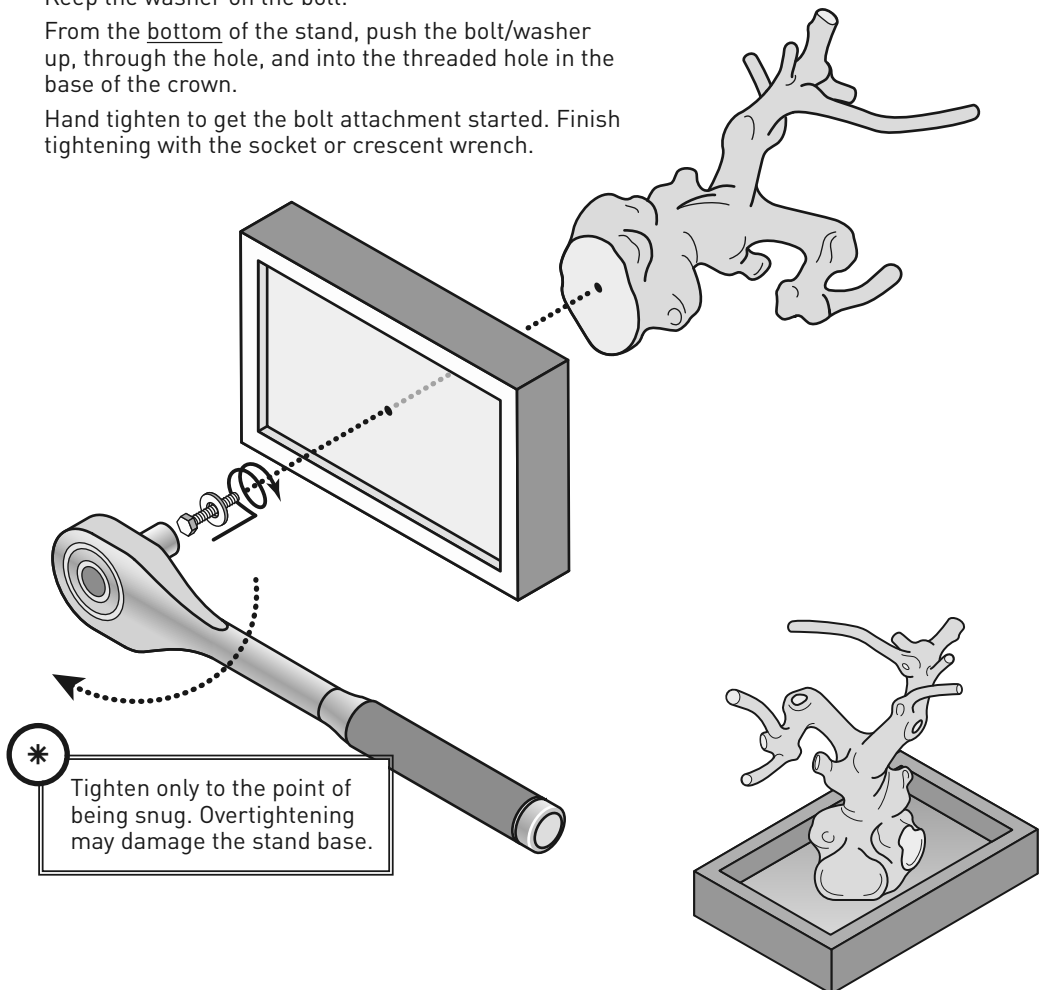

Assembly completed. ■