INSTRUCTION MANUAL

AIR 75

AIR 76







- Firmly secure all bolts, screws and knobs before use.
- Reconfirm that all bolts, screws, and knobs are secure every 90 days.
- Fasten screws loosely during initial assembly. Do not fully tighten screws until the item is completely assembled.
- Do not use or store this item in the proximity of open flame or flammable/combustible chemicals.
- Be aware that some parts are heavy and have sharp edges.
- Be aware that moving parts can injure, crush and cut.
- If any parts are missing, broken, damaged, or worn, stop using this product until repairs are made and/or factory replacement parts are installed.
- Do not use this item in a way inconsistent with the manufacturer's instructions as this could void the product warranty.

TOOLS REQUIRED









PHILLIPS SCREWDRIVER

DRILL (RECOMMENDED)

2PERSON **ASSEMBLY**

APPROXIMATELY 30MIN. ASSEMBLY

HARDWARE







M3.5x45mm SCREW 6PCS+1spare





M3.0x18mm SCREW 10PCS+1spare





M3.0x14mm SCREW 10PCS+1spare





M3.0x12mm SCREW 4PCS+1spare





Hinge 2PCS





Lock 1PC







PARTS





















PARTS














Attach the plastic feet Part M to the metal bars Part D & E with the buckle.

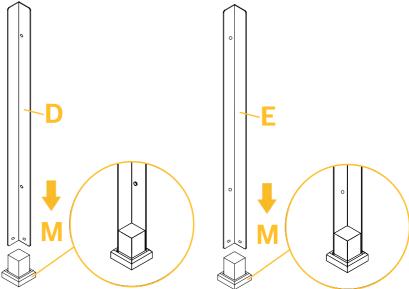


Attach the panel Part A, B, C with the metal bars Part D & E by 4xP1 screws.

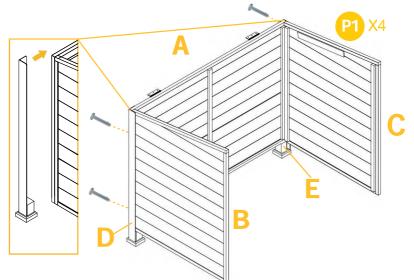

Attach the plastic feet Part M to the metal bars Part K & L with the buckle.

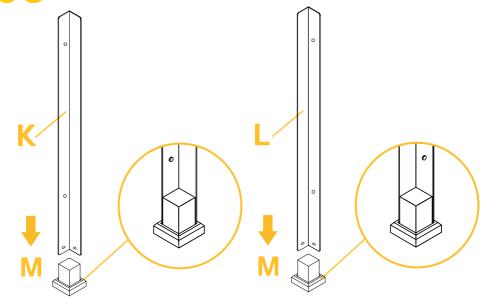


Screw the curtain Part J to the INSIDE of Part I by 4xP3 screws.



05


Attach the Part I to the house with the metal bars Part K & L by 4XP1 screws.

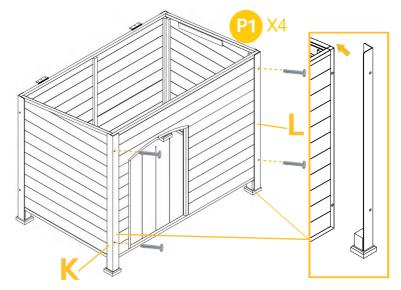


06

Attach the bottom pad Part G & F to the side of bottom floor Part H by 3XP2 screws.

Attach the bottom pad Part G to the side of bottom floor Part H by 1XP2 screws

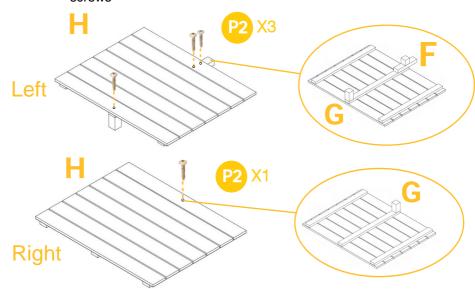


Put down the left bottom floor first, and then put down the right bottom floor, finally connect the bottom floor with bottom pad Part F by 2XP2 screws.

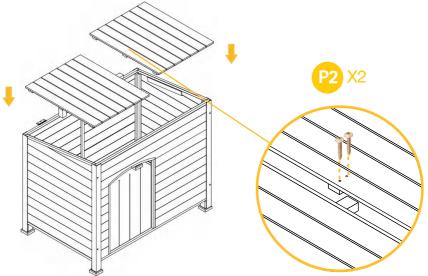


Screw the roof Part N on asphalt part from bottom by 6xP3 screws.

Notice: The roof edges of back are relatively flat, pls pay attention the

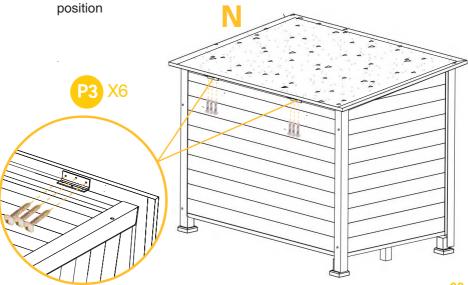


08

Screw the roof hinge P6, one side to the roof by 2xP4 screws, the other side to the side panel by 2xP4 screws in left and right sides.

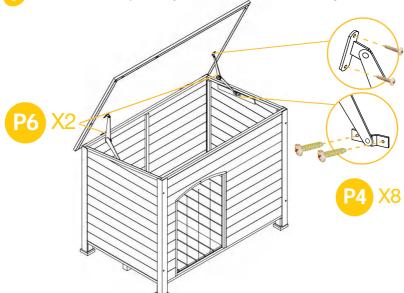

Screw the lock P7, screw one side to roof by 2xP4 screws, screw the other to front panel by 4xP5 screws.

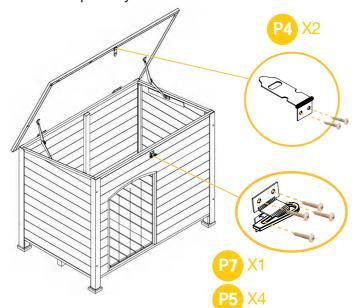

Complete.



Finish 10



WARNING

Manufacturer and seller expressly disclaim any and all liability for personal injury,property damage or loss,whether direct,indirect,or incidental,resulting from the incorrect attachment,improper use,inadequate miantenance,or neglect of this product.