

Thermoplastic, Lead Free

Shallow Well Jet Pumps

WPS05003K

1/2 HP

7.2 GPM

WPS07503K

3/4 нр

9.2 GPM



- Thermoplastic pump housing
- Premium performance at water depths up to 25'
- Heavy-duty, dual-voltage 115/230V motor
- Self-priming after pump housing is initially filled
- 30/50 pressure switch
- Preinstalled pressure gauge







Certified Lead Free to: NSF/ANSI/CAN 61 NSF/ANSI 372




Performance (GPM) at 40 PSI Discharge Pressure

		Depth to Water						Max	Voltore	Pressure switch	
Model No.	HP	0'	5'	10'	15'	20'	25'	pressure shutoff	Voltage	ON	0FF
WPS05003K	1/2	7.2	6.5	6.0	5.5	5.0	4.5	66 PSI	230/115	30	50
WPS07503K	3/4	9.2	9.0	8.1	7.4	6.8	5.8	67 PSI	230/115	30	50



Application The shallow well jet pump can pump v	water where the water is located less than 25 feet				
vertically from the pump.					
Voltage	115/230				
Hertz	60				
Phase	Single				
RPM	3450RPM				
Motor type	Permanent Split Capacitor (PSC)				
Insulation	Class B				
Circuit requirments	20/15 AMP				
Duty rating	Continuous*				
Shaft seal	Mechanical seal				
Motor Shaft	Stainless steel				
Upper motor bearing	Ball bearing				
Lower motor bearing	Ball bearing				
Cooling	Fan cooled				
Motor protection	Auto reset thermal overload protector				
Pump Specifications					
Discharge size	1" NPT				
Suction size	1" NPT				
Pump Housing	Cast iron				
Pump Base	Cast iron				
Diffuser	Reinforced thermoplastic				
Impeller material					
impolioi material	Reinforced thermoplastic				
Gasket	Reinforced thermoplastic Rubber				
<u> </u>	· ·				
Gasket Solids handling	Rubber				
Gasket Solids handling	Rubber 0" spherical				
Gasket Solids handling Liquid temp.range	Rubber 0" spherical 32°-95°F				
Gasket Solids handling Liquid temp.range Operation Fasteners	Rubber 0" spherical 32°-95°F Automatic Steel				
Gasket Solids handling Liquid temp.range Operation Fasteners	Rubber 0" spherical 32°-95°F Automatic Steel				
Gasket Solids handling Liquid temp.range Operation Fasteners Automatic Switch Spe	Rubber 0" spherical 32°-95°F Automatic Steel cifications				
Gasket Solids handling Liquid temp.range Operation Fasteners Automatic Switch Spe	Rubber 0" spherical 32°-95°F Automatic Steel Cifications Pressure Switch				

Performance

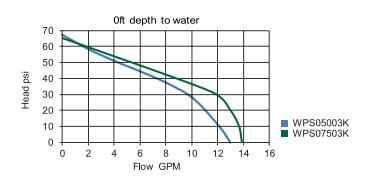

Performance at 40 PSI Discharge Pressure										
Model	HP	Amps	Depth to water	0'	5'	10'	15'	20'	25'	
WPS05003K	1/2	7/3.5A	GPM	7	6.5	6.0	5.5	5.0	4.5	
			GPH	432	390	360	330	300	270	
WPS07503K	3/4	8/4A	GPM	9.2	9	8.1	7.4	6.8	5.8	
			GPH	552	540	486	444	408	348	

Dimensions

