

Non-submersible Transfer Pumps

UTT01004K | **1/10 HP** | **360 GPH**



- Multi-purpose pump constructed of corrosion-resistant BRASS
- Drain water from boats, waterbeds, clogged sinks, aquariums, washing machines, stock tanks, utility sinks and more
- Oil-free motor is safe to use around fish and plants
- Includes suction hose, suction strainer, replacement impeller and brush
- See-through suction hose allows for easy monitoring of pump priming
- Removes water down to 1/8" with suction strainer
- 3/4" Garden hose threaded connection and 6' power cord




Performance

| Model No. | HP | Discharge Flow (GPH) | | | | | |
|------------------|------|----------------------|-----|-----|-----|-----|-----------|
| | | 0' | 10' | 20' | 30' | 40' | Max. lift |
| UTT01004K | 1/10 | 360 | 318 | 264 | 198 | 132 | 50' |

| Application | |
|---|---------------------------------------|
| The non-submersible transfer for general water transfer | |
| Voltage | 115 |
| Hertz | 60 |
| Phase | Single |
| RPM | N/A |
| Motor type | Single-phase series motor |
| Insulation | Class B |
| Circuit requirements | 10 AMP |
| Duty rating | Continuous* |
| Shaft seal | Lip seal (Rubber and Stainless steel) |
| Motor Shaft | Stainless steel |
| Upper motor bearing | Ball bearing |
| Lower motor bearing | Ball bearing |
| Cooling | Air cooled |
| Motor protection | Auto reset thermal overload protector |
| *For continuous, the pump is not allowed to run dry | |

| Pump Specifications | |
|---------------------|------------------------------|
| Discharge size | 3/4 in. garden hose threaded |
| Cord Length | 6' |
| Cord type | SJTW 18AWG/3C, UL list |
| Pump body | Brass |
| Impeller material | Rubber |
| Gasket | Seal paper |
| Solids handling | 0" spherical |
| Liquid temp.range | 32°-95°F |
| Operation | Non-Automatic |
| Fasteners | Stainless steel |
| Maximum flow rate | 6 GPM |
| Maximum head | 50 ft |

Performance

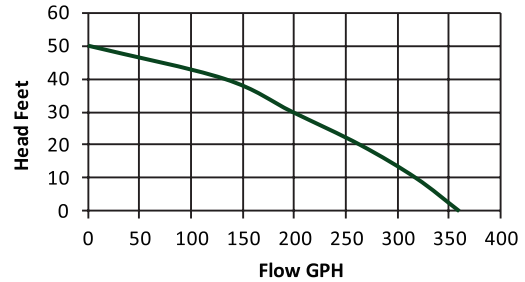

| Model | HP | Amps | Discharge Height(ft) | 0 | 10 | 20 | 30 | 40 | 50 |
|-------|----|------|----------------------|-----------|------|------|-----|-----|-----|
| | | | | UTT01004K | 1/10 | 1.8A | GPM | 6.0 | 5.3 |
| | | | GPH | 360 | 318 | 264 | 198 | 132 | 0 |

Dimensions

