

Superior Bond to Block, Stone & Timber

LANDSCAPE

Construction Adhesive

Titebond® PROvantage™ Landscape Construction Adhesive is specifically designed for use on pavers, retaining walls, stone, brick, block, wood and most common building materials used in landscaping. The professional strength formula is waterproof and works well in extreme weather conditions to provide a long lasting bond.

PROvantage VOC-Compliant Solvent

Prevents wall shifting

Extrudes 0°F to 100°F

Wet & frozen lumber

VOC-compliant

Repairs loose brick & stone

All weather

Durable bond

Waterproof

Recommended For


Installation of landscape materials for retaining walls, capstones, planters and walkways.

Specifications & Certifications

Exceeds the requirements of ASTM D3498, APA AFG-01 and ASTM C557.

Compatible Materials

Bonds common building materials including brick, stone, concrete, metal, wood, timber and slate.

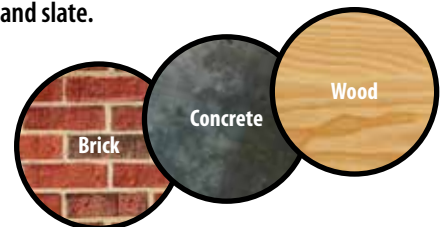

Titebond
THE PRO'S ADVANTAGE



Ordering/Sku Information

Size	Part Number	UPC	Case UPC	Weight	Units Per Package	Packages Per Pallet
10 Oz. Cartridge	3121	037083031218	10037083331215	11.73 lbs.	12	108
28 Oz. Cartridge	3122	037083031225	10037083031222	31.21 lbs.	12	44

Technical Information

- **Application Temperature:** 0°F to 100°F
- **Service Temperature:** -20°F to 120°F
- **Working Time:** Approximately 20 minutes for a 1/4" bead

Physical Properties

- **Type:** Proprietary synthetic polymer
- **State:** Thixotropic medium-viscosity mastic
- **Color:** Beige
- **Solids:** 65%
- **Viscosity:** 130,000 cps
- **VOC:** < 70 g/L
- **Weight/Gallon:** 10.5 lbs.
- **Flashpoint:** < 0°F
- **Freeze/Thaw Stability:** Will not freeze
- **Storage Life:** 18 months in tightly closed containers at 75°F
- **Odor:** Solvent (strong)

User Tips

Not designed for continuous submersion. Vertical applications must be braced for at least 3 days. When creating structures higher than 3 feet, consult block manufacturer for specific instructions. One surface must be porous. For use on plastics, contact Technical Service.

Directions

PREP: Surfaces must be clean and free of any material that may prevent adequate adhesion.

APPLICATION: Cut tip on slant for 1/4" to 3/8" bead. Puncture inner seal and place in cartridge gun. Apply adhesive to one of the surfaces in either a continuous or spot bead. Wet blocks must dry within 48 hours for adhesive to adhere properly. Retaining Wall Caps: Apply 1/4" to 3/8" bead around the perimeter of the underlying block 2" from edge. Press firmly in place to ensure adequate adhesive contact. Landscape Blocks: Apply two 1/4" beads of adhesive, front and back on each block. Press firmly in place to ensure adequate adhesive contact. Apply blocks to adhesive within 20 minutes when temperature is 70°F. If temperature is above 70°F, reduce time to 10 minutes or less. Allow at least 48 to 72 hours before foot traffic and 5 to 7 days for heavy traffic.

CLEANUP: Tools and adhesive may be cleaned with acetone or mineral spirits. Follow solvent vendor's precautions.

Coverage

Size	1/8" bead	1/4" bead	3/8" bead
10 Oz. Cartridge	129 ft.	30 ft.	14 ft.
28 Oz. Cartridge	355 ft.	86 ft.	39 ft.

PROvantage
VOC-Compliant Solvent

Visit Titebond.com for the most up-to-date product information.

Franklin International



Columbus, Ohio 43207 614.443.0241 Technical Service 1.800.347.4583 © 2019 01390_3789bcm FF1165

