

IMPORTANT NOTES, PLEASE READ.

MANUAL FILL OPTION



1) Fill bucket with water.


2) Snap waterer onto bucket.

**Start from front/trough, and work towards the rear until fully seated, or 'snapped on'. To remove, hold bucket with feet, pull up on trough.*

3) Flip bucket onto level surface.

**Hold handle in one hand, and the other on the bottom (opposite trough).*

HANDS-FREE OPTION

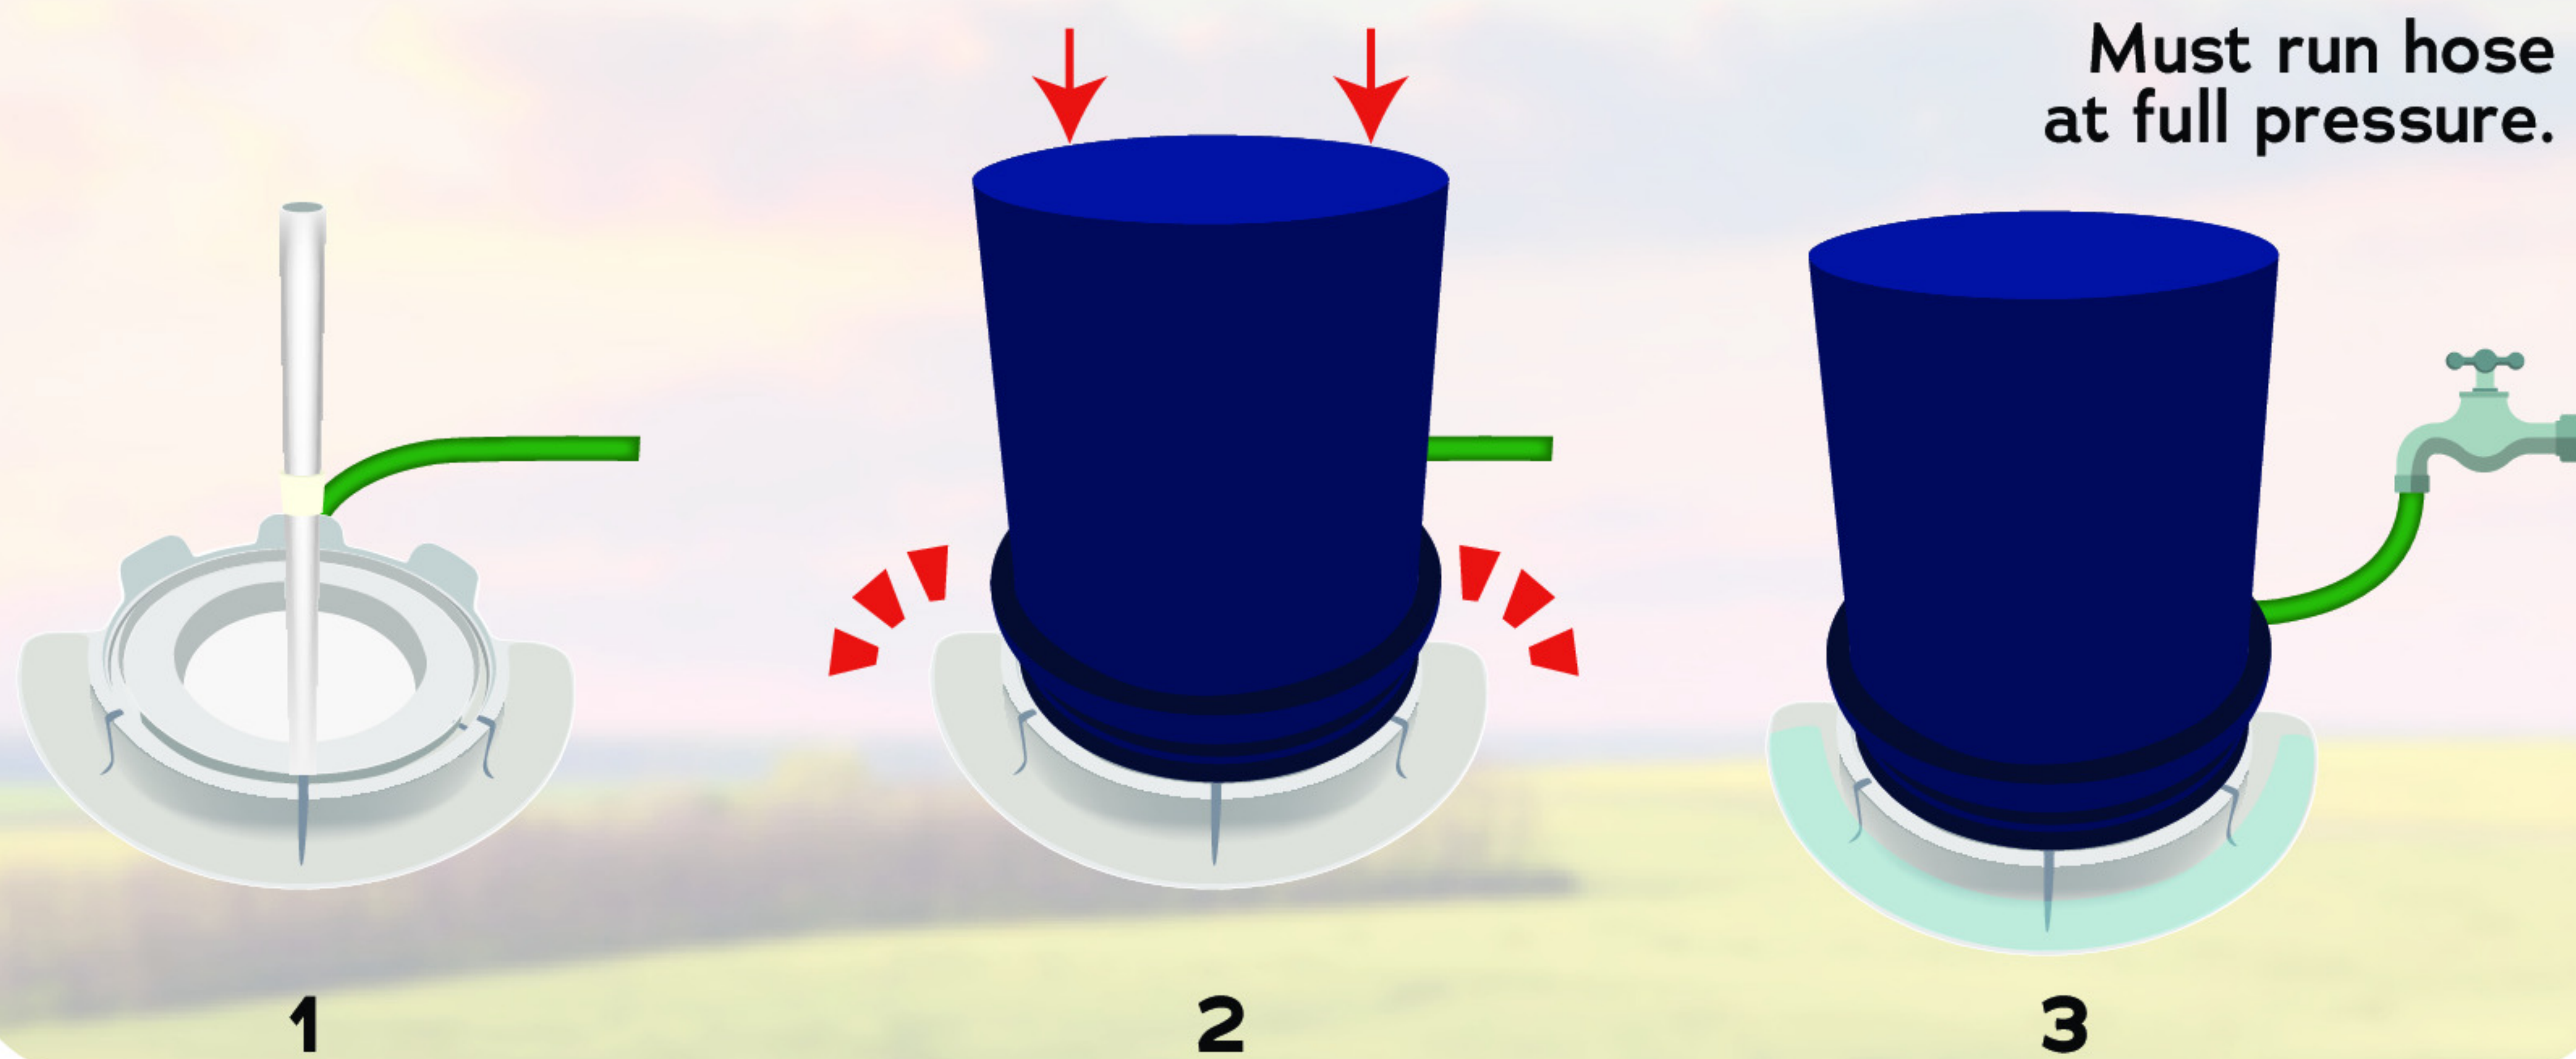

1) Attach hose & insert tube **FIRMLY**.

2) Attach waterer to bucket (see number 2 above)

3) Run water until bubbles stop.

INSTALLING



REMOVING



FLIPPING



HOW TO VIDEOS



★ VERY IMPORTANT NOTES ★

- * These waterers fit most 5-gallon buckets, but sizes may vary. If your bucket feels too loose or tight, try using a different one (check the manufacturer's name on the bottom).
- * When connecting to a hose, ensure full hose pressure (fully open) and install the inside vent tube. Water will overflow during filling (to "clean/refresh trough").
- * If connected directly to a hose, ensure there are no leaks whatsoever. This system must remain closed/airtight to maintain pressure and prevent failure or leaking.