

READ THIS FIRST



Model G0803Z
*****IMPORTANT UPDATE*****
 For Machines Mfd. Since 01/22
 and Owner's Manual Revised 05/20

For questions or help with this product contact Tech Support at (570) 546-9663 or techsupport@grizzly.com


The following change was made since the owner's manual was printed:

- The fence has changed to allow for adjustment of fence-to-table squareness and fence base tightness.

Aside from this information, all other content in the owner's manual applies and **MUST** be read and understood for your own safety. **IMPORTANT: Keep this update with the owner's manual for future reference.**

For questions or help, contact our Tech Support at (570) 546-9663 or techsupport@grizzly.com.

Revised Parts

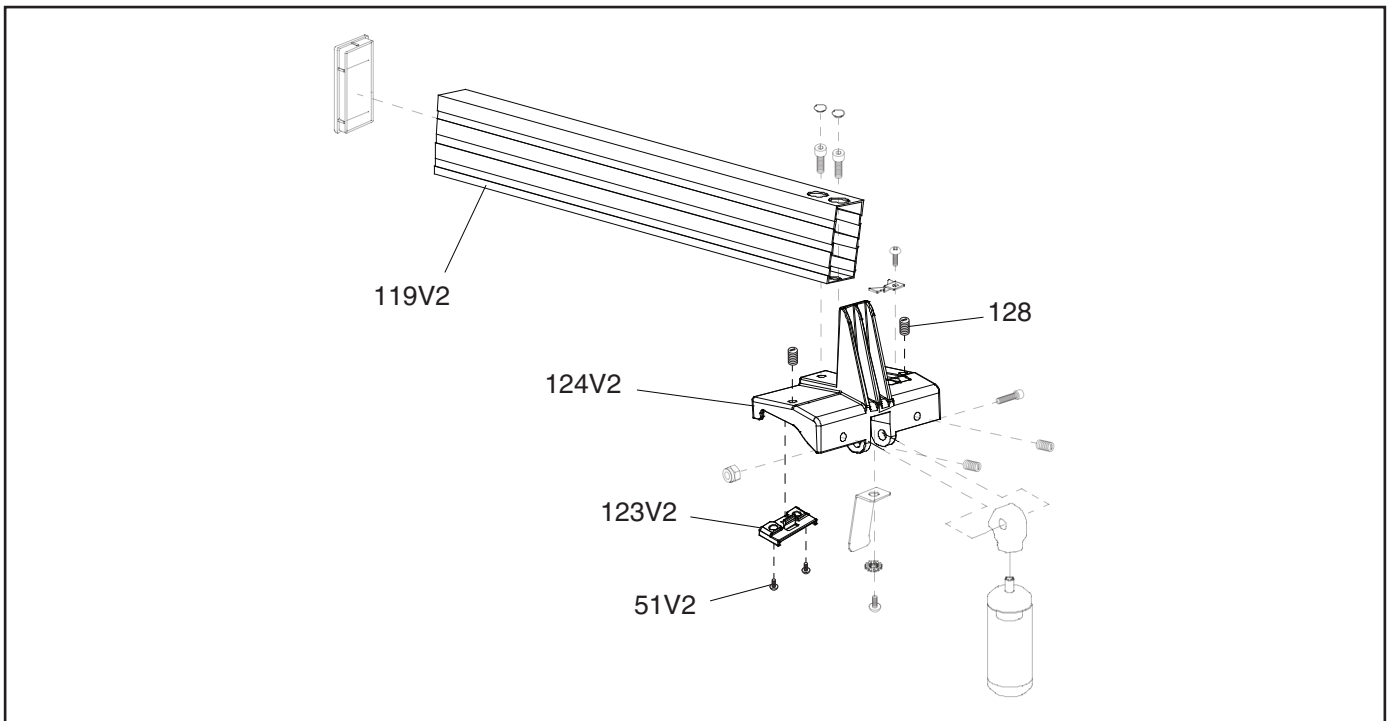

REF	PART #	DESCRIPTION
51V2	P0803Z051V2	PHLP HD SCR M4-.7 X 6 V2.01.22
119V2	P0803Z119V2	FENCE V2.01.22
123V2	P0803Z123V2	FENCE BASE CLIP V2.01.22

REF	PART #	DESCRIPTION
124V2	P0803Z124V2	FENCE BASE V2.01.22
128	P0803Z128	SET SCREW M6-1 X 8 SLOTTED



COPYRIGHT © JANUARY, 2022 BY GRIZZLY INDUSTRIAL, INC.
WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE OR FORM WITHOUT THE WRITTEN APPROVAL OF GRIZZLY INDUSTRIAL, INC.
 #CS22227 PRINTED IN CHINA

Adjusting Fence

The fence face must be square to the table in order to produce accurate cuts. The fence is adjustable with two slotted set screws where the fence sits on the front rail.

When the fence is secured on the rail with the fence handle, the fence should not move in order for a workpiece to be safely fed past the blade. If you notice any sloppiness or play in the fence when the fence handle has been tightened, adjust the fence base tightness.

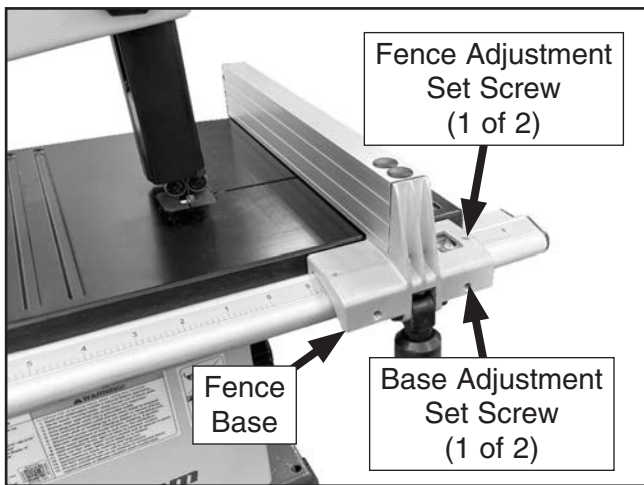


Figure 1. Location of fence and base adjustment components.

Fence-to-Table Squareness

Tools Needed	Qty
90° Square	1
Flat Head Screwdriver 1/8"	1

To adjust fence-to-table squareness:

1. DISCONNECT MACHINE FROM POWER!
2. Place square on table against face of fence (see **Figure 2**) to check if fence is square to table.
 - If fence *is* square to table, no adjustment is required.
 - If fence *is not* square to table, proceed to **Step 3**.

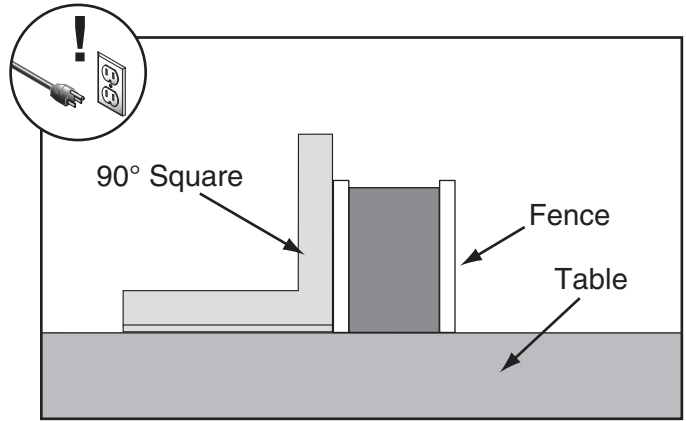


Figure 2. Example of checking fence squareness to table.

3. Adjust (2) fence adjustment set screws shown in **Figure 1** until fence is square to table.
4. Refer to **Aligning Fence on Page 3 of this update** to align fence to blade and miter slot before operating machine.

Fence Base Tightness

Tool Needed	Qty
Flat Head Screwdriver 1/8"	1
Phillips Head Screwdriver #2	1

To adjust fence base tightness:

1. DISCONNECT MACHINE FROM POWER!
2. Lock fence in place on rail and attempt to move fence base (see **Figure 1**).
 - If there *is not* movement, no adjustment is required.
 - If there *is* movement, proceed to **Step 3**.
3. Evenly tighten (2) base adjustment set screws shown in **Figure 1** until fence base does not move.

Note: *Tightening set screws too much may scratch fence rail.*

Note: *If you have tightened base adjustment set screws and there is still movement in fence base, tighten (4) Phillips head screws on underside of base.*



Aligning Fence

To ensure cutting accuracy, the fence should be aligned parallel to the blade. This is achieved by aligning the fence to the miter slot.

Note: Occasionally, even after aligning the fence, a symptom known as "blade lead" will develop, requiring the fence to be skewed slightly to compensate for the blade lead problem. Refer to **Blade Lead**, beginning on **Page 47** of the **Owner's Manual**, for more information on blade lead and skewing the fence.

Tools Needed	Qty
Flat Head Screwdriver 1/4"	1
Hex Wrench 5mm.....	1

To align fence:

1. DISCONNECT MACHINE FROM POWER!
2. Make sure table is aligned with blade (see **Adjusting Miter Slot Parallelism** on **Page 25** of **Owner's Manual** for instructions).
3. Make sure fence is square to table (see **Fence-to-Table Squareness** on **Page 2** of **this update**) for instructions).
4. Install fence on right side of blade, aligned with edge of miter slot, then lock it in place.

— If fence *is* parallel with miter slot, no adjustment is necessary.

—If fence *is not* parallel with miter slot, proceed to **Step 5**.

5. Remove (2) cover caps and loosen (2) fence adjustment cap screws (see **Figure 31**).

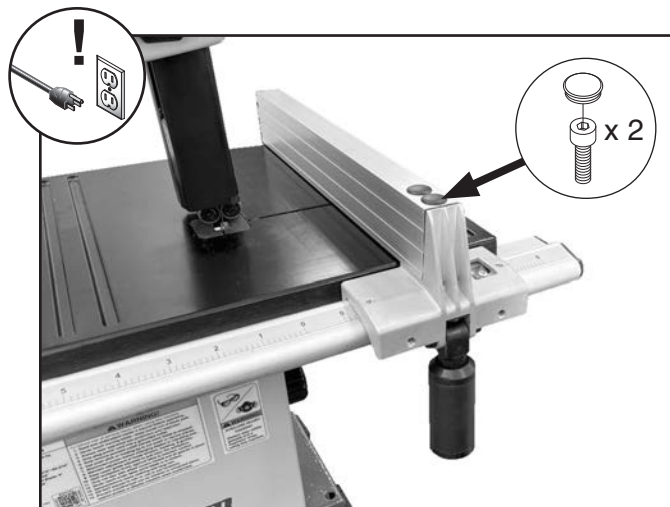


Figure 31. Location of cover caps and fence adjustment cap screws.

6. Adjust fence parallel with miter slot, then tighten cap screws from **Step 5**.
7. Re-install cover caps.



grizzly.com[®]

TOOL WEBSITE

Buy Direct and Save with Grizzly[®] – Trusted, Proven and a Great Value!
~Since 1983~

*Visit Our Website Today For
Current Specials!*

**ORDER
24 HOURS A DAY!
1-800-523-4777**



Grizzly *Industrial, Inc.*®

MODEL G0803Z 9" BENCHTOP BANDSAW OWNER'S MANUAL

(For models manufactured since 05/20)



COPYRIGHT © JANUARY, 2019 BY GRIZZLY INDUSTRIAL, INC. REVISED MAY, 2020 (CS)
**WARNING: NO PORTION OF THIS MANUAL MAY BE REPRODUCED IN ANY SHAPE
OR FORM WITHOUT THE WRITTEN APPROVAL OF GRIZZLY INDUSTRIAL, INC.**

#TKES19434 PRINTED IN CHINA

V3.05.20



WARNING!

This manual provides critical safety instructions on the proper setup, operation, maintenance, and service of this machine/tool. Save this document, refer to it often, and use it to instruct other operators.

Failure to read, understand and follow the instructions in this manual may result in fire or serious personal injury—including amputation, electrocution, or death.

The owner of this machine/tool is solely responsible for its safe use. This responsibility includes but is not limited to proper installation in a safe environment, personnel training and usage authorization, proper inspection and maintenance, manual availability and comprehension, application of safety devices, cutting/sanding/grinding tool integrity, and the usage of personal protective equipment.

The manufacturer will not be held liable for injury or property damage from negligence, improper training, machine modifications or misuse.



WARNING!

Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- **Lead from lead-based paints.**
- **Crystalline silica from bricks, cement and other masonry products.**
- **Arsenic and chromium from chemically-treated lumber.**

Your risk from these exposures varies, depending on how often you do this type of work. To reduce your exposure to these chemicals: Work in a well ventilated area, and work with approved safety equipment, such as those dust masks that are specially designed to filter out microscopic particles.

Table of Contents

INTRODUCTION	2	Setting Upper Blade Guide Height	29
Contact Info.....	2	Tilting Table	30
Manual Accuracy	2	Choosing Blades.....	30
Identification.....	3	Changing Blade	32
Controls & Components.....	4	Ripping.....	33
Machine Data Sheet	6	Crosscutting.....	33
SECTION 1: SAFETY	8	Resawing	34
Safety Instructions for Machinery	8	Cutting Curves	34
Additional Safety for Bandsaws	10	Stacked Cuts.....	35
SECTION 2: POWER SUPPLY	11	SECTION 5: ACCESSORIES	36
SECTION 3: SETUP	13	SECTION 6: MAINTENANCE	39
Unpacking	13	Schedule	39
Inventory	13	Cleaning & Lubricating.....	39
Needed for Setup.....	13	SECTION 7: SERVICE	40
Site Considerations.....	14	Troubleshooting	40
Bench Mounting.....	14	Checking/Adjusting Belt Tension	43
Assembly	15	Replacing Belt.....	44
Adjustment Overview	17	Wheel Alignment.....	45
Blade Tracking.....	17	Blade Lead.....	47
Dust Collection.....	19	Adjusting Laser Sight.....	48
Test Run	20	Replacing Laser Sight Batteries	48
Tensioning Blade	21	SECTION 8: WIRING	49
Adjusting Blade Support Bearings	22	Wiring Safety Instructions	49
Adjusting Blade Guide Bearings.....	23	Wiring Diagram	50
Aligning Table	25	SECTION 9: PARTS	51
Aligning Fence	26	Main	51
SECTION 4: OPERATIONS	27	Labels & Cosmetics	54
Operation Overview	27	WARRANTY & RETURNS	55
Disabling Switch.....	28		
Workpiece Inspection.....	29		

WARNING

Like all machinery there is potential danger when operating this machine. Accidents are frequently caused by lack of familiarity or failure to pay attention. Use this machine with respect and caution to decrease the risk of operator injury. If normal safety precautions are overlooked or ignored, serious personal injury may occur.

WARNING

No list of safety guidelines can be complete. Every shop environment is different. Always consider safety first, as it applies to your individual working conditions. Use this and other machinery with caution and respect. Failure to do so could result in serious personal injury, damage to equipment, or poor work results.

INTRODUCTION

Contact Info

We stand behind our machines! If you have questions or need help, contact us with the information below. Before contacting, make sure you get the **serial number** and **manufacture date** from the machine ID label. This will help us help you faster.

Grizzly Technical Support
1815 W. Battlefield
Springfield, MO 65807
Phone: (570) 546-9663
Email: techsupport@grizzly.com

We want your feedback on this manual. What did you like about it? Where could it be improved? Please take a few minutes to give us feedback.

Grizzly Documentation Manager
P.O. Box 2069
Bellingham, WA 98227-2069
Email: manuals@grizzly.com


Manual Accuracy

We are proud to provide a high-quality owner's manual with your new machine!

We made every effort to be exact with the instructions, specifications, drawings, and photographs in this manual. Sometimes we make mistakes, but our policy of continuous improvement also means that **sometimes the machine you receive is slightly different than shown in the manual.**

If you find this to be the case, and the difference between the manual and machine leaves you confused or unsure about something, check our website for an updated version. We post current manuals and manual updates for free on our website at www.grizzly.com.


Alternatively, you can call our Technical Support for help. Before calling, make sure you write down the **Manufacture Date** and **Serial Number** from the machine ID label (see below). This information is required for us to provide proper tech support, and it helps us determine if updated documentation is available for your machine.

		MODEL GXXXX MACHINE NAME	
SPECIFICATIONS		▲ WARNING!	
Motor:	To reduce risk of serious injury when using this machine:		
Specification:	Read manual before operation.		
Specification:	Wear safety glasses and respirator.		
Specification:	Use safety glasses and respirator.		
Specification:	Use safety glasses and respirator.		
Weight:	Use safety glasses and respirator.		
	power is connected to grounded circuit before starting.		
	4. Make sure the motor has stopped and disconnect power before adjustments, maintenance, or service.		
	5. DO NOT expose to rain or dampness.		
	6. DO NOT modify this machine in any way.		
	7.		
	8.		
	9. Do not use while under the influence of drugs or alcohol.		
	10. Maintain machine carefully to prevent accidents.		
Manufactured for Grizzly in Taiwan			



Identification

Become familiar with the names and locations of the controls and features shown below to better understand the instructions in this manual.

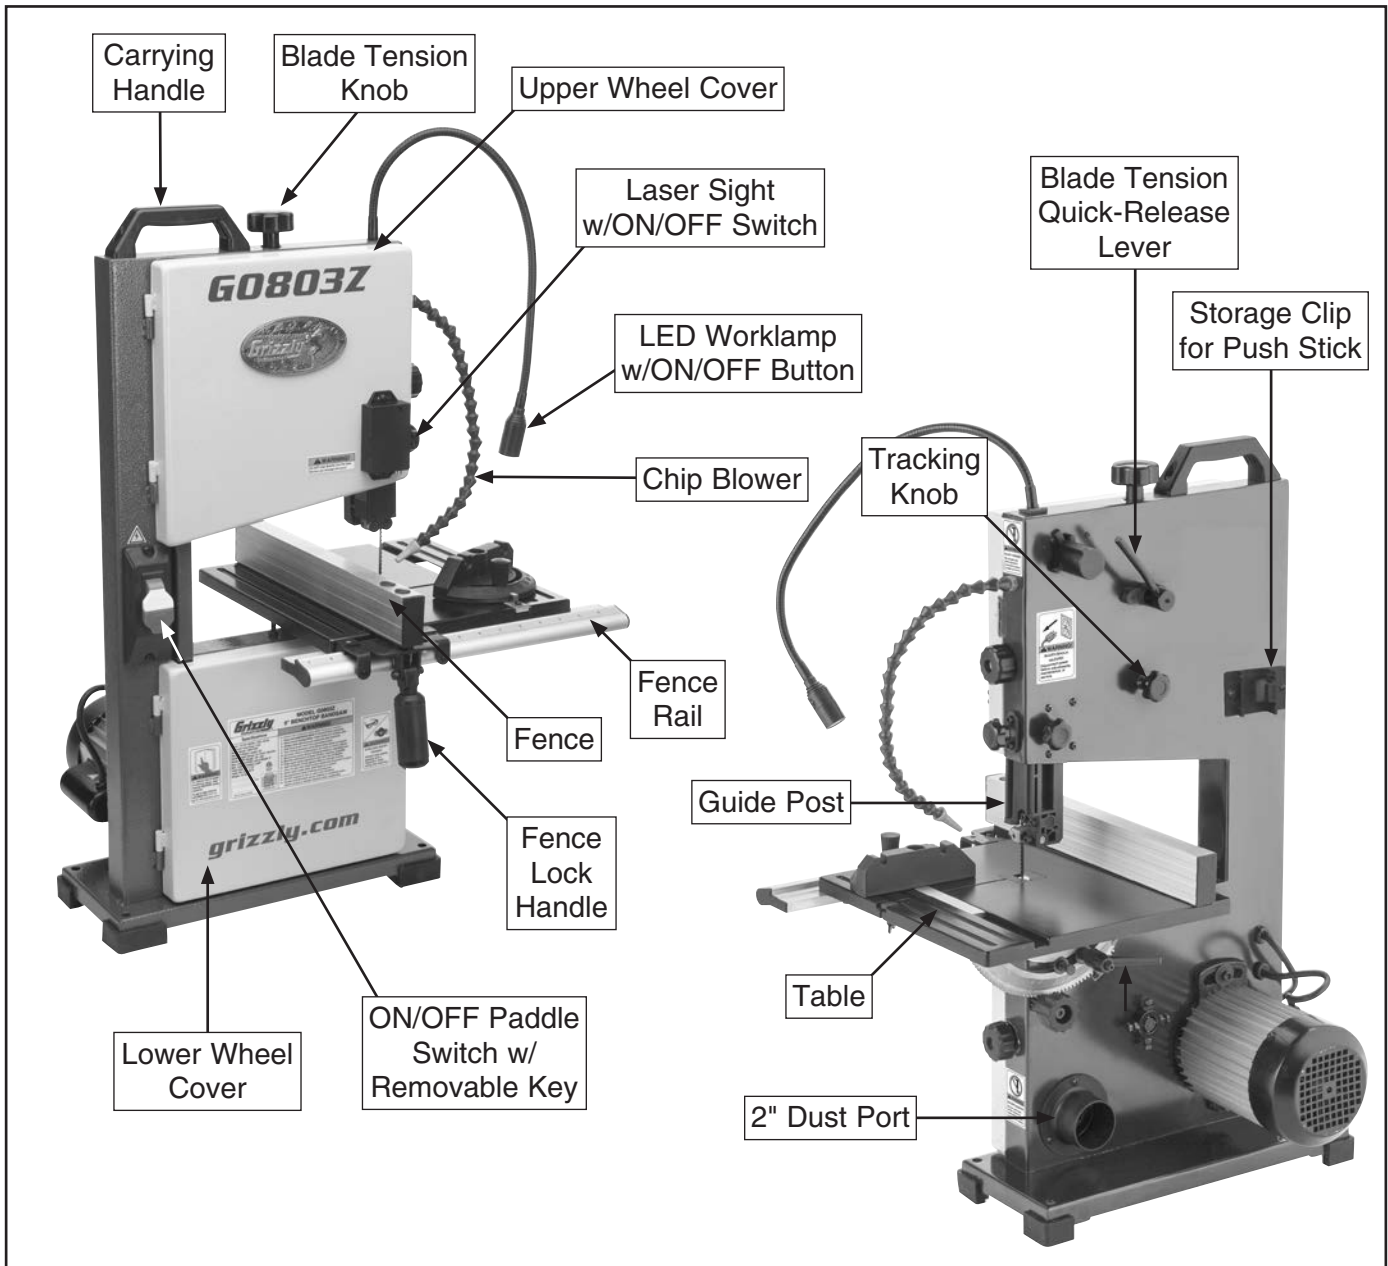


⚠ CAUTION

For Your Own Safety, Read Instruction Manual Before Operating Saw.

- a) **Wear eye protection.**
- b) **Do not remove jammed cutoff pieces until blade has stopped.**
- c) **Maintain proper adjustment of blade tension, blade guides, and thrust bearings.**
- d) **Adjust upper blade guide to just clear workpiece.**
- e) **Hold workpiece firmly against table.**



Controls & Components



!WARNING

To reduce your risk of serious injury, read this entire manual **BEFORE** using machine.

Refer to **Figures 1–5** and the following descriptions to become familiar with the basic controls and components of this machine. Understanding these items and how they work will help you understand the rest of the manual and stay safe when operating this machine.

Basic Controls & Components

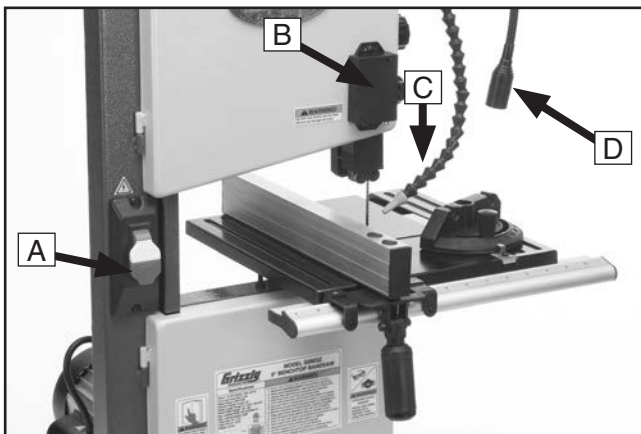


Figure 1. Basic Controls & Components.

- A. ON/OFF Paddle Switch w/Removable Key:** Turns machine **ON** and **OFF**. Remove key to disable machine.
- B. Laser Sight w/ON/OFF Switch:** Projects down length of blade and onto workpiece to help guide cut.
- C. Chip Blower:** Gently blows dust and debris away from cutting area.
- D. LED Worklamp w/ON/OFF Button:** Illuminates cutting area for better visibility.

Fence & Miter Gauge

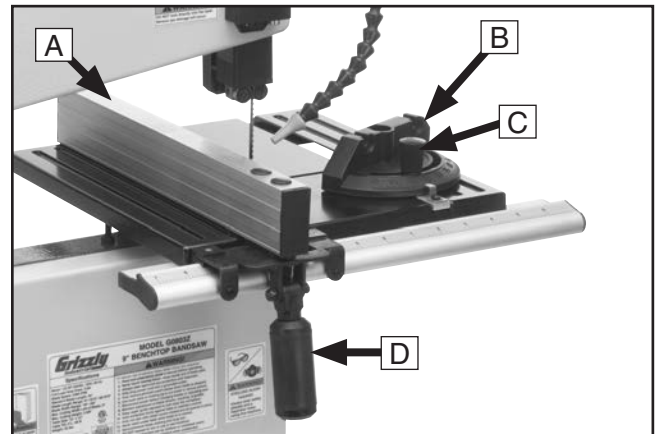


Figure 2. Fence and miter gauge controls.

- A. Fence:** Used for ripping, resawing, or cutting tenons. Distance from blade determines width of cut.
- B. Miter Gauge:** Used for cross cuts. Adjusts 60° left or right.
- C. Miter Gauge Lock Knob:** Secures angle position of miter gauge.
- D. Fence Lock Handle:** Secures fence position.

Guide Post

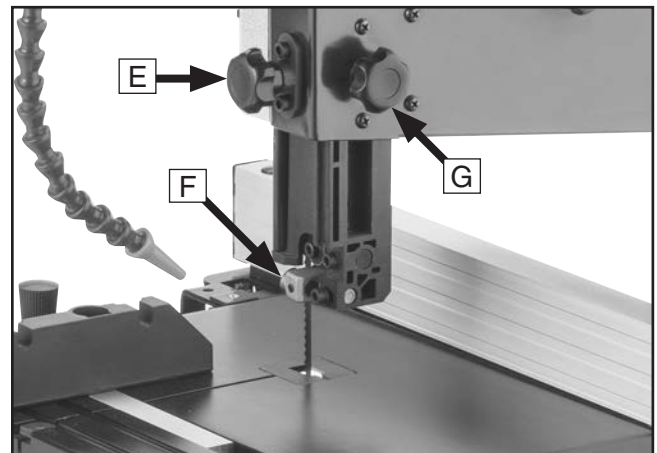


Figure 3. Guide post controls.

- E. Guide Post Adjustment Knob:** Rotate to adjust height of blade guides above workpiece.
- F. Upper Blade Guide:** Supports blade above workpiece during operations.
- G. Guide Post Lock Knob:** Secures height of blade guides.



Blade Tension & Tracking

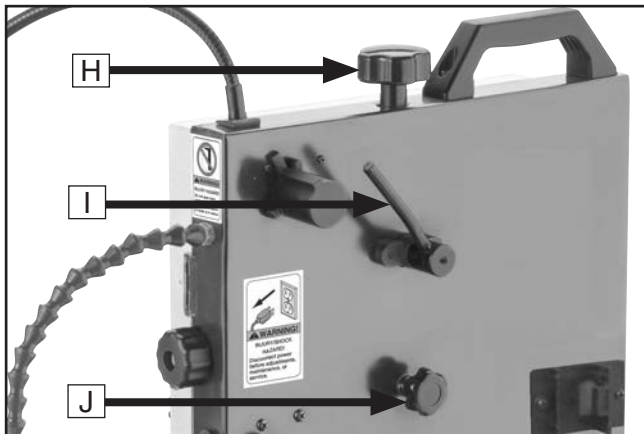


Figure 4. Blade tension and tracking controls.

- H. Blade Tension Adjustment Knob:** Rotate to adjust blade tension (refer to **Page 21** for more information).
- I. Blade Tension Quick-Release Lever:** Move counterclockwise (as viewed from rear of machine) to quickly release blade tension. Move clockwise to re-tension blade.
- J. Tracking Knob:** Rotate to adjust blade tracking (refer to **Page 17** for more information).

Table Tilt

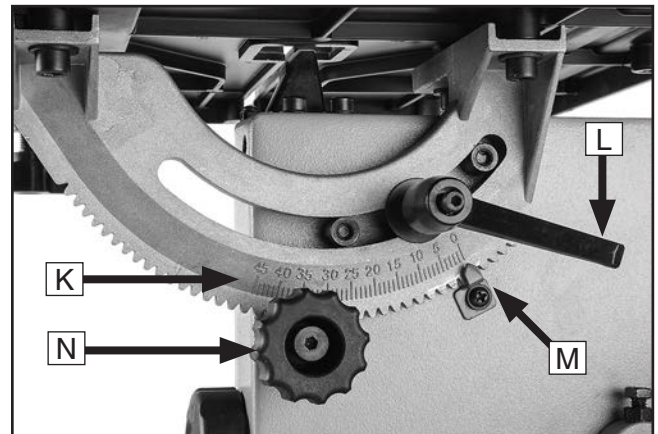


Figure 5. Table tilt controls.

- K. Trunnion w/Table Tilt Scale:** Functions as a tilting base for table. Graduated in degrees from 0°–45° for setting bevel angle.
- L. Table Tilt Lock Lever:** Secures table tilt angle setting.
- M. Table Tilt Indicator:** Shows angle of table tilt.
- N. Table Tilt Adjustment Knob:** Rotate to adjust angle of table tilt.





MACHINE DATA SHEET

Customer Service #: (570) 546-9663 · To Order Call: (800) 523-4777 · Fax #: (800) 438-5901

MODEL G0803Z 9" BENCHTOP BANDSAW WITH LASER GUIDE

Product Dimensions:

Weight..... 42 lbs.
 Width (side-to-side) x Depth (front-to-back) x Height..... 20-3/4 x 17 x 29-1/2 in.
 Footprint (Length x Width)..... 15-1/2 x 6-1/2 in.

Shipping Dimensions:

Type..... Cardboard Box
 Content..... Machine
 Weight..... 49 lbs.
 Length x Width x Height..... 32 x 18 x 14 in.
 Must Ship Upright..... No

Electrical:

Power Requirement..... 120V, Single-Phase, 60 Hz
 Full-Load Current Rating..... 2.8A
 Minimum Circuit Size..... 15A
 Connection Type..... Cord & Plug
 Power Cord Included..... Yes
 Power Cord Length..... 6 ft.
 Power Cord Gauge..... 18 AWG
 Plug Included..... Yes
 Included Plug Type..... 5-15
 Switch Type..... Paddle Safety Switch w/Removable Key

Motors:

Main

Horsepower..... 1/3 HP
 Phase..... Single-Phase
 Amps..... 2.8A
 Speed..... 1720 RPM
 Type..... ODP Induction
 Power Transfer Belt

Main Specifications:

Main Specifications

Bandsaw Size..... 9 in.
 Max Cutting Width (Left of Blade)..... 9 in.
 Max Cutting Width (Left of Blade) w/Fence..... 4-1/2 in.
 Max Cutting Height (Resaw Height)..... 3-5/8 in.
 Blade Speeds..... 2460 FPM



Blade Information

Standard Blade Length.....	62 in.
Blade Length Range.....	61-13/16 - 62-3/16 in.
Blade Width Range.....	1/8 - 3/8 in.
Type of Blade Guides.....	Ball Bearing
Guide Post Adjustment Type.....	Rack & Pinion
Has Quick-Release.....	Yes

Table Information

Table Length.....	12 in.
Table Width.....	12 in.
Table Thickness.....	5/8 in.
Table Tilt.....	0 - 45 deg.
Table Tilt Adjustment Type.....	Rack & Pinion
Floor-to-Table Height.....	13 in.
Fence Locking Position.....	Front
Fence is Adjustable for Blade Lead.....	Yes
Miter Gauge Included.....	Yes

Construction Materials

Table.....	Cast Aluminum
Trunnion.....	Cast Aluminum
Fence.....	Extruded Aluminum
Base/Stand.....	Pre-Formed Steel
Frame/Body.....	Pre-Formed Steel
Wheels.....	Balanced Aluminum
Tire.....	Rubber
Wheel Cover.....	Steel
Paint Type/Finish.....	Urethane

Other Related Information

Wheel Diameter.....	9-5/16 in.
Wheel Width.....	3/4 in.
Number of Dust Ports.....	1
Dust Port Size.....	2 in.

Other Specifications:

Country of Origin	China
Warranty	1 Year
Approximate Assembly & Setup Time	30 Minutes
Serial Number Location	ID Label
ISO 9001 Factory	Yes

Features:

- Laser Sight
- Adjustable Wheels for Alignment/Coplanarity
- Fence Adjustable for Blade Lead
- Rack & Pinion Table Tilt
- Ball-Bearing Blade Guides
- Quick-Release Blade Tension Lever
- Extruded Aluminum Rip Fence with Camlock Handle
- Lower Wheel Brush to Prevent Build-Up of Dust/Pitch on Wheel
- 2" Dust Port
- Dust Blower
- Work Light

Accessories Included:

- Push Stick
- Miter Gauge



SECTION 1: SAFETY

For Your Own Safety, Read Instruction Manual Before Operating This Machine

The purpose of safety symbols is to attract your attention to possible hazardous conditions. This manual uses a series of symbols and signal words intended to convey the level of importance of the safety messages. The progression of symbols is described below. Remember that safety messages by themselves do not eliminate danger and are not a substitute for proper accident prevention measures. Always use common sense and good judgment.

⚠ DANGER Indicates an imminently hazardous situation which, if not avoided, **WILL** result in death or serious injury.

⚠ WARNING Indicates a potentially hazardous situation which, if not avoided, **COULD** result in death or serious injury.

⚠ CAUTION Indicates a potentially hazardous situation which, if not avoided, **MAY** result in minor or moderate injury. It may also be used to alert against unsafe practices.

NOTICE Alerts the user to useful information about proper operation of the machine to avoid machine damage.

Safety Instructions for Machinery

⚠ WARNING

OWNER'S MANUAL. Read and understand this owner's manual **BEFORE** using machine.

TRAINED OPERATORS ONLY. Untrained operators have a higher risk of being hurt or killed. Only allow trained/supervised people to use this machine. When machine is not being used, disconnect power, remove switch keys, or lock-out machine to prevent unauthorized use—especially around children. Make your workshop kid proof!

DANGEROUS ENVIRONMENTS. Do not use machinery in areas that are wet, cluttered, or have poor lighting. Operating machinery in these areas greatly increases the risk of accidents and injury.

MENTAL ALERTNESS REQUIRED. Full mental alertness is required for safe operation of machinery. Never operate under the influence of drugs or alcohol, when tired, or when distracted.

ELECTRICAL EQUIPMENT INJURY RISKS. You can be shocked, burned, or killed by touching live electrical components or improperly grounded machinery. To reduce this risk, only allow qualified service personnel to do electrical installation or repair work, and always disconnect power before accessing or exposing electrical equipment.

DISCONNECT POWER FIRST. Always disconnect machine from power supply **BEFORE** making adjustments, changing tooling, or servicing machine. This prevents an injury risk from unintended startup or contact with live electrical components.

EYE PROTECTION. Always wear ANSI-approved safety glasses or a face shield when operating or observing machinery to reduce the risk of eye injury or blindness from flying particles. Everyday eyeglasses are **NOT** approved safety glasses.



WARNING

WEARING PROPER APPAREL. Do not wear clothing, apparel or jewelry that can become entangled in moving parts. Always tie back or cover long hair. Wear non-slip footwear to reduce risk of slipping and losing control or accidentally contacting cutting tool or moving parts.

HAZARDOUS DUST. Dust created by machinery operations may cause cancer, birth defects, or long-term respiratory damage. Be aware of dust hazards associated with each workpiece material. Always wear a NIOSH-approved respirator to reduce your risk.

HEARING PROTECTION. Always wear hearing protection when operating or observing loud machinery. Extended exposure to this noise without hearing protection can cause permanent hearing loss.

REMOVE ADJUSTING TOOLS. Tools left on machinery can become dangerous projectiles upon startup. Never leave chuck keys, wrenches, or any other tools on machine. Always verify removal before starting!

USE CORRECT TOOL FOR THE JOB. Only use this tool for its intended purpose—do not force it or an attachment to do a job for which it was not designed. Never make unapproved modifications—modifying tool or using it differently than intended may result in malfunction or mechanical failure that can lead to personal injury or death!

AWKWARD POSITIONS. Keep proper footing and balance at all times when operating machine. Do not overreach! Avoid awkward hand positions that make workpiece control difficult or increase the risk of accidental injury.

CHILDREN & BYSTANDERS. Keep children and bystanders at a safe distance from the work area. Stop using machine if they become a distraction.

GUARDS & COVERS. Guards and covers reduce accidental contact with moving parts or flying debris. Make sure they are properly installed, undamaged, and working correctly **BEFORE** operating machine.

FORCING MACHINERY. Do not force machine. It will do the job safer and better at the rate for which it was designed.

NEVER STAND ON MACHINE. Serious injury may occur if machine is tipped or if the cutting tool is unintentionally contacted.

STABLE MACHINE. Unexpected movement during operation greatly increases risk of injury or loss of control. Before starting, verify machine is stable and mobile base (if used) is locked.

USE RECOMMENDED ACCESSORIES. Consult this owner's manual or the manufacturer for recommended accessories. Using improper accessories will increase the risk of serious injury.

UNATTENDED OPERATION. To reduce the risk of accidental injury, turn machine **OFF** and ensure all moving parts completely stop before walking away. Never leave machine running while unattended.

MAINTAIN WITH CARE. Follow all maintenance instructions and lubrication schedules to keep machine in good working condition. A machine that is improperly maintained could malfunction, leading to serious personal injury or death.

DAMAGED PARTS. Regularly inspect machine for damaged, loose, or mis-adjusted parts—or any condition that could affect safe operation. Immediately repair/replace **BEFORE** operating machine. For your own safety, **DO NOT** operate machine with damaged parts!

MAINTAIN POWER CORDS. When disconnecting cord-connected machines from power, grab and pull the plug—**NOT** the cord. Pulling the cord may damage the wires inside. Do not handle cord/plug with wet hands. Avoid cord damage by keeping it away from heated surfaces, high traffic areas, harsh chemicals, and wet/damp locations.

EXPERIENCING DIFFICULTIES. If at any time you experience difficulties performing the intended operation, stop using the machine! Contact our Technical Support at (570) 546-9663.



Additional Safety for Bandsaws

WARNING

Serious cuts, amputation, or death can occur from contact with the moving saw blade during operation or if blade breakage occurs. To reduce this risk, anyone operating this machine MUST completely heed the hazards and warnings below.

HAND PLACEMENT. Placing hands or fingers in line with blade during operation may result in serious injury if hands slip or workpiece moves unexpectedly. Do not position fingers or hands in line with blade, and never reach under table while blade is moving.

SMALL/NARROW WORKPIECES. If hands slip during a cut while holding small workpieces with fingers, serious personal injury could occur. Always support/feed small or narrow workpieces with push sticks, push blocks, jig, vise, or some type of clamping fixture.

BLADE SPEED. Cutting workpiece before blade is at full speed could cause blade to grab workpiece and pull hands into blade. Allow blade to reach full speed before starting cut. DO NOT start machine with workpiece contacting blade.

FEED RATE. To avoid risk of workpiece slipping and causing operator injury, always feed stock evenly and smoothly.

BLADE CONDITION. Dull blades require more effort to perform cut, increasing risk of accidents. Do not operate with dirty, dull, cracked or badly worn blades. Inspect blades for cracks and missing teeth before each use. Always maintain proper blade tension and tracking while operating.

CLEARING JAMS AND CUTOFFS. Always stop bandsaw and disconnect power before clearing scrap pieces that get stuck between blade and table insert. Use brush or push stick, not hands, to clean chips/cutoff scraps from table.

BLADE CONTROL. To avoid risk of injury due to blade contact, always allow blade to stop on its own. DO NOT try to stop or slow blade with your hand or the workpiece.

GUARDS/COVERS. Blade guards and covers protect operator from the moving bandsaw blade. The wheel covers protect operator from getting entangled with rotating wheels or other moving parts. ONLY operate this bandsaw with blade guard in proper position and wheel covers completely closed.

BLADE REPLACEMENT. To avoid mishaps that could result in operator injury, make sure blade teeth face down toward table and blade is properly tensioned and tracked before operating.

UPPER BLADE GUIDE SUPPORT. To reduce exposure of operator to blade and provide maximum blade support while cutting, keep upper blade guides adjusted to just clear workpiece.

CUTTING TECHNIQUES. To avoid blade getting pulled off wheels or accidentally breaking and striking operator, always turn bandsaw **OFF** and wait for blade to come to a complete stop before backing workpiece out of blade. DO NOT back workpiece away from blade while bandsaw is running. DO NOT force or twist blade while cutting, especially when sawing small curves. This could result in blade damage or breakage.

WORKPIECE SUPPORT. To maintain maximum control and reduce risk of blade contact/breakage, always ensure adequate support of long/large workpieces. Always keep workpiece flat and firm against table/fence when cutting to avoid loss of control. If necessary, use a jig or other workholding device.


WORKPIECE MATERIAL. This machine is intended for cutting natural and man-made wood products, and laminate covered wood products. This machine is NOT designed to cut metal, glass, stone, tile, etc.



SECTION 2: POWER SUPPLY

Availability

Before installing the machine, consider the availability and proximity of the required power supply circuit. If an existing circuit does not meet the requirements for this machine, a new circuit must be installed. To minimize the risk of electrocution, fire, or equipment damage, installation work and electrical wiring must be done by an electrician or qualified service personnel in accordance with all applicable codes and standards.

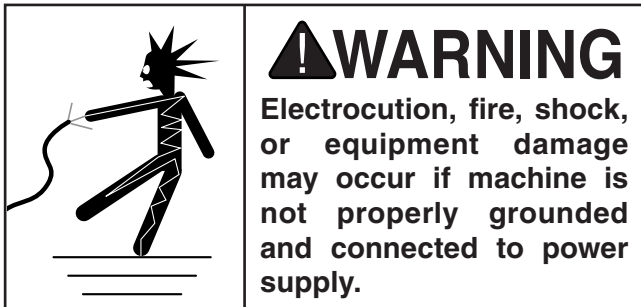

Full-Load Current Rating

The full-load current rating is the amperage a machine draws at 100% of the rated output power. On machines with multiple motors, this is the amperage drawn by the largest motor or sum of all motors and electrical devices that might operate at one time during normal operations.

Full-Load Current Rating at 120V ... 2.8 Amps

The full-load current is not the maximum amount of amps that the machine will draw. If the machine is overloaded, it will draw additional amps beyond the full-load rating.

If the machine is overloaded for a sufficient length of time, damage, overheating, or fire may result—especially if connected to an undersized circuit. To reduce the risk of these hazards, avoid overloading the machine during operation and make sure it is connected to a power supply circuit that meets the specified circuit requirements.

! WARNING

Serious injury could occur if you connect machine to power before completing setup process. DO NOT connect to power until instructed later in this manual.

120V Circuit Requirements

This machine is prewired to operate on a power supply circuit that has a verified ground and meets the following requirements:

Nominal Voltage 110V, 115V, 120V
Cycle 60 Hz
Phase Single-Phase
Power Supply Circuit 15 Amps

A power supply circuit includes all electrical equipment between the breaker box or fuse panel in the building and the machine. The power supply circuit used for this machine must be sized to safely handle the full-load current drawn from the machine for an extended period of time. (If this machine is connected to a circuit protected by fuses, use a time delay fuse marked D.)

! CAUTION

For your own safety and protection of property, consult an electrician if you are unsure about wiring practices or electrical codes in your area.

Note: *Circuit requirements in this manual apply to a dedicated circuit—where only one machine will be running on the circuit at a time. If machine will be connected to a shared circuit where multiple machines may be running at the same time, consult an electrician or qualified service personnel to ensure circuit is properly sized for safe operation.*



Grounding & Plug Requirements

This machine **MUST** be grounded. In the event of certain malfunctions or breakdowns, grounding reduces the risk of electric shock by providing a path of least resistance for electric current.

This machine is equipped with a power cord that has an equipment-grounding wire and a grounding plug. Only insert plug into a matching receptacle (outlet) that is properly installed and grounded in accordance with all local codes and ordinances. **DO NOT** modify the provided plug!

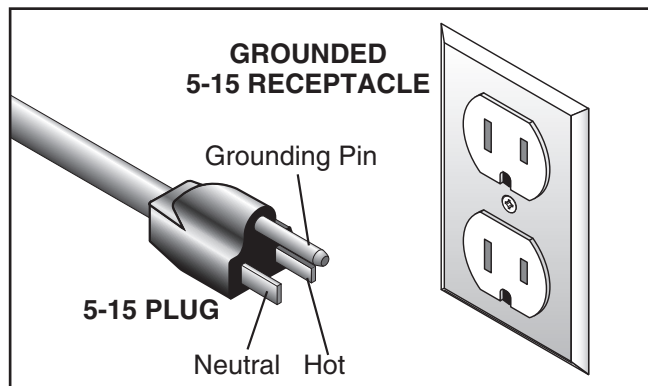


Figure 6. Typical 5-15 plug and receptacle.

⚠ CAUTION

SHOCK HAZARD!

Two-prong outlets do not meet the grounding requirements for this machine. Do not modify or use an adapter on the plug provided—if it will not fit the outlet, have a qualified electrician install the proper outlet with a verified ground.

Improper connection of the equipment-grounding wire can result in a risk of electric shock. The wire with green insulation (with or without yellow stripes) is the equipment-grounding wire. If repair or replacement of the power cord or plug is necessary, do not connect the equipment-grounding wire to a live (current carrying) terminal.

Check with a qualified electrician or service personnel if you do not understand these grounding requirements, or if you are in doubt about whether the tool is properly grounded. If you ever notice that a cord or plug is damaged or worn, disconnect it from power, and immediately replace it with a new one.

Extension Cords

We do not recommend using an extension cord with this machine. If you must use an extension cord, only use it if absolutely necessary and only on a temporary basis.

Extension cords cause voltage drop, which can damage electrical components and shorten motor life. Voltage drop increases as the extension cord size gets longer and the gauge size gets smaller (higher gauge numbers indicate smaller sizes).

Any extension cord used with this machine must be in good condition and contain a ground wire and matching plug/receptacle. Additionally, it must meet the following size requirements:

Minimum Gauge Size 16 AWG
Maximum Length (Shorter is Better).....50 ft.



SECTION 3: SETUP

Unpacking

This machine was carefully packaged for safe transport. When unpacking, separate all enclosed items from packaging materials and inspect them for shipping damage. ***If items are damaged, please call us immediately at (570) 546-9663.***

IMPORTANT: Save all packaging materials until you are completely satisfied with the machine and have resolved any issues between Grizzly or the shipping agent. ***You MUST have the original packaging to file a freight claim. It is also extremely helpful if you need to return your machine later.***

Inventory

The following is a list of items shipped with your machine. Before beginning setup, lay these items out and inventory them.

If any non-proprietary parts are missing (e.g. a nut or a washer), we will gladly replace them; or for the sake of expediency, replacements can be obtained at your local hardware store.

Inventory (Figure 7)	Qty
A. Bandsaw Body	1
B. Table Assembly	1
C. Rubber Feet	4
D. Chip Blower Hose.....	1
E. Miter Gauge.....	1
F. Hex Wrenches 2.5, 4, 5mm.....	1 Ea.
G. Open-End Wrench 10 x 12mm	1
H. Table Tilt Lock Lever	1
I. Flat Washer 8mm (Lock Lever)	1
J. Push Stick	1
K. Fence.....	1

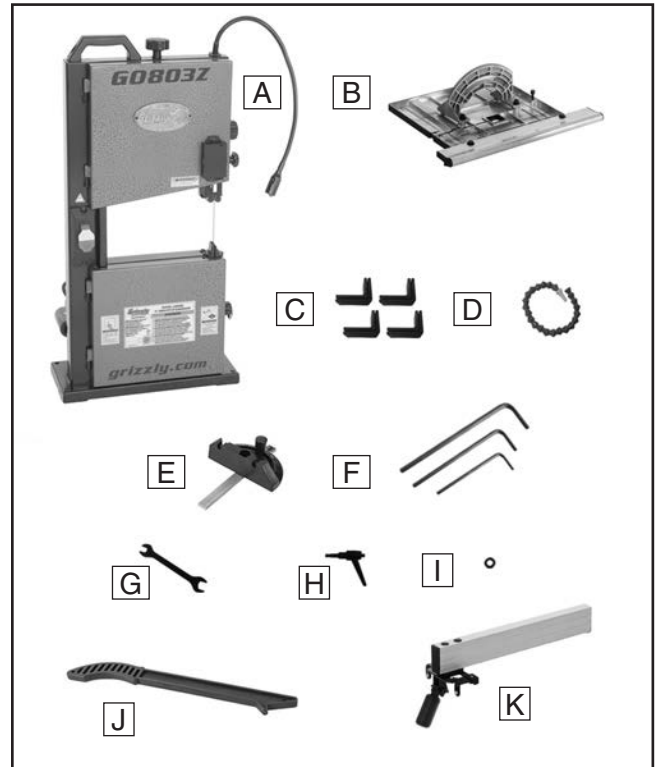


Figure 7. Inventory.

NOTICE

If you cannot find an item on this list, carefully check around/inside the machine and packaging materials. Often, these items get lost in packaging materials while unpacking or they are pre-installed at the factory.

Needed for Setup

The following items are needed, but not included, for the setup/assembly of this machine.

Description	Qty
• Safety Glasses	1
• Small Machinist's Square	1
• Dust-Collection System	1
• Dust Hose 2"	1
• Hose Clamps 2"	2
• Optional Mounting Hardware..(see Page 14)	



Site Considerations

Workbench Load

Refer to the **Machine Data Sheet** for the weight and footprint specifications of your machine. Some workbenches may require additional reinforcement to support the weight of the machine and workpiece materials.

Placement Location

Consider anticipated workpiece sizes and additional space needed for auxiliary stands, work tables, or other machinery when establishing a location for this machine in the shop. Below is the minimum amount of space needed for the machine.

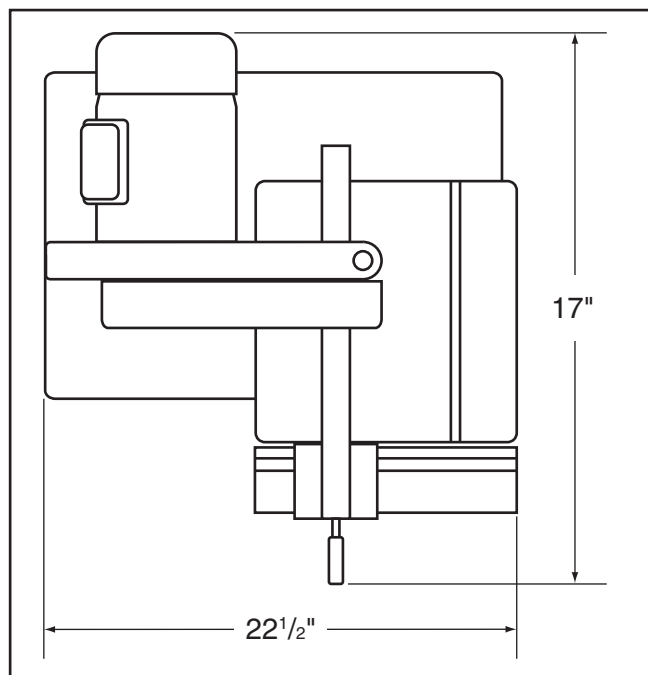


Figure 8. Minimum working clearances.

	<p>⚠ CAUTION</p> <p>Children and visitors may be seriously injured if unsupervised around this machine. Lock entrances to the shop or disable start switch or power connection to prevent unsupervised use.</p>
--	--

Bench Mounting

Number of Mounting Holes 4
Diameter of Mounting Hardware Needed .. 3/8"

The base of this machine has mounting holes that allow it to be fastened to a workbench or other mounting surface to prevent it from moving during operation and causing accidental injury or damage.

The strongest mounting option is a "Through Mount" (see example below) where holes are drilled all the way through the workbench—and hex bolts, washers, and hex nuts are used to secure the machine in place.

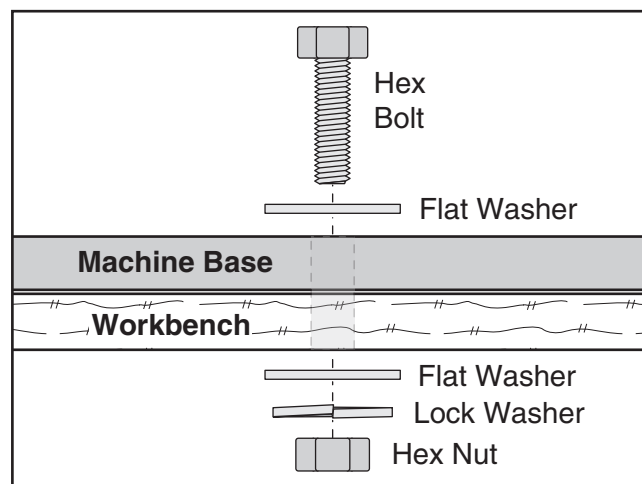


Figure 9. "Through Mount" setup.

Another option is a "direct mount" (see example below) where the machine is secured directly to the workbench with lag screws and washers.


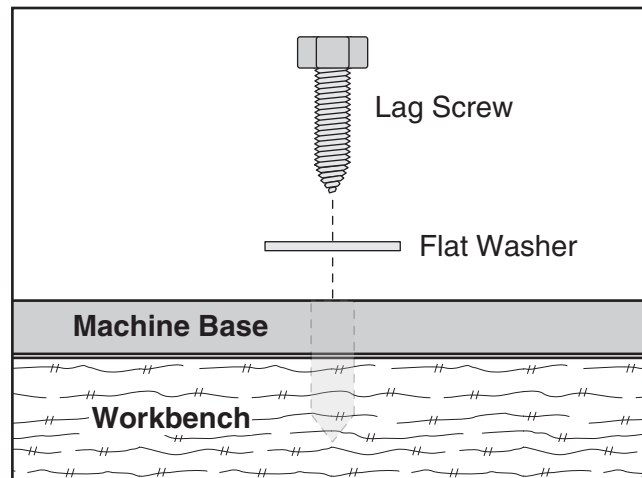


Figure 10. "Direct Mount" setup.



Assembly

The machine must be fully assembled before it can be operated. Before beginning the assembly process, refer to **Needed for Setup** and gather all listed items. To ensure the assembly process goes smoothly, first clean any parts that are covered or coated in heavy-duty rust preventative (if applicable).

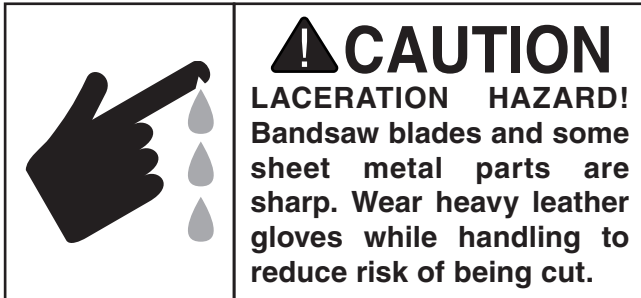

To assemble bandsaw:

1. Attach (4) rubber feet to bandsaw base (see **Figure 11**). Rubber feet simply press onto corners of base.

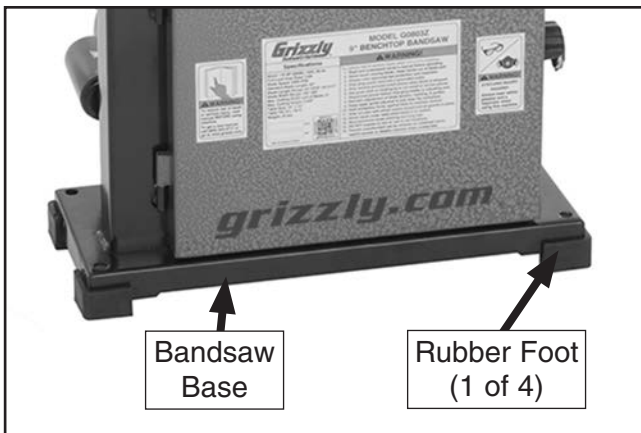


Figure 11. Rubber feet attached to base.

2. Loosen scale indicator and position it down (see **Figure 12**), then remove table tilt lock lever, flat washer, table tilt adjustment knob, and shoulder bolt with spring (see **Figure 12**).

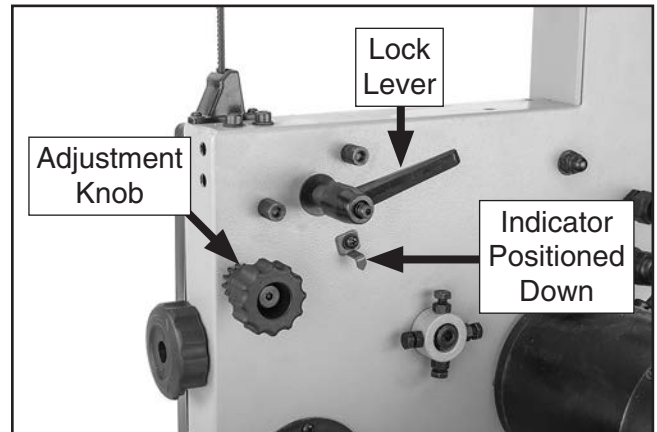


Figure 12. Location of table controls that must be removed or adjusted.

3. Turn guide post adjustment knob (see **Figure 3** on **Page 4** for location) counter-clockwise to raise guide post all the way up.
4. Remove wing bolt, lock washer, flat washer, and D-nut from table assembly. Make note of how fasteners secure to fence assembly for re-installation later.
5. Using gap in table (see **Figure 13**), slide table assembly through blade and rotate assembly 90°. Position assembly as shown in **Figure 13**.

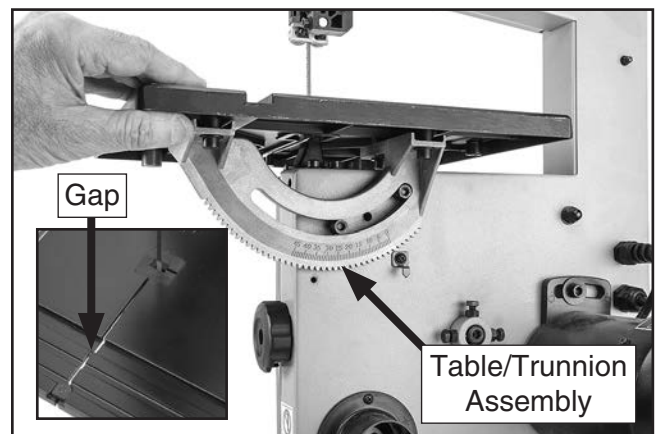


Figure 13. Table assembly positioned on saw.

6. Re-install components removed in **Step 2**. DO NOT fully tighten yet.



7. Completely raise upper blade guide assembly, then place machinist's square flat on table, against side of blade (see **Figure 14**).
8. Use adjustment knob to tilt table until square is flat against side of blade, as illustrated in **Figure 14**.

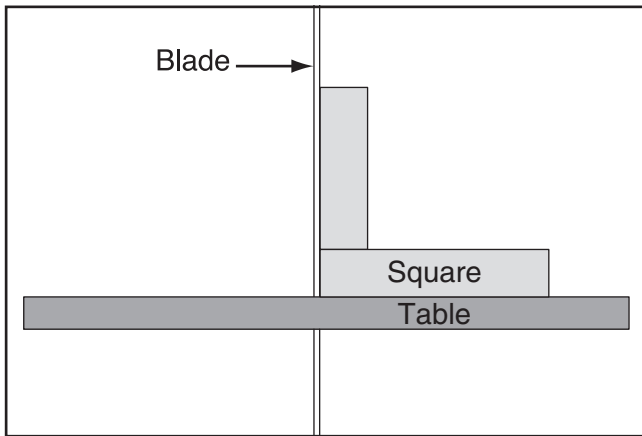


Figure 14. Using a square to adjust table perpendicular to the side of blade.

9. Use lock lever and 8mm flat washer to secure table perpendicular to blade, then set scale indicator to "0" on table tilt scale and tighten screw (see **Figure 15**).

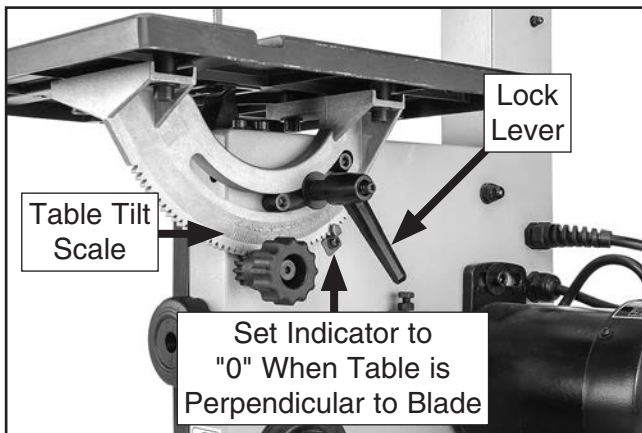


Figure 15. Table tilt controls re-installed.

10. Re-install wing bolt, lock washer, flat washer, and D-nut (removed in **Step 4**) on table assembly.
11. Install fence on fence rail as shown in **Figure 16**.

Note: Fence lock lever (see **Figure 16**) needs to be in up position when fitting fence onto fence rail. Once fence snaps onto fence rail, push lock lever down to secure fence in position.

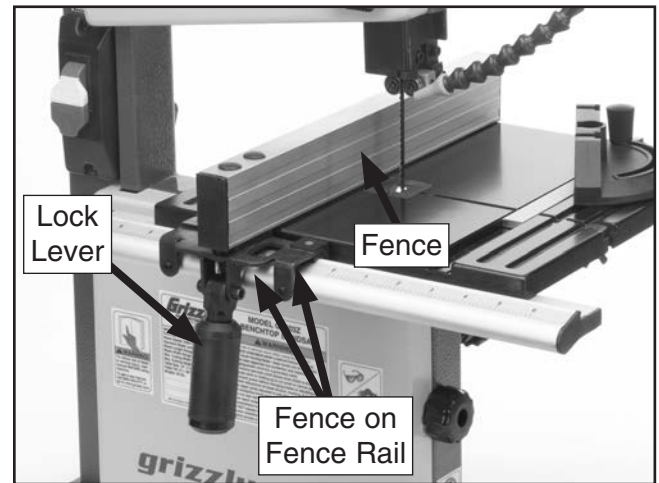


Figure 16. Fence installed on fence rail.

12. Thread chip blower nozzle into nozzle base (see **Figure 17**).

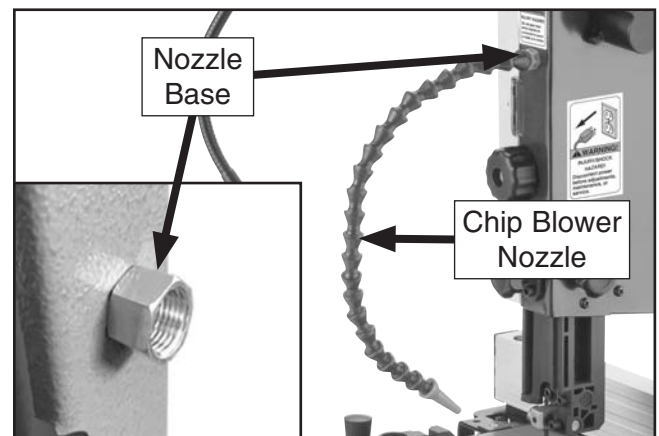


Figure 17. Chip blower nozzle threaded into base.



Adjustment Overview

The bandsaw is one of the most versatile wood-working machines. However, it has multiple components that must be properly adjusted for the best cutting results.

For practical and safety reasons, some adjustments and test operations must be performed before performing other necessary adjustments. Below is an overview of all the adjustments and the order in which they should be performed:

1. Blade Tracking
2. Dust Collection
3. Test Run
4. Tensioning Blade
5. Adjusting Blade Support Bearings
6. Adjusting Blade Guide Bearings
7. Aligning Table
8. Aligning Fence

Blade Tracking

"Tracking" refers to how the blade rides on the bandsaw wheels. Proper tracking is important for maintaining bandsaw adjustments, achieving correct blade tension, and cutting accurately. Improper tracking reduces cutting accuracy, causes excess vibrations, and places stress on the blade and other bandsaw components. The shape of the wheels and the orientation of the wheels in relation to each other determine how the blade tracks.

Bandsaw wheels are either flat or crowned and both shapes track differently. The G0803Z has crowned wheels. As the wheels spin, a properly tracking blade naturally tracks at the center of the wheel (see **Figure 18**).

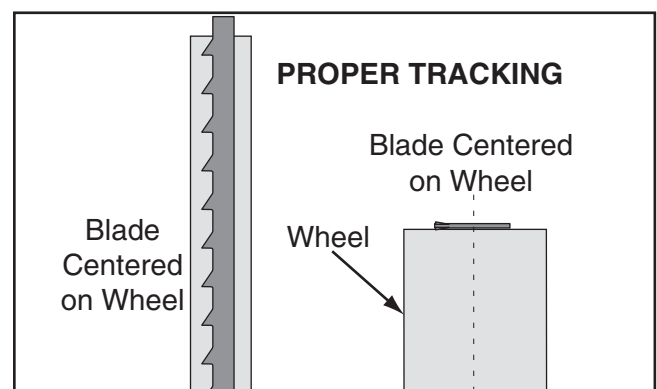


Figure 18. Blade centered on crown of wheel.

The bandsaw wheels must be aligned for optimal machine performance. Properly aligned wheels are parallel and coplanar (see **Figure 19**).

Improper blade tension and cutting practices can negatively affect blade tracking. Familiarizing yourself with the ideas and conditions described in **Figure 19** will help you recognize when your wheel alignment may need to be adjusted (refer to **Wheel Alignment** on **Page 45** for detailed instructions on adjusting the tracking).



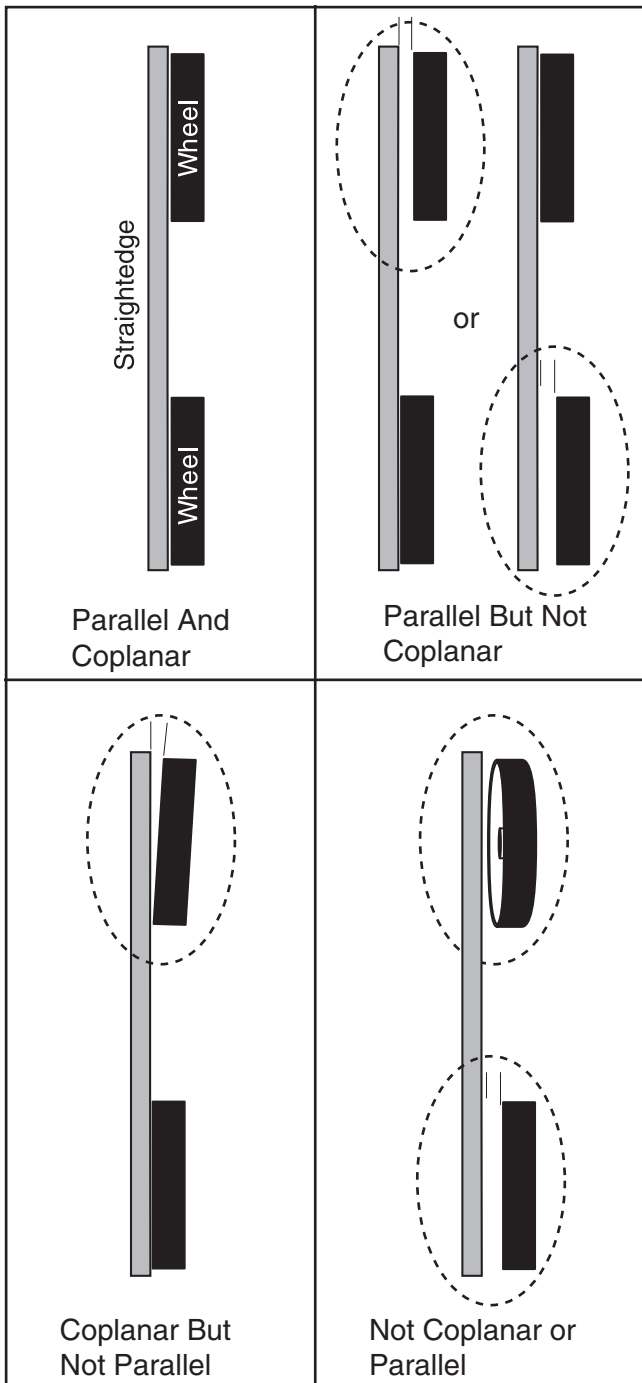


Figure 19. Wheel alignment and misalignment examples.

The wheels on the G0803Z were aligned at the factory, so center tracking is the only adjustment that needs to be performed when the saw is new. This adjustment is necessary before turning the saw on or performing other adjustments.

To adjust blade tracking:

1. DISCONNECT MACHINE FROM POWER!
2. Adjust upper and lower blade guides away from blade, and raise upper guides all the way up (refer to **Adjusting Blade Guide Bearings** on **Page 23** for detailed instructions).

Note: When adjusting the blade tracking for the test run in this procedure, the blade must have approximately the same amount of tension as when under operating conditions. After the test run is successfully completed, you will be instructed on how to more accurately tension the blade for optimum results.

3. Move quick-release lever all the way clockwise (as viewed from the rear of the machine) to apply tension to blade (see **Figure 20**).

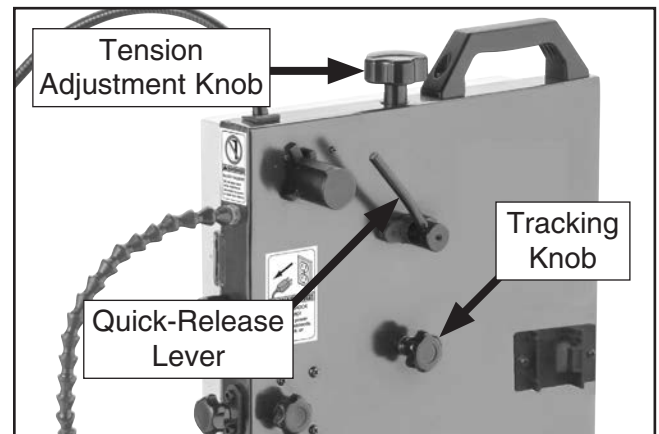


Figure 20. Blade tension and tracking controls.



4. Open upper wheel cover.
5. Push blade toward fence with moderate pressure to check if there is approximately ¼" deflection. If not, rotate tension adjustment knob as needed until blade is properly tensioned.
6. Rotate upper wheel by hand several times and watch how blade rides on wheel (see **Figure 18** on **Page 17** for an illustration of this concept).
 - If the blade rides in the center of the upper wheel, it is properly tracking and you are done with this procedure—proceed to **Dust Collection** on **Page** .
 - If the blade does *not* ride in the center of the upper wheel, it is not properly tracking; continue with the next step to adjust it.
7. Spin upper wheel with one hand and slowly adjust tracking knob (see **Figure 20**) with other hand until blade consistently tracks in center of wheel.
8. Close and secure upper wheel cover before operating bandsaw.

Dust Collection

! CAUTION

This machine creates a lot of wood chips/dust during operation. Breathing airborne dust on a regular basis can result in permanent respiratory illness. Reduce your risk by wearing a respirator and capturing the dust with a dust-collection system.

Recommended CFM at Dust Port: 100 CFM

Do not confuse this CFM recommendation with the rating of the dust collector. To determine the CFM at the dust port, you must consider these variables: (1) CFM rating of the dust collector, (2) hose type and length between the dust collector and the machine, (3) number of branches or wyes, and (4) amount of other open lines throughout the system. Explaining how to calculate these variables is beyond the scope of this manual. Consult an expert or purchase a good dust collection "how-to" book.

To connect a dust collection hose:

1. Fit dust hose over 2" dust port, as shown in **Figure 21**, and secure it in place with a hose clamp.

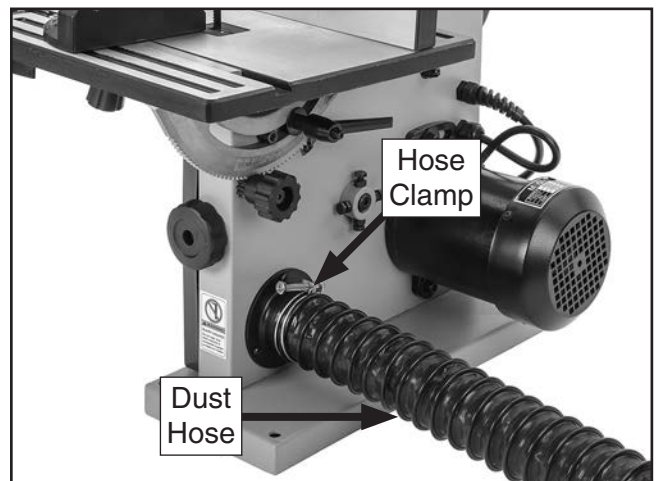


Figure 21. Example of 2" dust hose attached to dust port.

2. Gently pull hose to make sure it does not come off. A tight fit is necessary for proper performance.



Test Run

Once assembly is complete, test run the machine to ensure it is properly connected to power and safety components are functioning correctly.

If you find an unusual problem during the test run, immediately stop the machine, disconnect it from power, and fix the problem **BEFORE** operating the machine again. The **Troubleshooting** table in the **SERVICE** section of this manual can help.

The test run consists of verifying the following:
1) The motor powers up and runs correctly, and 2) the removable key on the switch works correctly.

!WARNING

Serious injury or death can result from using this machine BEFORE understanding its controls and related safety information. DO NOT operate, or allow others to operate, machine until the information is understood.

!WARNING

DO NOT start machine until all preceding setup instructions have been performed. Operating an improperly set up machine may result in malfunction or unexpected results that can lead to serious injury, death, or machine/property damage.

To test run machine:

1. Clear all setup tools away from machine.
2. Connect machine to power supply.
3. Turn machine **ON**, verify motor operation, then turn machine **OFF**.

The motor should run smoothly and without problems or unusual noises.

4. Remove key, as shown in **Figure 22**.

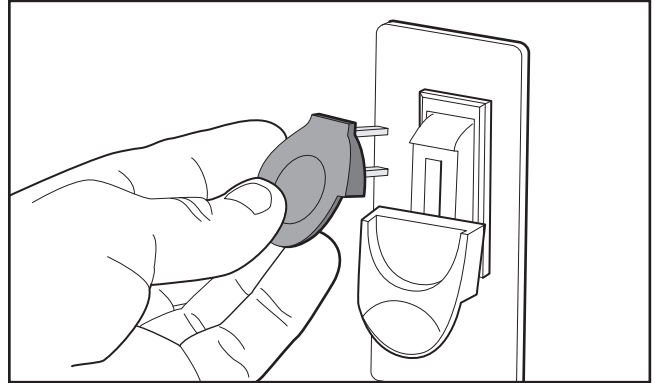


Figure 22. Removing key from ON/OFF paddle switch.

5. Try to start machine with ON/OFF paddle switch. The machine should not start.
 - If the machine *does not* start, the switch is working as designed.
 - If the machine *does start*, immediately stop the machine. The switch is not working correctly. This safety feature must work properly before proceeding with regular operations. Call Tech Support for help.



Tensioning Blade

A properly tensioned blade is essential for making accurate cuts, maximizing the blade life, and making other bandsaw adjustments. However, a properly tensioned blade will not compensate for cutting problems caused by excessive feed rate, hardness variations between workpieces, and improper blade selection.

Optimal cutting results for any type of workpiece are achieved through a combination of correct blade selection, proper blade tension, properly adjusted blade guides and other bandsaw components, and using an appropriate feed rate.

Improper blade tension is unsafe, produces inaccurate and inconsistent results, and introduces unnecessary wear on bandsaw components. Over-tensioning the blade increases the chance of the blade breaking or wheel misalignment. Under-tensioned blades wander excessively while cutting and will not track properly during operation.

The method used to tension the blade is often a matter of preference. This manual describes two methods: the flutter method and the deflection method. Either method will help you properly tension the blade. Experience and personal preference will help you decide which method you prefer.

Note: *Tensioning the blade before the **Test Run** was an approximate tension. The following procedures fine-tune the blade tension.*

The Flutter Method

Using the flutter method, you intentionally loosen the blade until it just passes the point of being too loose (when it begins to flutter). Then you gradually tighten the blade until proper tension is reached.

To tension bandsaw blade using flutter method.

1. DISCONNECT MACHINE FROM POWER!
2. Make sure blade is properly tracking as instructed in **Blade Tracking** section on **Page 17**.
3. Raise guide post all the way, and move upper and lower guide bearings away from blade.
4. Engage blade tension quick-release lever to apply tension to blade.
5. Connect bandsaw to power, then turn it **ON**.
6. Using blade tension adjustment knob, slowly decrease blade tension until you see the blade start to flutter.
7. Slowly increase tension until blade stops fluttering, then tighten blade tension adjustment knob an additional $\frac{1}{8}$ to $\frac{1}{4}$ of a turn.
8. DISCONNECT MACHINE FROM POWER!
9. Adjust blade guides as described in **Adjusting Blade Support Bearings** and **Adjusting Blade Guide Bearings** on **Pages 22–23**.



The Deflection Method

The deflection method is much more subjective than the flutter method. Each blade will deflect differently and every user will determine what "moderate pressure" means. The following are general guidelines for tensioning the blade with this method.

To tension bandsaw blade using deflection method:

1. DISCONNECT MACHINE FROM POWER!
2. Make sure blade is properly tracking as instructed in **Blade Tracking** section on **Page 17**.
3. Raise guide post all the way and move upper and lower guide bearings away from blade.
4. Engage blade tension quick-release lever to apply tension to blade.
5. Using moderate pressure, push center of the blade sideways with one finger.
 - If the blade deflects approximately $\frac{1}{4}$ ", it is properly tensioned. Proceed to **Step 6**.
 - If the blade deflects less than $\frac{1}{4}$ ", it is over-tensioned. Turn the blade tensioning knob counterclockwise two full turns and repeat **Step 5**.
 - If the blade deflects $\frac{1}{4}$ " or more, the blade is not properly tensioned. Apply tension to the blade incrementally and repeat **Step 5** until properly tensioned.
6. Adjust blade guides as described in **Adjusting Blade Support Bearings** and **Adjusting Blade Guide Bearings** on **Pages 22–23**.

Adjusting Blade Support Bearings

The support bearings are positioned behind the blade near the blade guides and prevent the blade from pushing backward during cutting operations. Proper adjustment of the support bearings helps you make accurate cuts and prevents the blade teeth from coming in contact with the blade guides while cutting. If this happens the blade "tooth set" can be ruined, which will greatly reduce the blade's ability to make good cuts.

There are support bearings on the upper and lower blade guide assemblies. Both adjust in the same manner. The following instructions refer to the upper support bearings. To access the lower support bearing, you must open the lower wheel cover (see **Identification** on **Page 3** for reference).

Important: To ensure best results while cutting, make sure the blade is tracking and tensioned correctly before performing this procedure.

Item(s) Needed	Qty
Hex Wrench 4mm.....	1
Feeler Gauge 0.016".....	1

To adjust support bearings:

1. DISCONNECT MACHINE FROM POWER!
2. Open blade cover and loosen support bearing adjustment cap screw (see **Figure 23**).

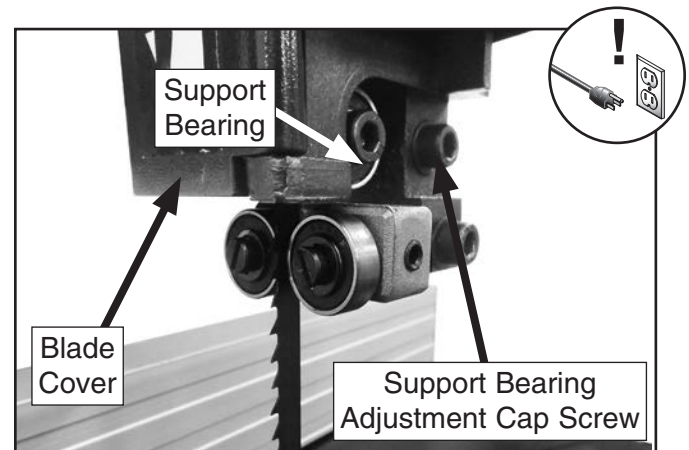


Figure 23. Upper support bearing assembly and controls.



- Position support bearing approximately 0.016" away from the back of the blade, as illustrated in **Figure 24**. This can be measured with a feeler gauge.

Note: The main purpose of this adjustment is to prevent the blade from being pushed backward far enough that the blade guides will contact (and ruin) the "tooth set" of the blade during cutting operations.

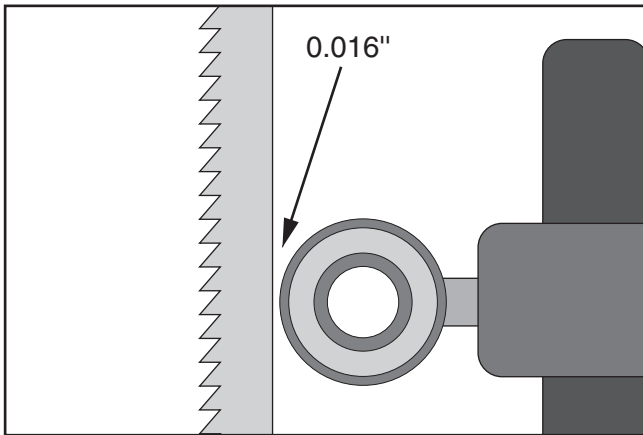


Figure 24. Bearing positioned 0.016" away from back of blade.

- Tighten adjustment cap screw to lock support bearing in place.

Note: When securing adjustment of lower support bearing, make sure it is parallel to blade.

Adjusting Blade Guide Bearings

The blade guide bearings can be adjusted left-to-right, as well as front-to-back, relative to the blade. Properly adjusted blade guide bearings provide side-to-side support, from just behind the gullets to the back of the blade, to help keep the blade straight while cutting.

There are blade guide bearings on the upper and lower blade guide assemblies. Both adjust in the same manner. The following instructions refer to the upper guide bearings.

Important: Make sure the blade is tracking and tensioned correctly before performing this procedure (see **Tensioning Blade** on **Page 21**).

Item(s) Needed	Qty
Hex Wrenches 2.5, 4mm.....	1 Ea.
Flathead Screwdriver.....	1

To adjust blade guides:

- DISCONNECT MACHINE FROM POWER!
- Loosen guide block cap screw shown in **Figure 25**, then laterally position guide bearings just behind blade gullets, as illustrated in **Figure 26**, then re-tighten cap screw to secure setting.

Note: The guide bearings should be positioned behind the gullets a distance equal to that of the support bearing behind the blade (see **Page 22** for reference).

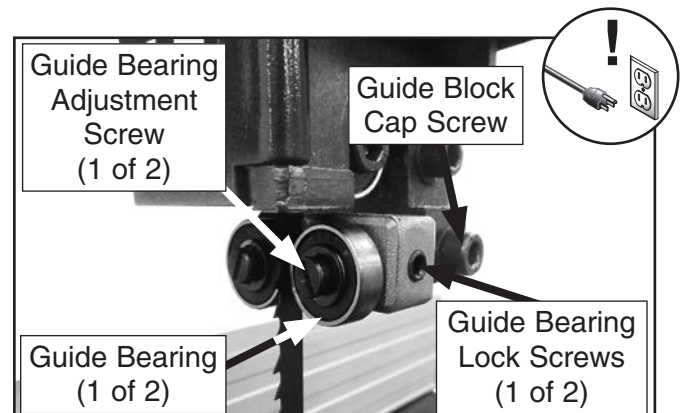


Figure 25. Upper guide bearing components.



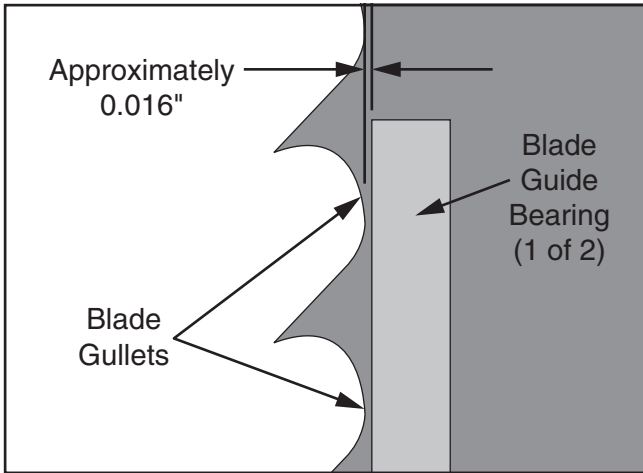


Figure 26. Blade guide bearing positioned just behind blade gullets.

Note: With wider blades, it may not be possible to bring the guide bearings just behind the blade gullets. Position them as far forward as possible without allowing the guide bearing housing to touch the back of the blade.

NOTICE

Blade teeth are angled out slightly, protruding wider than the blade thickness; this is known as blade "tooth set" (see Figure 27). If teeth contact guide bearings during operation, damage may occur. Therefore, the support bearing must be set to prevent teeth from contacting guide bearings during operation (refer to Page 22 for details).

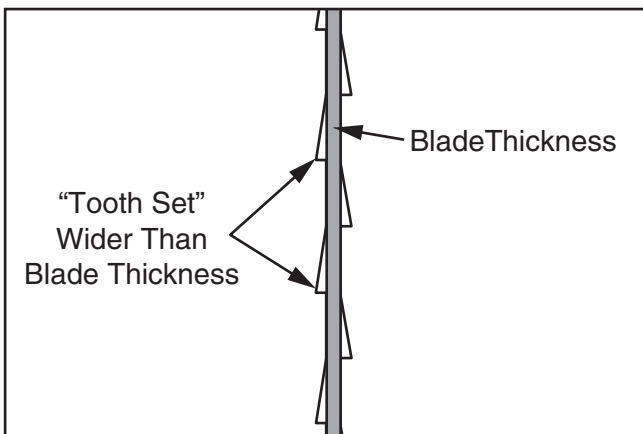


Figure 27. Illustration of blade "tooth set".

3. Loosen guide bearing lock screws (see **Figure 25** on **Page 23**).
4. Loosen both guide bearing adjustment screws (see **Figure 25** on **Page 23**), then position guide bearings so they evenly and lightly touch sides of blade (see illustration in **Figure 28**) without deflecting it one way or the other.

Note: When the blade guide bearings are properly adjusted against the blade, they should lightly rotate as the blade moves.

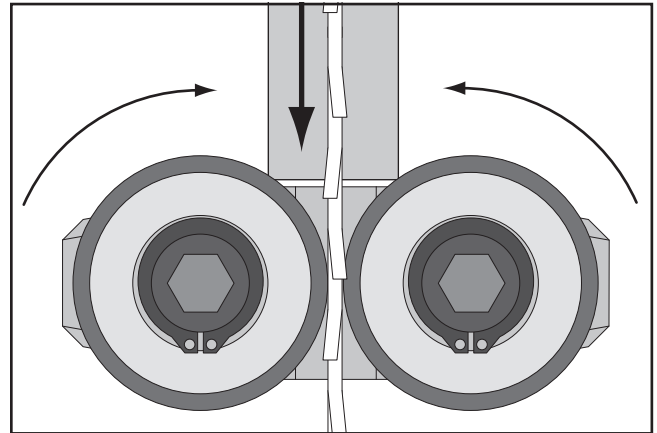


Figure 28. Blade guide bearings evenly and lightly touching the sides of the blade.

5. Tighten guide bearing lock screws.
6. Re-tighten cap screws to secure settings. Re-check the setting after tightening.

NOTICE

Whenever changing blade or adjusting blade tension or tracking, the support and guide bearings must be re-adjusted before resuming operation to ensure proper blade support.



Aligning Table

To ensure cutting accuracy, the table should be aligned so that the miter slot is parallel to the bandsaw blade.

Item(s) Needed	Qty
Precision Straightedge	1
Precision Ruler	1
Hex Wrench 6mm.....	1

Adjusting Miter Slot Parallelism

1. Make sure blade is tracking properly and correctly tensioned (refer to **Pages 17 & 21**).
2. **DISCONNECT MACHINE FROM POWER!**
3. Place straightedge along blade so it barely touches both front and back of blade without going across a tooth (see **Figure 29**).
4. Measure distance between straightedge and miter slot (see **Figure 29**). Distance should be same at front and back of table.

— If distance *is* same at front and back of table, no adjustment is necessary.

— If distance *is not* same at front and back of table, it must be adjusted; proceed to **Step 5**.

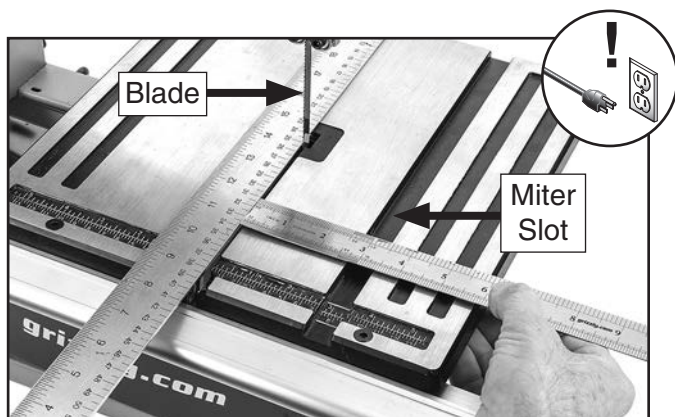


Figure 29. Example of placing a straightedge along blade and measuring to miter slot.

5. Loosen trunnion cap screws that secure table (see **Figure 30**).

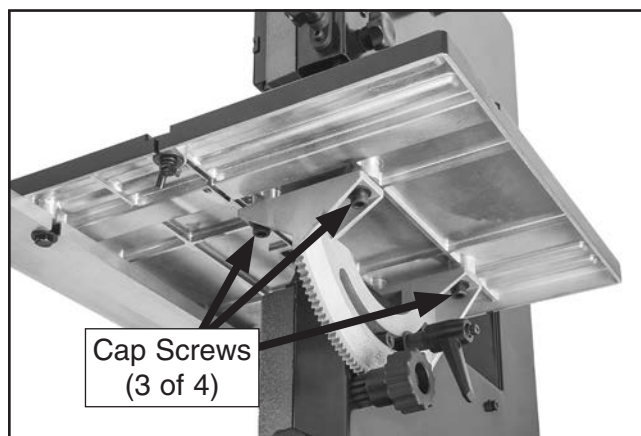


Figure 30. Location of trunnion cap screws.

6. Adjust table until distance between straightedge and miter slot is same at front and back of table.
7. Taking care not to move table, retighten trunnion cap screws, then repeat **Step 4** to verify adjustment.



Aligning Fence

To ensure cutting accuracy, the fence should be aligned parallel with the blade. This is achieved by aligning the fence to the miter slot.

Note: Occasionally, even after aligning the fence, a symptom known as "blade lead" will develop, requiring the fence to be skewed slightly to compensate for the blade lead problem. Refer to **Blade Lead**, beginning on **Page 47** for more information on blade lead and skewing the fence.

Item(s) Needed	Qty
Hex Wrench 4mm.....	1

To align fence:

1. DISCONNECT MACHINE FROM POWER!
2. Make sure table is aligned with blade (see **Adjusting Miter Slot Parallelism** on **Page 25** for instructions).
3. Install fence on right side of blade, aligned with edge of miter slot, then lock it in place.
 - If fence *is* parallel with miter slot, no adjustment is necessary.
 - If fence *is not* parallel with miter slot, proceed to **Step 4**.
4. Remove cover caps and loosen (2) fence adjustment cap screws (see **Figure 31**), adjust fence parallel with miter slot, then re-tighten cap screws to secure setting. Re-install cover caps.

4. Remove cover caps and loosen (2) fence adjustment cap screws (see **Figure 31**), adjust fence parallel with miter slot, then re-tighten cap screws to secure setting. Re-install cover caps.

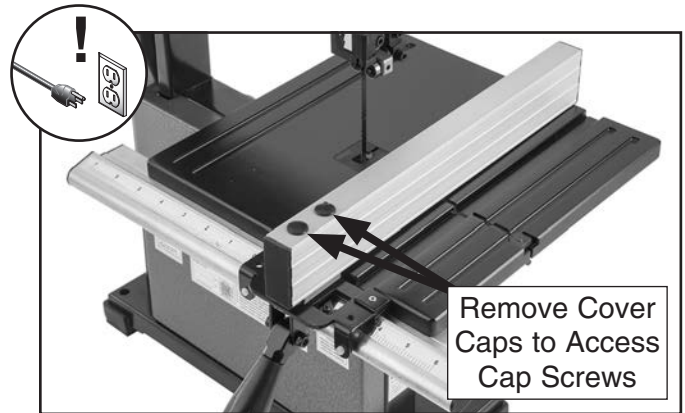


Figure 31. Location of fence adjustment cap screws.





SECTION 4: OPERATIONS

Operation Overview

The purpose of this overview is to provide the novice machine operator with a basic understanding of how the machine is used during operation, so the machine controls/components discussed later in this manual are easier to understand.

Due to the generic nature of this overview, it is **not** intended to be an instructional guide. To learn more about specific operations, read this entire manual, seek additional training from experienced machine operators, and do additional research outside of this manual by reading "how-to" books, trade magazines, or websites.

	<p>!WARNING To reduce your risk of serious injury, read this entire manual BEFORE using machine.</p>
--	--

<p>!WARNING To reduce risk of eye injury from flying chips or lung damage from breathing dust, always wear safety glasses and a respirator when operating this machine.</p>	
	

<p>NOTICE If you are not experienced with this type of machine, WE STRONGLY RECOMMEND that you seek additional training outside of this manual. Read books/magazines or get formal training before beginning any projects. Regardless of the content in this section, Grizzly Industrial will not be held liable for accidents caused by lack of training.</p>
--

To complete a typical operation, the operator does the following:

1. Examines the workpiece to make sure it is suitable for cutting.
2. Adjusts the table tilt, if necessary, to the correct angle of the desired cut.
3. If using the fence, adjusts it for the width of the cut and then locks it in place. If using the miter gauge, adjusts the angle and locks it in place.
4. Loosens the guide post lock knob, adjusts the upper blade guide height to just clear the workpiece (no more than 1/4"), then re-tightens the guide post lock knob.
5. Checks to make sure the workpiece can safely pass all the way through the blade without interference from other objects.
6. Puts on safety glasses and a respirator.
7. Starts the dust collector and bandsaw.
8. If necessary, turns on laser sight.
9. Holds the workpiece firmly and flatly against both the table and fence (or miter gauge), and then pushes the workpiece into the blade at a steady and controlled rate until the cut is complete.
10. Turns off laser sight (if necessary) and stops the bandsaw.

The operator is very careful to keep fingers away from the blade and uses a push stick to feed narrow workpieces.



A properly adjusted bandsaw can be safer to operate than most other saws and performs many types of cuts with ease and accuracy. It is capable of performing the following types of cuts:

Straight Cuts

- Mitters
- Angles
- Compound Angles
- Resawing
- Ripping
- Crosscutting

Irregular Cuts

- Simple and Complex Curves
- Duplicate Parts
- Circles
- Beveled Curves

Basic Cutting Tips

Here are some basic tips to follow when operating the bandsaw:

- Replace, sharpen, and clean blades often for best performance. Check guides, tension, and alignment settings periodically and adjust when necessary to keep the saw running in top condition.
- Use light and even pressure while cutting. Light feeding pressure makes it easier to cut straight and prevents undue friction or strain on the bandsaw components and the blade.
- Avoid twisting the blade when cutting around tight corners. Allow the blade to saw its way around the corners. Always use relief cuts when possible.
- Misusing the saw or using incorrect techniques (e.g. twisting the blade with the workpiece, incorrect feed rate, etc.) is unsafe and results in poor cuts.

Disabling Switch

The switch can be disabled by removing the key, as shown below. Disabling the switch in this manner can prevent unauthorized operation of the machine, which is important if it is not kept inside an access-restricted building or in a location where children may be present.

IMPORTANT: Disabling the switch only restricts its function. It is not a substitute for disconnecting machine from power when adjusting or servicing.

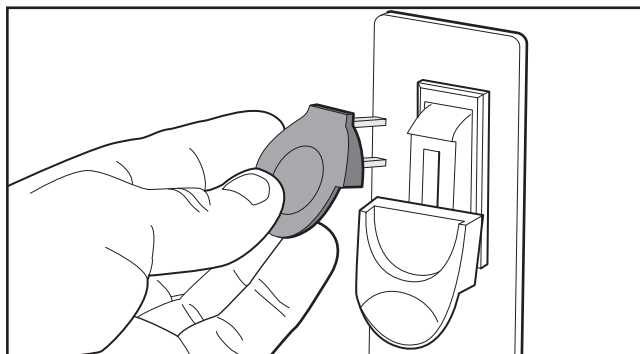


Figure 32. Disabling switch by removing key.

⚠ WARNING

Children or untrained people can be seriously injured by this machine. This risk increases with unsupervised operation. To help prevent unsupervised operation, always disable switch before leaving machine unattended. Make sure to place key in a well-hidden or secure location!



Workpiece Inspection

Some workpieces are not safe to cut or may require modification before they are safe to cut. **Before cutting, inspect all workpieces for the following:**

- **Material Type:** This machine is intended for cutting natural and man-made wood products, laminate covered wood products, and some plastics. Cutting drywall or cementitious backer board creates extremely fine dust and may reduce the life of the bearings. This machine is NOT designed to cut metal, glass, stone, tile, etc.; cutting these materials with a table saw may lead to injury.
- **Foreign Objects:** Nails, staples, dirt, rocks and other foreign objects are often embedded in wood. While cutting, these objects can become dislodged and hit the operator, cause kickback, or break the blade, which might then fly apart. Always visually inspect your workpiece for these items. If they can't be removed, DO NOT cut the workpiece.
- **Large/Loose Knots:** Loose knots can become dislodged during the cutting operation. Large knots can cause kickback and machine damage. Choose workpieces that do not have large/loose knots or plan ahead to avoid cutting through them.
- **Wet or "Green" Stock:** Cutting wood with a moisture content over 20% causes unnecessary wear on the blades, increases the risk of kickback, and yields poor results.
- **Excessive Warping:** Workpieces with excessive cupping, bowing, or twisting are dangerous to cut because they are unstable and often unpredictable when being cut. DO NOT use workpieces with these characteristics!
- **Minor Warping:** Workpieces with slight cupping can be safely supported if the cupped side is facing the table or the fence. On the contrary, a workpiece supported on the bowed side will rock during a cut and could cause kickback or severe injury.

Setting Upper Blade Guide Height

When cutting, the blade guides must always be positioned so they just clear (no more than 1/4") the workpiece. The guide post, shown in **Figure 33**, allows the upper blade guide assembly to be quickly adjusted for height.

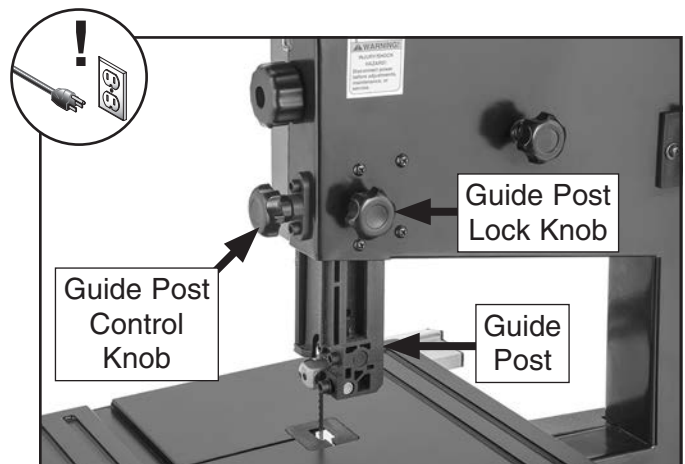


Figure 33. Guide post, lock, and control knobs.

To adjust height of upper blade guides:

1. DISCONNECT MACHINE FROM POWER!
2. Loosen guide post lock knob.
3. Using guide post control knob, adjust height of the guide post so that blade guide assembly just clears (no more than 1/4") workpiece.
4. Re-tighten lock knob to secure setting.



Tilting Table

The table can be tilted to make angled or beveled cuts. A simple tilt scale is provided on the trunnion for a quick gauge (see **Figure 34**). For more accurate results use a protractor.

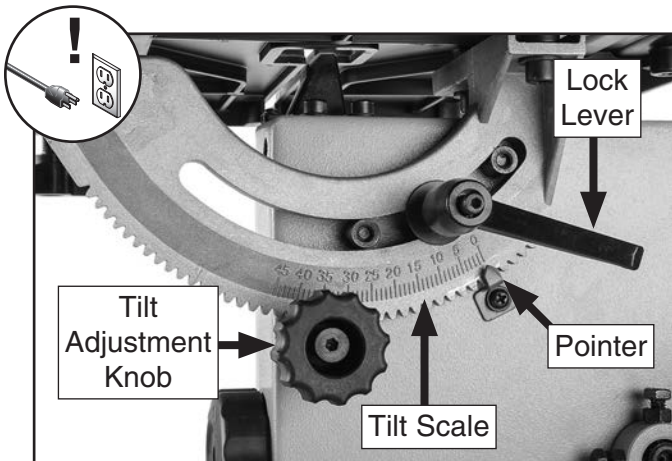


Figure 34. Table tilt controls.

To tilt the table:

1. DISCONNECT MACHINE FROM POWER!
2. Loosen table lock lever shown in **Figure 34**.
3. Rotate tilt adjustment knob until table reaches desired angle, then re-tighten lock lever.

Choosing Blades

Blade Dimensions

Length Range..... $61^{13}/16$ – $62^{3}/16$ "
 Width Range..... $1/8$ "– $3/8$ "

Selecting the right blade requires a knowledge of the various blade characteristics to match the blade with the particular cutting operation.

Blade Length

Measured by the circumference, blade lengths are usually unique to the brand of your bandsaw and the distance between wheels. Blades will vary slightly even in the same length because of how they are welded. Refer to the **Accessories** section later in this manual for blade replacements from Grizzly.

Blade Width

Measured from the back of the blade to the tip of the blade tooth (the widest point), blade width is often the first consideration given to blade selection. Blade width dictates the largest and smallest curve that can be cut, as well as how accurately it can cut a straight line.

Always pick the size of blade that best suits your application.

- **Curve Cutting:** Use the chart in **Figure 35** to determine the correct blade for curve cutting. Determine the smallest radius curve that will be cut on your workpiece and use the corresponding blade width.

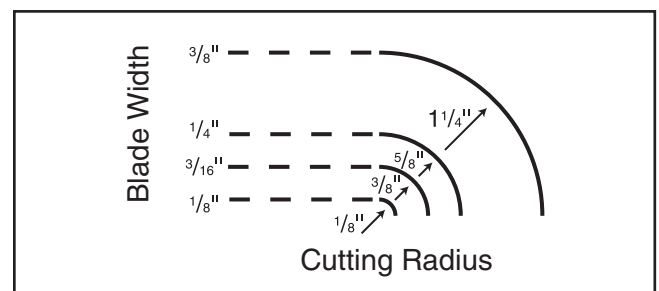


Figure 35. Recommended cutting radius per blade width.



- **Straight Cutting:** Use the largest width blade that you own. Large blades excel at cutting straight lines and are less prone to wander.

Tooth Style

Figure 36 illustrates the three main blade tooth styles:

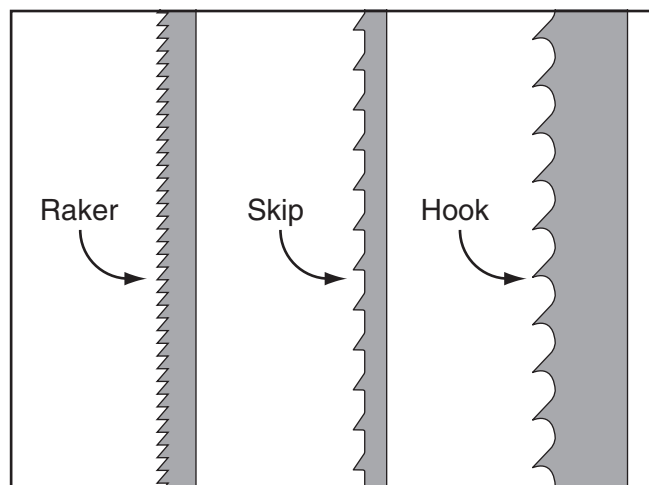


Figure 36. Main blade tooth styles.

- **Raker:** Considered to be the standard because the tooth size and shape are the same as the tooth gullet. The teeth on raker blades usually are very numerous, have no angle, and produce cuts by scraping the material. As a result, smooth cuts can be achieved without cutting fast or generating more heat than other tooth types.
- **Skip:** Similar to a raker blade that is missing every other tooth. Because of the design, skip toothed blades have a much larger gullet than raker blades, and therefore, cut faster and generate less heat. However, these blades also leave a rougher cut than raker blades.
- **Hook:** The teeth have a positive angle (downward) which makes them dig into the material, and the gullets are usually rounded for easier waste removal. These blades are excellent for the tough demands of resawing and ripping thick material.

Tooth Pitch

Measured as TPI (teeth per inch), tooth pitch determines the number of teeth. More teeth per inch (fine pitch) will cut slower, but smoother; while fewer teeth per inch (coarse pitch) will cut rougher, but faster. As a general rule, choose blades that will have at least three teeth in the material at all times. Use fine-pitched blades on harder woods and coarse-pitched blades on softer woods.

Blade Care

A bandsaw blade is a thin piece of steel that is subjected to tremendous stresses when cutting. You can obtain longer use from a bandsaw blade if you give it fair treatment and always use the appropriate feed rate for your operation. Be sure to select blades with the proper width, style, and pitch for each application. The wrong choice of blades will often produce unnecessary heat which will shorten the life of your blade.

A clean blade will perform much better than a dirty blade. Dirty or gummed up blades pass through the cutting material with much more resistance than clean blades. This extra resistance also causes unnecessary heat. Resin/pitch cleaners are excellent for cleaning dirty blades.

Blade Breakage



Many conditions may cause a bandsaw blade to break. Blade breakage is unavoidable, in some cases, since it is the natural result of the peculiar stresses that bandsaw blades are subjected to. Blade breakage is also due to avoidable circumstances. Avoidable breakage is most often the result of poor care or judgement on the part of the operator when mounting or adjusting the blade or blade guides.



The most common causes of blade breakage are:

- Faulty alignment/adjustment of the guides.
- Forcing/twisting a wide blade around a short radius.
- Feeding the workpiece too fast.
- Dull teeth or damaged tooth set.
- Over-tensioned blade.
- Upper blade guide assembly set too high above the workpiece.
- Using a blade with a lumpy or improperly finished braze or weld.
- Continuously running the bandsaw when not in use.
- Leaving blade tensioned when not in use.
- Using the wrong TPI for the workpiece thickness. (The general rule of thumb is three teeth in the workpiece at all times.)

Changing Blade

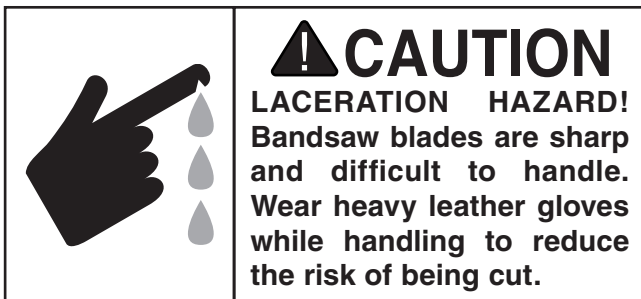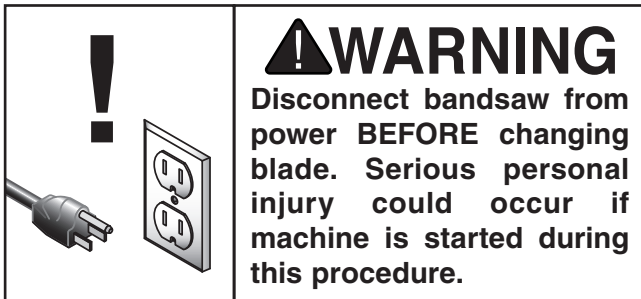

To change the blade:

1. DISCONNECT MACHINE FROM POWER!
2. Move blade tension quick-release lever to left to release blade tension.
3. Adjust upper blade guide assembly all the way up, and move blade guides completely away from blade.

4. Remove miter gauge, fence, wing bolt, lock washer, flat washer, and D-nut from table.
5. Open upper and lower wheel covers.
6. Put on heavy leather gloves.
7. Slip blade off of wheels, slide it through table slot (see **Figure 37**), and remove it from machine.

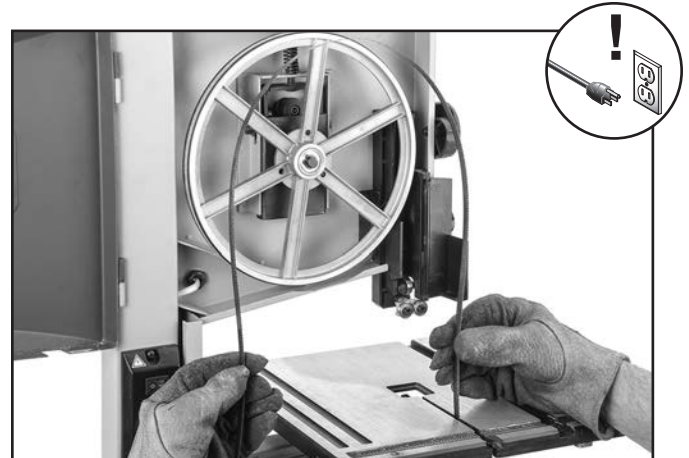


Figure 37. Example of removing blade.

8. Position new blade so teeth are facing you and pointing down in your right hand, then slide it through table slot.

Note: *If the teeth will not point downward in any orientation, the blade is inside out. Remove the blade and twist it right-side out.*

9. Slip blade over wheels while making sure it is properly positioned between blade guards and guides.
10. Engage blade tension quick-release lever, then tension blade (see **Tensioning Blade** on **Page 21** for details).
11. Adjust blade tracking (see **Blade Tracking** on **Page 17**).
12. Adjust upper/lower support bearings and blade guides (see **Adjusting Blade Support Bearings** on **Page 22**).
13. Close wheel covers and re-install fence components removed in **Step 4**.
14. Make sure fence is parallel to miter slot and, if necessary, adjust alignment (see **Page 26**).



Ripping

"Ripping" means cutting with the grain of the wood stock. For plywood and other processed wood, ripping simply means cutting down the length of the workpiece. Beveled rip cuts may be performed by tilting the table.

To make a rip cut:

1. Adjust fence to match width of cut on your workpiece, then lock fence in place.
2. Adjust blade guide assembly to proper height above workpiece.
3. After all safety precautions have been met, turn bandsaw **ON** and wait for it to come to full speed. Slowly feed workpiece into blade until blade is completely through workpiece. **Figure 38** shows an example of a ripping operation.

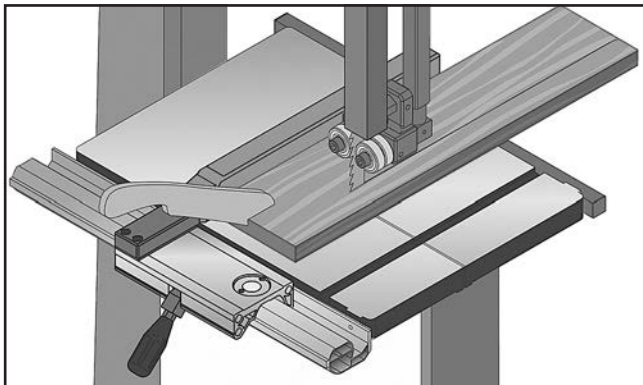


Figure 38. Example of a ripping operation.

!WARNING

ALWAYS use a push stick when ripping narrow pieces. Failure to follow these warnings may result in amputation or laceration injuries!

!WARNING

NEVER place fingers or hands in the line of cut. If you slip, your hands or fingers may go into the blade and may be cut.

Crosscutting

Crosscutting is the process of cutting across the grain of wood. For plywood and other processed wood, crosscutting simply means cutting across the width of the material. Crosscuts can be 90° or angled using the miter gauge. Compound crosscuts are those where the miter is angled and the table tilted.

To make a crosscut:

1. Mark workpiece on edge where you want to begin cut.
2. Adjust the blade guide assembly to the correct height.
3. Adjust the miter gauge to the correct angle needed for cut.
4. Move fence out of the way. Place workpiece evenly against miter gauge, then line up mark with blade.
5. After all safety precautions have been met, turn bandsaw **ON** and wait for it to come to full speed. Slowly feed workpiece into the blade until blade is all the way through workpiece. **Figure 39** shows an example of a crosscutting operation.

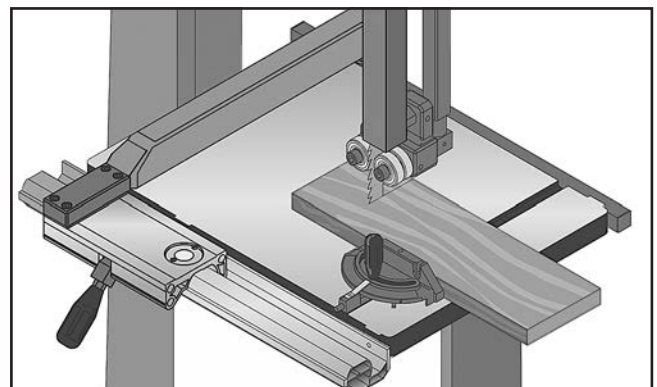


Figure 39. Example of a crosscutting operation with the miter gauge.



Resawing

"Resawing" means cutting the thickness of a board into two or more thinner boards (see **Figure 40** for an example). The maximum height of a board that can be resawn is limited by the maximum cutting height of the bandsaw.

One of the most important considerations for resawing is blade selection—a wide blade cuts straighter and is less prone to blade lead (see the **Blade Lead** subsection later in this manual for more information).

For most applications, use a blade with a hook or a skip tooth style. Choose blades with fewer teeth-per-inch (from 3 to 6 TPI), because they offer larger gullet capacities for clearing sawdust, which reduces heat buildup and strain on the motor.

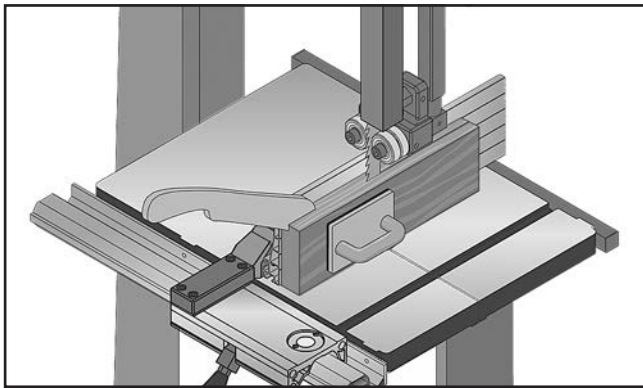


Figure 40. Example of a resawing operation.

⚠WARNING

When resawing thin pieces, a wandering blade (blade lead) can tear through the side of the workpiece, exposing your hands to the blade teeth. Always use push blocks when resawing and keep your hands clear of the blade.

Cutting Curves

When cutting curves, simultaneously feed and turn the stock carefully so the blade follows the layout line without twisting. If curves are sharp or tight, use a narrower blade with more TPI (teeth per inch) and make relief cuts to avoid having to back the workpiece away from the blade.

Always make short cuts first, then proceed to the longer cuts. Relief cuts reduce the chance of the blade being pinched or twisted. Relief cuts are cuts made through the waste portion of the workpiece and are stopped at the layout line, so when you're cutting along the layout line, waste wood is released from the workpiece, alleviating any pressure on the back of the blade. Relief cuts also make it easier to back the workpiece out once the saw blade has come to a stop, if needed.

NOTICE

The list below displays blade widths and the corresponding minimum radii for those blade widths.

Width	Min. Radius
1/8"	1/8"
3/16"	3/8"
1/4"	5/8"
3/8"	1 1/4"



Stacked Cuts

One of the benefits of a bandsaw is its ability to cut multiple copies of a particular shape by stacking a number of workpieces together. However, before making stacked cuts, ensure that the table is perpendicular (90°) to the blade—otherwise, any error in this setting will be compounded in the workpieces.

To complete a stacked cut:

1. Align workpieces from top to bottom.
2. Secure all pieces together in a manner that will not interfere with cutting. Hot glue on the edges works well, as do brad nails through the waste portion. (Be careful not to cut into the brads or you may break the blade!)
3. Lay out the shape you intend to cut on face of top piece.

4. Make relief cuts perpendicular to outline of your intended shape in areas where changes in blade direction could strain woodgrain or cause blade to bind.
5. Cut stack of pieces as though you were cutting a single piece. Follow your layout line with blade kerf on the waste side of your line (see **Figure 41** for an example of a stacked cut setup).

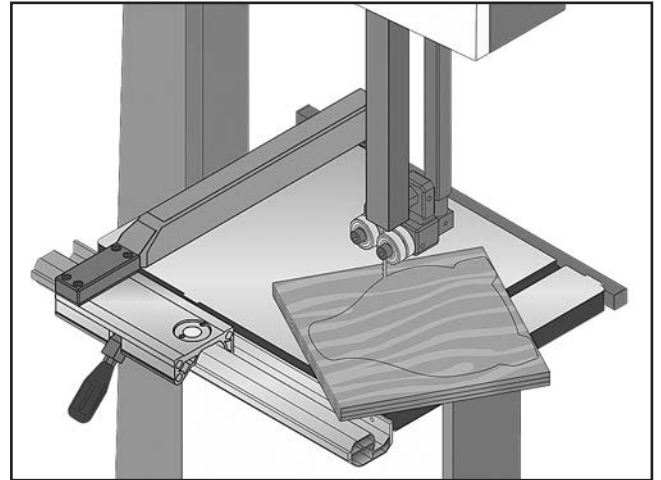


Figure 41. Example of a stacked cut setup.



SECTION 5: ACCESSORIES

! WARNING

Installing unapproved accessories may cause machine to malfunction, resulting in serious personal injury or machine damage. To reduce this risk, only install accessories recommended for this machine by Grizzly.

NOTICE

Refer to our website or latest catalog for additional recommended accessories.

Grizzly 62" Bandsaw Blades

MODEL	LENGTH	WIDTH	TPI	GAUGE
G9170	62"	1/4"	6 Hook	0.014
G9171	62"	1/4"	14 Raker	0.014
G9172	62"	1/4"	24 Raker	0.014
G9173	62"	3/8"	6 Hook	0.014
G9174	62"	3/8"	14 Raker	0.014

T26403—The Missing Shop Manual: Bandsaw

Dedicated to providing integral information about woodworking tools and techniques that other manuals overlook, the books in this series contain safety facts, explanations about basic project set up, and tips for maximizing tool performance. In Bandsaw, you will learn how to best utilize this essential workshop tool. Filled with clear diagrams and instructions, this pocket sized durable manual is ideal for quick reference in the workshop. 112 pages, soft cover.

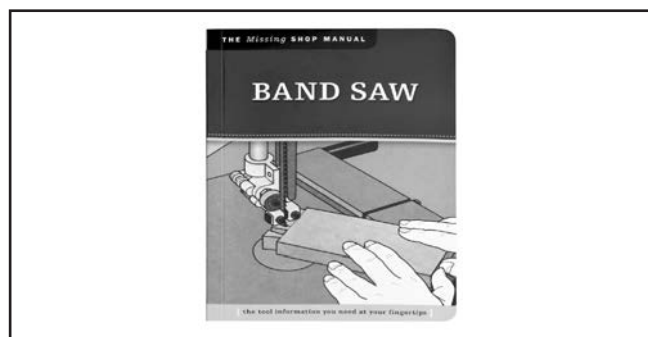


Figure 42. The Missing Shop Manual: Bandsaw.

Timberwolf® 62" Bandsaw Blades

Timber Wolf® Band Mill Blades are high performance bands. The exclusive use of low tensioned, high ductile Swedish silicon steel, unique geometric gullet designs and sets, unique manufacturing processes and quality control has resulted in the production of the finest bandsaw blades in the world. High Performance (HP) and Raker (RK) blades are specifically designed for detail work in 1" and smaller kiln dried wood when a very clean finish is required. They are also effective in plywood and other woods where tear-out is a concern as well as the cutting of soft metals. Positive Claw (PC) blades are everything a wood cutting blade was meant to be. They have over 60% of the speed capabilities of a hook style blade with "hook" style gullet geometry and fast chip removal, while giving you the great finish of a skip. Alternate set (AS-S) blades are specifically designed for straight-line resawing in very expensive, thick woods. These blades utilize the thinnest kerf possible and provide a super finish when speed is not a concern. You cannot go wrong with these blades.

MODEL	LENGTH	WIDTH	TPI	GAUGE
H8501	62"	1/4"	4 Pos Claw	0.025
H8502	62"	1/4"	6 Pos Claw	0.025
H8503	62"	1/4"	10 Raker	0.025
H8504	62"	3/8"	4 Pos Claw	0.025
H8505	62"	3/8"	6 Pos Claw	0.025
H8506	62"	3/8"	10 Raker	0.025

order online at www.grizzly.com or call 1-800-523-4777



- G0710—1HP Wall-Mount Dust Collector**
- G1163P—1HP Floor Model Dust Collector**
- G3591—30 Micron Replacement Bag**
- H4340—3.0 Micron Upgrade Bag**

Excellent point-of-use dust collectors that can be used next to the machine with only a small amount of ducting. Specifications: 450 CFM, 7.2" static pressure, 2 cubic foot bag, and 30 micron filter. Motor is 1HP, 110V/220V, 14A/7A.

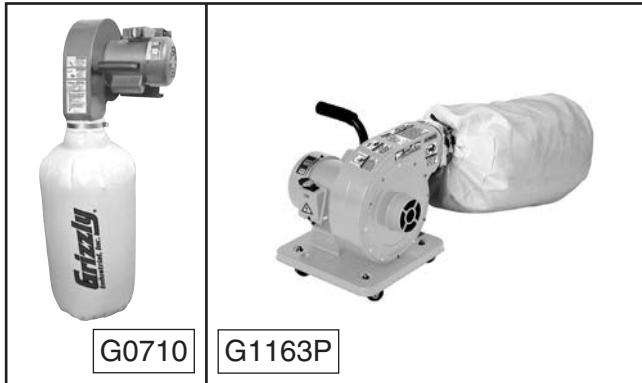


Figure 43. Point-of-use dust collectors.

- W1025—Hose Clamp 2"**
- W1317—Wire Hose Clamp 4"**
- D4226—Dust Collection Reducer 2" x 4" OD**
- D4206—4" x 10' Clear Hose**
- D4202—2' x 10' Clear Hose**
- W1007—Plastic Blast Gate 4"**
- W1053—Anti-Static Grounding Kit**

We've hand picked a selection of dust collection components commonly needed to connect your new machine to basic dust collection.



Figure 44. Dust collection accessories.

- H2499—Small Half-Mask Respirator**
- H3631—Medium Half-Mask Respirator**
- H3632—Large Half-Mask Respirator**
- H3635—Cartridge Filter Pair P100**

If you work around dust everyday, a half-mask respirator can be a lifesaver. Also compatible with safety glasses!



Figure 45. Half-mask respirator with disposable cartridge filters.

Basic Eye Protection

- T20501—Face Shield Crown Protector 4"**
- T20502—Face Shield Crown Protector 7"**
- T20503—Face Shield Window**
- T20451—"Kirova" Clear Safety Glasses**
- T20452—"Kirova" Anti-Reflective S. Glasses**
- T20456—DAKURA Safety Glasses**



Figure 46. Assortment of basic eye protection.

order online at www.grizzly.com or call 1-800-523-4777



T10456—Heavy-Duty Anti-Fatigue Mat 3' x 5'

This Heavy-Duty Anti-Fatigue Mat features beveled edges and no-slip tread for safety and comfort. Open-hole design allows liquid to drain through, so it's perfect for wet or oily conditions. Measures 3' wide x 5' long x 3/8" thick.

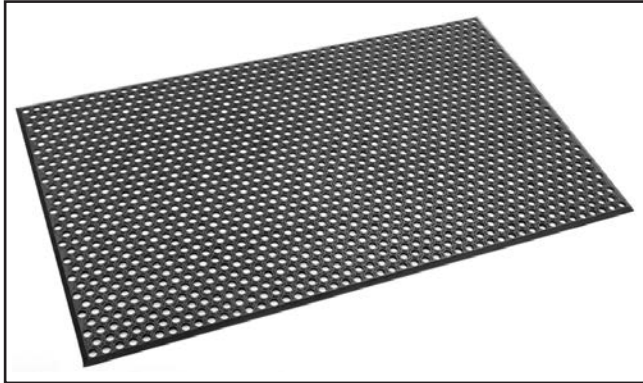


Figure 47. T10456 Anti-Fatigue Mat.

D2056—Tool Table

Get that bench-top tool off your bench and put it on this sturdy stand instead! Flared legs and adjustable rubber feet ensure stability and reduce machine vibration. Butcher block finish table top measures 1" x 13" x 23" and is 30-1/2" from the floor. Bottom measures 21" x 32". 700 lb. Capacity!



Figure 48. D2056 Tool Table.

D2273—Single Roller Stand

This super heavy-duty roller stand features convenient hand knobs for fast height adjustment. Invaluable for supporting work on machines of varying heights. Adjusts from 26 5/8" to 45".



Figure 49. D2273 Single Roller Stand

D3197—24" Aluminum Ruler with Handle

D2828—12" Stainless Steel Ruler

T25676—6" Stainless Steel Rule

G9639—90° Wide Base Square 2 3/4" x 4"

These high-quality, precision measuring tools are perfect for squaring and aligning your bandsaw table, calibrating the tilt scale, and wheel alignment adjustments.


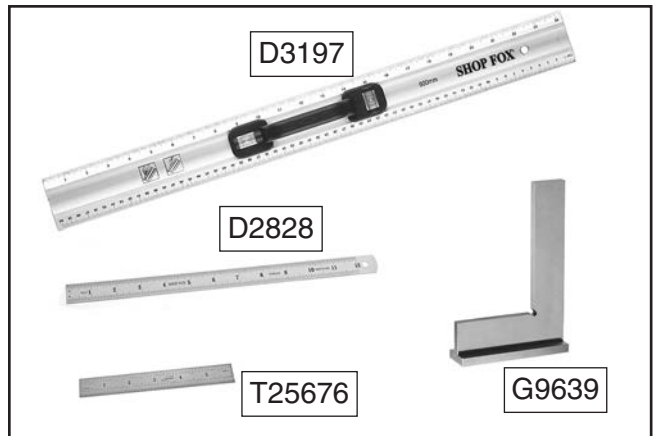


Figure 50. Measuring tools.

order online at www.grizzly.com or call 1-800-523-4777



SECTION 6: MAINTENANCE

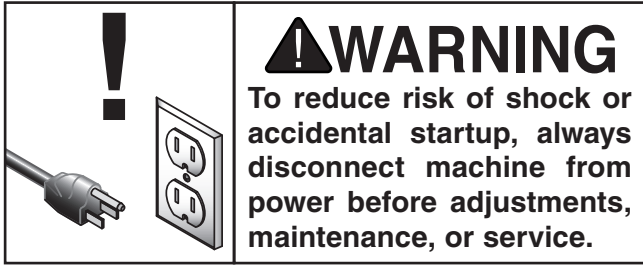

Schedule

For optimum performance from this machine, this maintenance schedule must be strictly followed.

Ongoing

To maintain a low risk of injury and proper machine operation, if you ever observe any of the items below, shut down the machine immediately and fix the problem before continuing operations:

- Loose mounting bolts.
- Damaged saw blade.
- Worn or damaged wires.
- Any other unsafe condition.

Monthly

- Check belt for tension, damage, or wear.
- Remove blade and thoroughly clean all built-up sawdust from the rubber tires on the wheels.
- Clean/vacuum dust buildup from inside cabinet and off motor.

Cleaning & Lubricating

Vacuum excess wood chips and sawdust, and wipe off the remaining dust with a dry cloth. If resin has built up, use a resin dissolving cleaner to remove it.

Once a month, remove the blade and thoroughly clean all built-up sawdust from the rubber tires on the wheels.


If the table becomes difficult to tilt, lubricate the trunnion gear and the slide in the trunnion base.



SECTION 7: SERVICE

Review the troubleshooting procedures in this section if a problem develops with your machine. If you need replacement parts or additional help with a procedure, call our Technical Support. **Note:** *Please gather the serial number and manufacture date of your machine before calling.*


Troubleshooting



Motor & Electrical


Symptom	Possible Cause	Possible Solution
Machine does not start or a breaker trips.	<ol style="list-style-type: none"> 1. Switch disabling key removed. 2. Incorrect power supply voltage or circuit size. 3. Power supply circuit breaker tripped or fuse blown. 4. Wiring open/has high resistance. 5. ON/OFF switch at fault. 6. Motor at fault. 	<ol style="list-style-type: none"> 1. Install switch disabling key. 2. Ensure correct power supply voltage and circuit size. 3. Ensure circuit is sized correctly and free of shorts. Reset circuit breaker or replace fuse. 4. Check/fix broken, disconnected, or corroded wires. 5. Replace switch. 6. Test/repair/replace.
Machine stalls or is underpowered.	<ol style="list-style-type: none"> 1. Workpiece material not suitable for machine. 2. Feed rate/cutting speed too fast. 3. Dull blade. 4. Incorrect blade for task. 5. Workpiece crooked; fence loose or misadjusted. 6. Blade slipping on wheels. 7. Belt slipping. 8. Motor overheated. 9. Run capacitor at fault. 10. Pulley/sprocket slipping on shaft. 	<ol style="list-style-type: none"> 1. Only cut wood/ensure moisture is below 20%. 2. Decrease feed rate/cutting speed. 3. Sharpen/replace blade (Page 32). 4. Use correct blade. 5. Straighten or replace workpiece/adjust fence. 6. Adjust blade tension (Page 21). Clean tires/blade. 7. Clean oil/grease from belt. Tension/replace belt (Pages 43–44); ensure pulleys are aligned. 8. Clean motor, let cool, and reduce workload. 9. Test/repair/replace. 10. Replace loose pulley/shaft.
Machine has vibration or noisy operation.	<ol style="list-style-type: none"> 1. Motor or machine component loose. 2. Blade weld at fault/teeth broken. 3. Belt worn or loose. 4. Motor fan rubbing on fan cover. 5. Motor mount loose/broken. 6. Pulley loose. 7. Machine mounted incorrectly. 8. Motor bearings at fault. 	<ol style="list-style-type: none"> 1. Inspect/replace damaged bolts/nuts, and retighten with thread locking fluid. 2. Replace blade (Page 32). 3. Inspect/replace belt (Page 44). 4. Fix/replace fan cover; replace loose/damaged fan. 5. Tighten/replace. 6. Re-align/replace shaft, pulley set screw, and key. 7. Tighten mounting bolts; relocate/shim machine. 8. Test by rotating shaft; rotational grinding/loose shaft requires bearing replacement.
Laser sight beam diffracted or not illuminating.	<ol style="list-style-type: none"> 1. Debris on lens. 2. Batteries dead. 	<ol style="list-style-type: none"> 1. Wipe lens clean of debris. 2. Replace batteries (Page 48).





Symptom	Possible Cause	Possible Solution
Blade or teeth break/crack.	<ol style="list-style-type: none"> 1. Blade tension incorrect. 2. Blade incorrect for application. 3. Excessive feed rate/pressure. 4. Cutting corners too sharply. 5. Blade dull. 6. Blade tracking wrong. 7. Blade guides adjusted too far forward. 8. Blade guide height in wrong position. 9. Blade weld at fault. 10. Wheel tires worn or incorrectly installed. 11. Fence or miter slot out of alignment with blade. 12. Bad bearings on wheels or guide bearings. 	<ol style="list-style-type: none"> 1. Adjust blade tension (Page 21). 2. Use correct blade for application. 3. Reduce feed rate/pressure. 4. Use a wider arc on outside cuts, or use relief cuts to make tight inside cuts. 5. Replace blade (Page 32). 6. Adjust blade tracking (Page 17). 7. Adjust blade guides for correct blade support (Pages 22–23). 8. Adjust upper blade guide so blade is as close to workpiece as possible (Pages 22–23). 9. Replace blade (Page 32). 10. Replace or re-install tire. 11. Align table and fence with blade (Pages 25–26). 12. Replace wheels and/or guide bearings.
Blade slows, smokes, shows overheating or wears on one side.	<ol style="list-style-type: none"> 1. Too much side pressure when feeding workpiece. 2. Blade contacting table insert. 3. Blade guides worn or misadjusted. 4. Blade has insufficient support. 5. Blade installed backwards or inside out. 6. Wheels out of alignment. 7. Dull or incorrect blade. 8. Blade is bell-mouthed. 9. Fence not parallel with blade. 	<ol style="list-style-type: none"> 1. Feed workpiece straight into blade. 2. Adjust blade guide bearings to eliminate excess side pressure (Pages 22–23). 3. Adjust blade guide bracket. 4. Adjust blade guides as close to workpiece as possible (Pages 22–23). 5. Check blade installation; make sure teeth face front of machine and point down in table throat. Re-install blade if necessary (Page 32). 6. Adjust wheels so they are coplanar (Page 45). 7. Replace blade (Page 32). 8. Replace blade (Page 32). 9. Adjust fence parallelism with blade (Page 26).
Finished workpieces are rough or show scoring.	<ol style="list-style-type: none"> 1. Blade overloaded and twists while cutting. 2. Blade TPI too coarse. 3. Blade loose and fluttering. 4. Blade tracking incorrect. 5. Blade has missing or bent teeth. 6. Blade has a faulty weld. 	<ol style="list-style-type: none"> 1. Decrease feed rate. 2. Use correct blade for material and type of cut. 3. Increase blade tension as required (Page 21). 4. Adjust blade tracking (Page 17). 5. Replace blade (Page 32). 6. Replace blade (Page 32).
Table is hard to tilt.	<ol style="list-style-type: none"> 1. Table tilt lock lever tightened. 2. Sawdust or pitch trapped between trunnion and base. 3. Metal burrs on trunnion. 	<ol style="list-style-type: none"> 1. Loosen table tilt lock lever. 2. Remove sawdust or pitch. 3. Remove burrs.
Miter bar binds in miter slot.	<ol style="list-style-type: none"> 1. Miter slot dirty or gummed up. 2. Miter bar bent. 	<ol style="list-style-type: none"> 1. Carefully clean miter slot. 2. Replace.
Blade tracks incorrectly, or comes off wheels.	<ol style="list-style-type: none"> 1. Tracking is not adjusted properly. 2. Wheels are not coplanar. 3. Blade tension too loose. 4. Blade guides too tight against blade. 5. Feeding workpiece too fast. 6. Incorrect blade for bandsaw. 7. Blade is bell-mouthed, worn, or dull. 8. Wheel tire damaged or worn. 	<ol style="list-style-type: none"> 1. Adjust tracking (Page 17). 2. Adjust wheel coplanarity (Page 45). 3. Increase blade tension (Page 21). 4. Adjust blade guides (Pages 22–23). 5. Feed workpiece slower. 6. Install correct blade. 7. Install new blade (Page 32) and remove tension from blade when not in use. 8. Replace wheel tires.





Symptom	Possible Cause	Possible Solution
Cut is crooked or blade wanders (blade lead).	<ol style="list-style-type: none"> 1. Feeding pressure too high or cutting too fast. 2. Blade tension too loose. 3. Blade dull or damaged. 4. Inadequate blade support. 5. Blade too narrow for cut type. 6. Blade tracking incorrect. 7. Table loose. 8. Fence or miter slot out of alignment with blade. 9. Blade guides or support bearing incorrectly adjusted. 10. Tooth set uneven or teeth sharper on one side than the other. 11. Wrong blade TPI. 12. Blade is following grain of wood. 	<ol style="list-style-type: none"> 1. Adjust feed rate and cutting speed as required. 2. Increase blade tension (Page 21). 3. Replace blade (Page 32). 4. Adjust upper blade guide as close to workpiece as possible (Pages 22–23). 5. Use wider blade. 6. Adjust blade tracking (Page 17). 7. Tighten table trunnion mounting bolts or tilt lock lever. 8. Align table and fence with blade (Pages 25–26). 9. Adjust blade guide bearings and support bearing for correct blade support (Pages 22–23). 10. Replace blade (Page 32). 11. Use a blade with fewer TPI. 12. Increase blade tension (Page 30).
Blade dulls prematurely.	<ol style="list-style-type: none"> 1. Wrong blade TPI. 2. Improper feed pressure. 3. Blade is twisted. 4. Blade is slipping on wheel. 5. Guides hitting teeth. 	<ol style="list-style-type: none"> 1. Use blade with correct TPI. 2. Use correct feed pressure. 3. Replace blade (Page 32). 4. Increase blade tension (Page 30). Clean wheel tire. 5. Adjust blade guide bearings and support bearing (Pages 22–23).
Backside of blade deformation/cracking.	<ol style="list-style-type: none"> 1. Feed pressure too high. 2. Blade tension too high. 3. Incorrect blade guide alignment. 4. Guides are worn. 5. Blade tracking too far back and hitting lip of wheels. 	<ol style="list-style-type: none"> 1. Reduce feed pressure. 2. Adjust blade tension (Page 30). 3. Correct blade guide alignment (Pages 22–23). 4. Replace guides. 5. Adjust tracking (Page 17).
Sawdust buildup inside cabinet.	<ol style="list-style-type: none"> 1. Clogged dust port. 	<ol style="list-style-type: none"> 1. Clean dust port.



Checking/Adjusting Belt Tension

To ensure optimum power transmission from the motor to the blade, the belt must be in good condition and operate under proper tension.

Belt tension should be checked at least every month—more often if the bandsaw is used daily. If the belt shows signs of cracks, fraying, and excessive wear, replace it as instructed in **Replacing Belt** on **Page 44**.

Item(s) Needed	Qty
Hex Wrench 6mm.....	1

Checking Belt Tension

1. DISCONNECT MACHINE FROM POWER!
2. Open lower wheel cover.
3. Check belt condition and deflection. The belt is properly tensioned if there is approximately $\frac{1}{4}$ " deflection. Deflection is checked by pushing belt with moderate pressure, as shown in **Figure 51**, and noting how much it moves.

— If the belt is not properly tensioned, perform the **Adjusting Belt Tension** procedure.

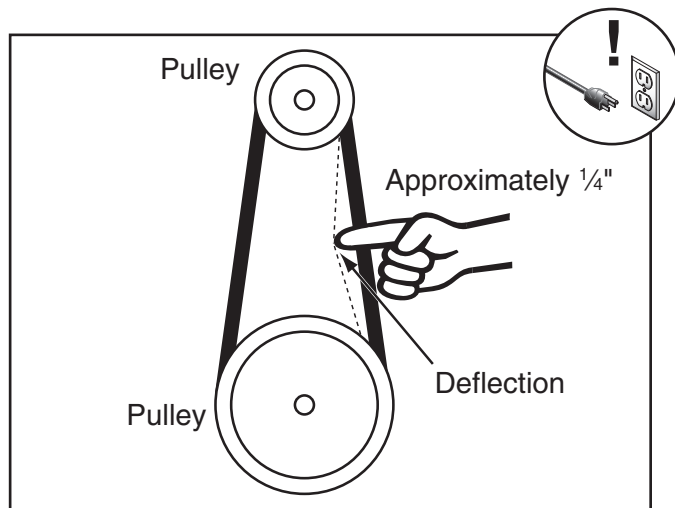


Figure 51. Checking belt tension.

Adjusting Belt Tension

1. DISCONNECT MACHINE FROM POWER!
2. Loosen motor mount cap screws shown in **Figure 52**.

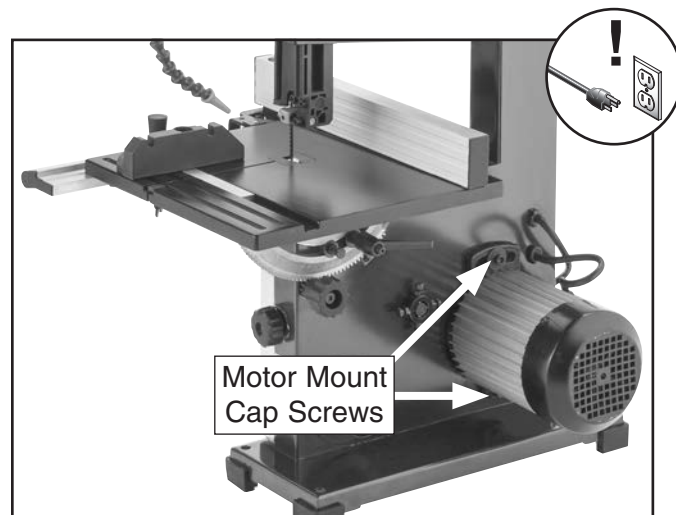


Figure 52. Location of motor mount cap screws used for adjusting belt tension.

3. Push motor to the right (as viewed from back of machine) until you feel moderate tension, then re-tighten both cap screws.
4. Check belt tension. If necessary, repeat **Steps 2–3** until there is approximately $\frac{1}{4}$ " deflection in the belt.
5. Close wheel cover.



Replacing Belt

To ensure optimum power transmission from the motor to the blade, the belt must be in good condition and be properly tensioned.

Replace the belt if it shows signs of cracking, fraying, and excessive wear.

Item(s) Needed	Qty
Hex Wrench 6mm.....	1
Retaining Ring Pliers.....	1
Heavy Leather Gloves (Pair)	1
Replacement Belt (Part # P0803Z068)	1

To replace the belt:

1. DISCONNECT MACHINE FROM POWER!
2. Put on heavy leather gloves and remove blade from machine (refer to **Changing Blade** on **Page 32**).
3. Loosen motor mount cap screws (see **Figure 52** on **Page 43**).
4. Pivot motor to the left (as viewed from back of bandsaw) to release belt tension.
5. Open lower wheel cover and remove belt from motor pulley.

6. Remove external retaining ring from lower wheel shaft (see **Figure 53**) and remove lower wheel.

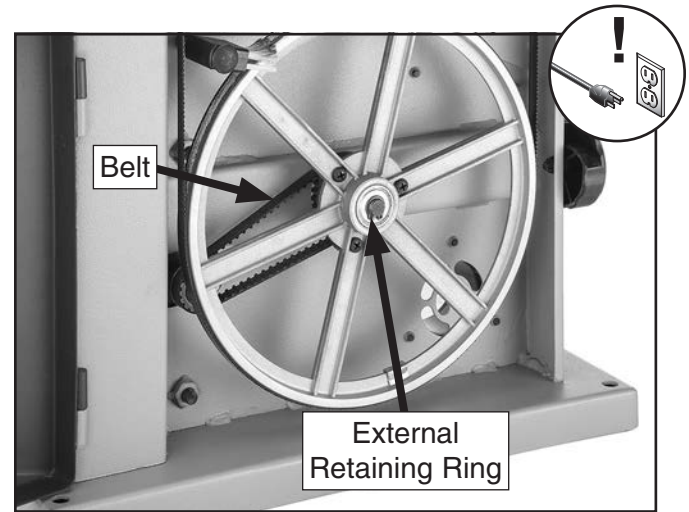


Figure 53. Belt change components inside lower wheel cover.

7. Install new belt on both pulleys, and then re-install wheel and retaining ring.
8. Properly tension belt, as instructed in **Adjusting Belt Tension** on **Page 43**.
9. Replace blade, properly track and tension it (see **Pages 17 & 21**), and then adjust guide and support bearings.



Wheel Alignment

Wheel alignment is important for optimal performance from your bandsaw. Wheels are properly aligned when they are parallel with each other and in the same plane or “coplanar” (see the illustration in the figure to the right).

When wheels are coplanar, the bandsaw is more likely to cut straight without wandering; and vibration, heat, and blade wear are considerably decreased because the blade is automatically balanced on the wheel.

Bringing the wheel into alignment may require a combination of shimming a wheel and adjusting the position of the lower wheel shaft.

Item(s) Needed	Qty
Precision Straightedge 3'.....	1
Fine Ruler.....	1

Checking Wheel Alignment

1. DISCONNECT MACHINE FROM POWER!
2. Remove table.
3. With blade on and properly tensioned, hold a straightedge close to center of both wheels. Make sure straightedge fully extends across the rims of both wheels, as shown in **Figure 54**.

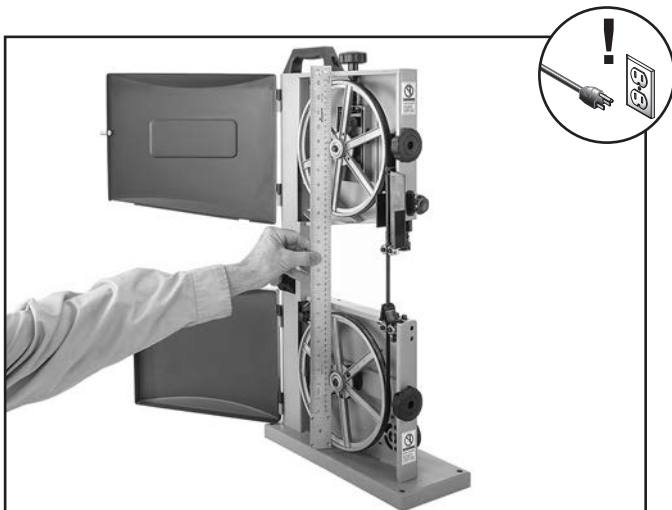


Figure 54. Example of checking if wheels are coplanar.

4. Check wheel alignment, and adjust tracking knob to bring both wheels into alignment as much as possible. If wheels cannot be adjusted coplanar, use **Figure 55** to determine how to proceed with alignment adjustments.

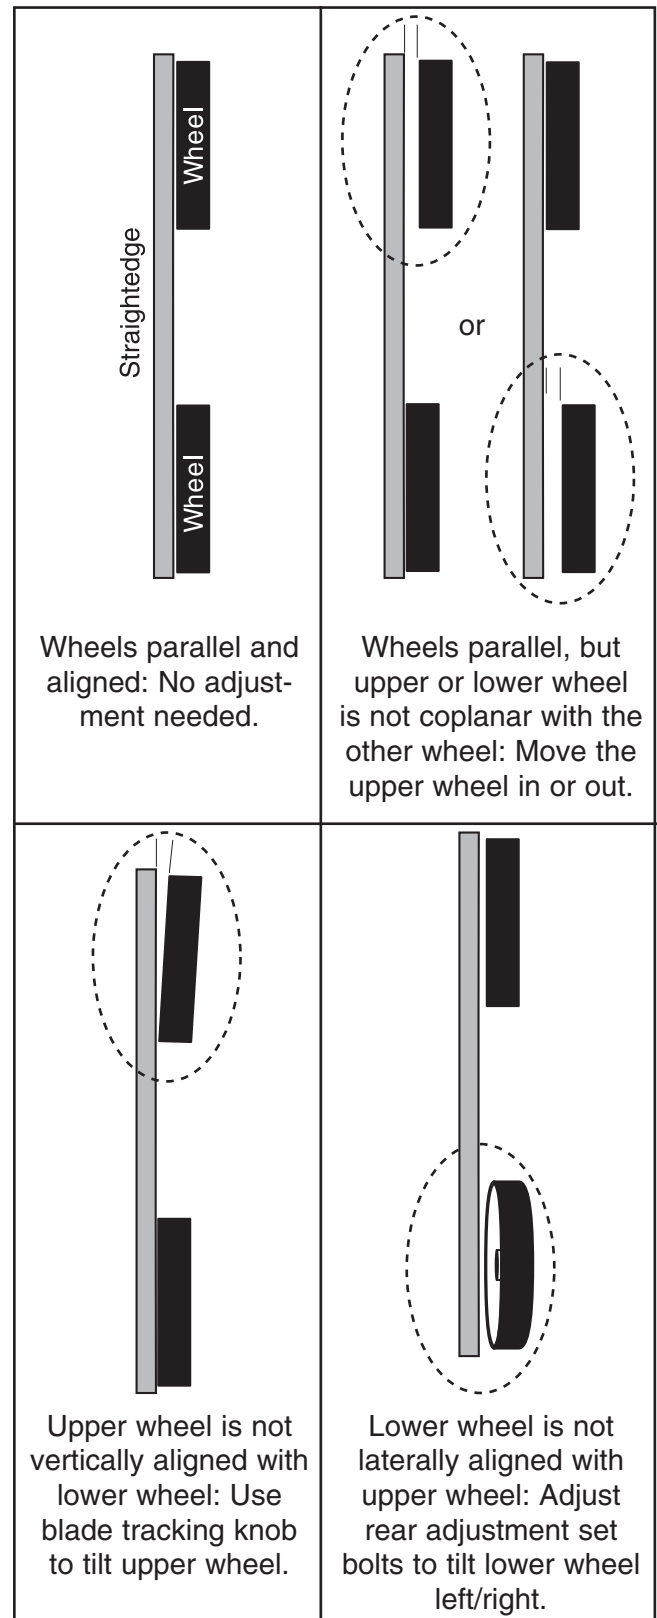


Figure 55. Wheel alignment illustration.



Shimming a Wheel

A wheel that is parallel with the other wheel, but is not coplanar, must be shimmed by the distance that it is not in the same plane with the other wheel.

Tip: *Standard washers work well for shimming the wheel because they can easily be stacked to get the desired height.*

To shim a wheel:

1. DISCONNECT MACHINE FROM POWER!
2. Adjust upper wheel tracking so that it is parallel with lower wheel.
3. With straightedge touching both rims of wheel that does not need to be adjusted, measure the distance away from the other wheel with a fine ruler, as shown in **Figure 56**. The distance measured with the ruler is the distance this wheel must be shimmed.

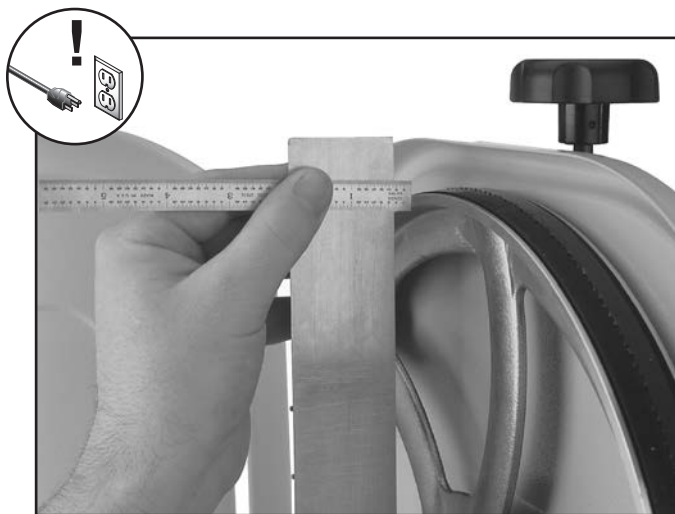


Figure 56. Example of measuring the distance to shim the wheel to be coplanar.

4. Remove blade.
5. Remove wheel to be shimmed. Place as many shims as necessary to correct gap measured in **Step 3** onto wheel shaft.
6. Re-install wheel and secure it in place.
7. Re-install blade and properly tension it.

8. Perform previous **Checking Wheel Alignment** procedure. If necessary to make the wheels parallel, repeat this procedure.
9. The first time you get the wheels coplanar, place a mark on each wheel where you held the straightedge, then use this position again in the future if you need to repeat the procedure. This assures repeated accuracy every time you adjust the wheels.
10. Close wheel covers.

Adjusting Lower Wheel Shaft Position

If the lower wheel is tilted laterally (side to side), perform the following procedure to make it coplanar with the upper wheel.

There are four adjustment bolts with hex nuts in the lower wheel bracket, shown in **Figure 57**, that adjust the wheel tilt from side-to-side and up-and-down.

Note: *If you make a mistake during the following procedure, it can be very difficult to correct. Therefore, it is important to double check wheel alignment (see **Page 45**), and troubleshoot all other possible solutions (see **Troubleshooting on Page 40**) prior to adjusting the lower wheel shaft position.*

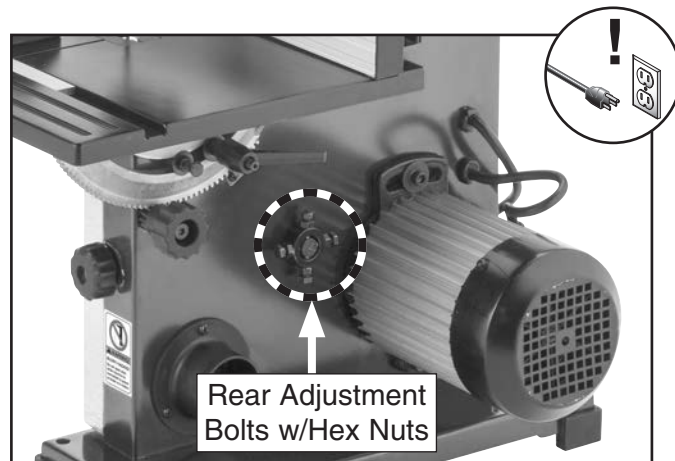


Figure 57. Location of rear lateral adjustment components.

Item(s) Needed	Qty
Precision Straightedge 3'.....	1
Open-End Wrench or Socket 10mm	1



To adjust lower wheel laterally:

1. DISCONNECT MACHINE FROM POWER!
2. Remove fence and table from machine.
3. Check wheels at **A** and **B** locations (see **Figure 58**). The wheels should align.
 - If the wheels do not align, they require lateral adjustment (see **Figure 59**); proceed to **Step 4**.

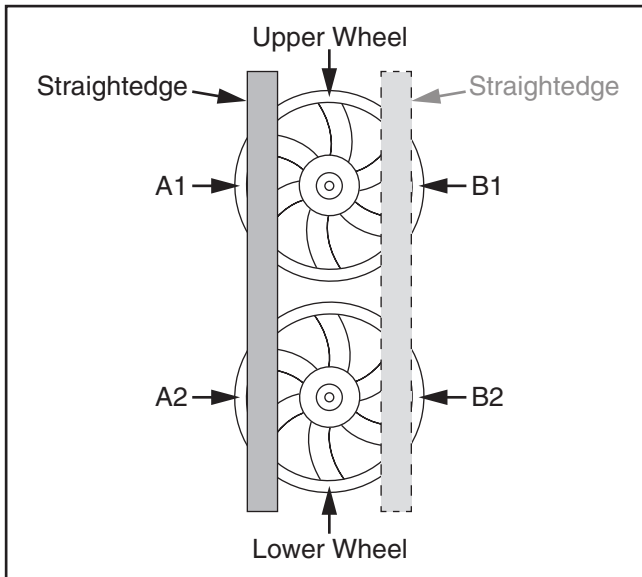


Figure 58. Example of using a straightedge to check lateral wheel alignment.

4. Mark upper and lower wheels with a pencil or marker to indicate measuring locations (see **Figure 58**).

Note: *Marking the wheels ensures more accurate results in case there are irregularities in the wheels.*

5. Loosen hex nuts on rear left and right adjustment bolts (see **Figure 57** on **Page 46**).
6. Rotate left and right adjustment bolts until lower wheel is coplanar with upper wheel, see **Figure 59**.

6. Rotate left and right adjustment bolts until lower wheel is coplanar with upper wheel, see **Figure 59**.

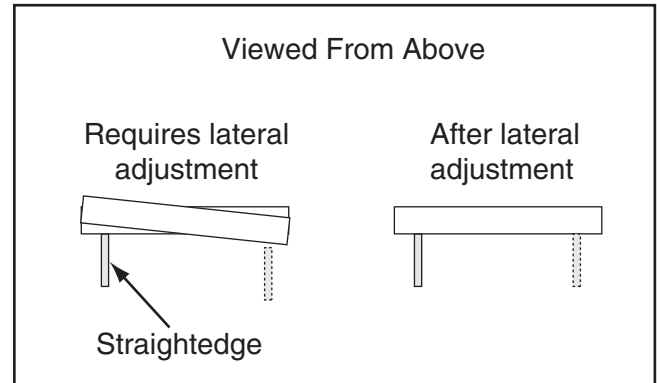


Figure 59. Before and after lateral wheel alignment (viewed from above).

7. Re-tighten hex nuts loosened in **Step 6**.

Blade Lead

Bandsaw blades may wander off the cut line when sawing, as shown in **Figure 60**. This is called blade lead.

Blade lead is usually caused by too fast of a feed rate, a dull or abused blade, or improper blade tension. If your blade is sharp/undamaged, properly tensioned, and you still have blade lead, perform the following procedures.

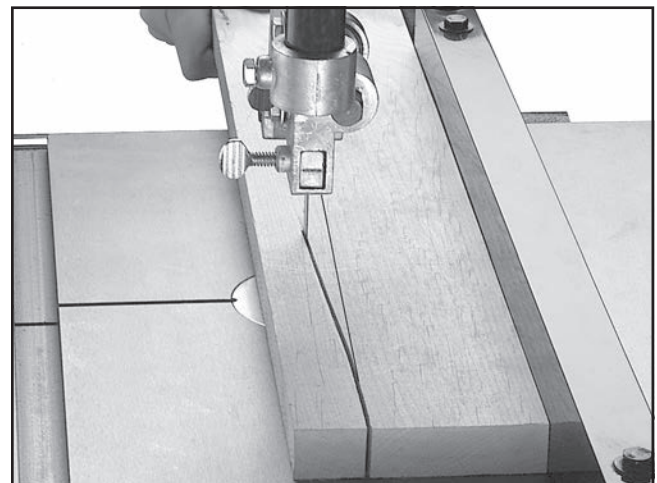


Figure 60. Example of blade lead.

Item(s) Needed	Qty
Hex Wrench 4mm.....	1



To correct blade lead:

1. Make sure blade is properly tensioned and blade guides are adjusted correctly.
2. Use less pressure when feeding workpiece through cut.
3. Make sure miter slot and fence are parallel to blade line (see **Aligning Table** and **Aligning Fence** procedures for detailed information).
4. Perform test cut with bandsaw.
 - If there is still blade lead present, compensate for this condition by skewing the fence or shifting the table, as instructed in the following procedures.

To skew fence:

1. Cut a piece of scrap wood approximately $\frac{3}{4}$ " thick x 3" wide x 17" long. On wide face of board, draw a straight line parallel to long edge.
2. Slide bandsaw fence out of way and cut along the line halfway through the board. Turn bandsaw **OFF** and wait for blade to stop. Do not move board.
3. Clamp board to bandsaw table, then slide fence over to board so it barely touches one end of board.
4. Loosen the two fence adjustment cap screws, skew fence so that it is parallel with scrap piece, then re-tighten cap screws.
5. Make a few cuts using fence.
 - If blade lead is still present, repeat **Steps 1–4** until blade and fence are parallel with each other.

Adjusting Laser Sight

If the laser sight beam does not illuminate directly down the path of the blade, it needs adjustment.

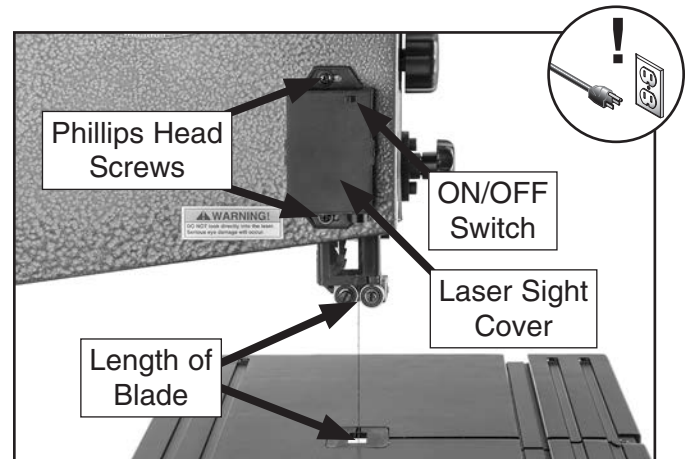


Figure 61. Laser sight components.

Item(s) Needed	Qty
Phillips Screwdriver #1	2

To adjust laser sight:

1. DISCONNECT MACHINE FROM POWER!
2. Loosen Phillips head screws (see **Figure 61**) that secure laser sight to bandsaw body.
3. Turn laser sight **ON** and slightly move laser sight unit until beam illuminates directly down length of blade (see **Figure 61**), then tighten Phillips head screws to secure in position.
4. Turn laser sight **OFF**.

Replacing Laser Sight Batteries

To replace the laser sight batteries, simply open the laser sight cover (see **Figure 61**) and replace the batteries, matching positive and negative terminals. Replace cover when done.

Item(s) Needed	Qty
AA Battery	2



SECTION 8: WIRING

These pages are current at the time of printing. However, in the spirit of improvement, we may make changes to the electrical systems of future machines. Compare the manufacture date of your machine to the one stated in this manual, and study this section carefully.

If there are differences between your machine and what is shown in this section, call Technical Support at (570) 546-9663 for assistance BEFORE making any changes to the wiring on your machine. An updated wiring diagram may be available. **Note:** Please gather the serial number and manufacture date of your machine before calling. This information can be found on the main machine label.

WARNING

Wiring Safety Instructions

SHOCK HAZARD. Working on wiring that is connected to a power source is extremely dangerous. Touching electrified parts will result in personal injury including but not limited to severe burns, electrocution, or death. Disconnect the power from the machine before servicing electrical components!

MODIFICATIONS. Modifying the wiring beyond what is shown in the diagram may lead to unpredictable results, including serious injury or fire. This includes the installation of unapproved after-market parts.

WIRE CONNECTIONS. All connections must be tight to prevent wires from loosening during machine operation. Double-check all wires disconnected or connected during any wiring task to ensure tight connections.

CIRCUIT REQUIREMENTS. You MUST follow the requirements at the beginning of this manual when connecting your machine to a power source.

WIRE/COMPONENT DAMAGE. Damaged wires or components increase the risk of serious personal injury, fire, or machine damage. If you notice that any wires or components are damaged while performing a wiring task, replace those wires or components.

MOTOR WIRING. The motor wiring shown in these diagrams is current at the time of printing but may not match your machine. If you find this to be the case, use the wiring diagram inside the motor junction box.
















CAPACITORS/INVERTERS. Some capacitors and power inverters store an electrical charge for up to 10 minutes after being disconnected from the power source. To reduce the risk of being shocked, wait at least this long before working on capacitors.

EXPERIENCING DIFFICULTIES. If you are experiencing difficulties understanding the information included in this section, contact our Technical Support at (570) 546-9663.

NOTICE

The photos and diagrams included in this section are best viewed in color. You can view these pages in color at www.grizzly.com.

COLOR KEY

BLACK		BLUE		YELLOW		LIGHT BLUE	
WHITE		BROWN		YELLOW GREEN		BLUE WHITE	
GREEN		GRAY		PURPLE		TURQUOISE	
RED		ORANGE		PINK			



Wiring Diagram

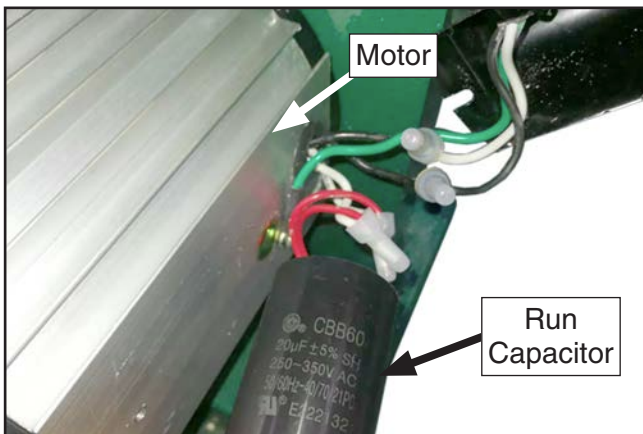
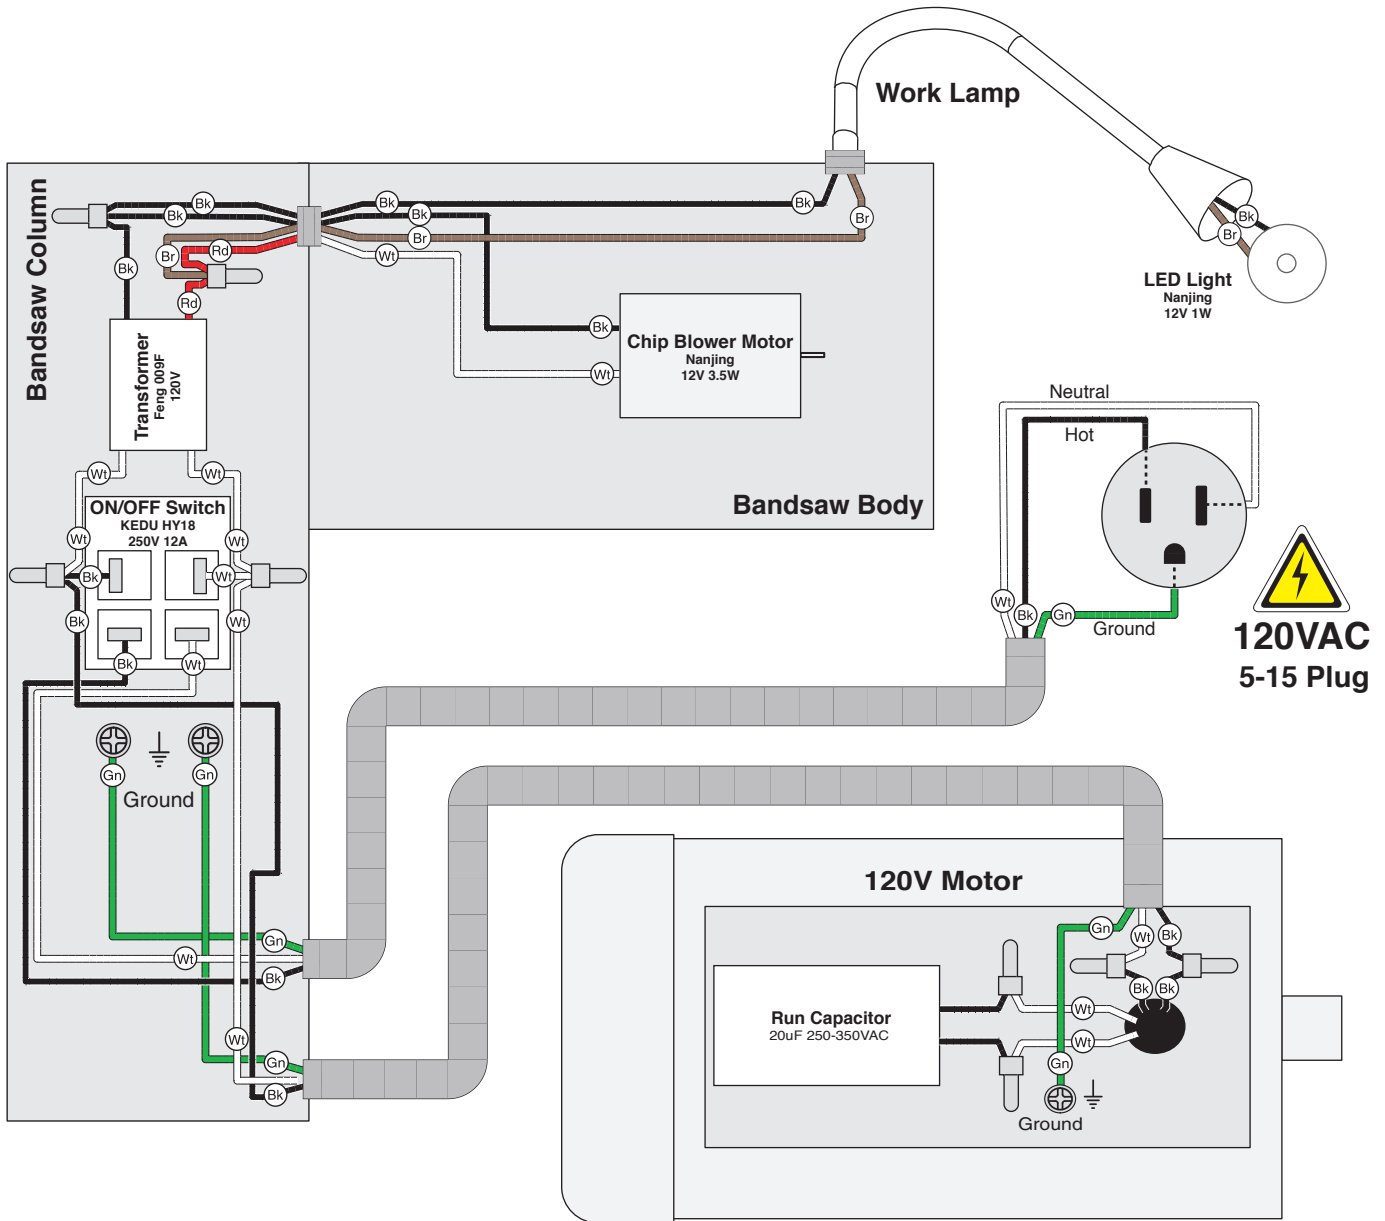


Figure 62. Motor and run capacitor wiring.

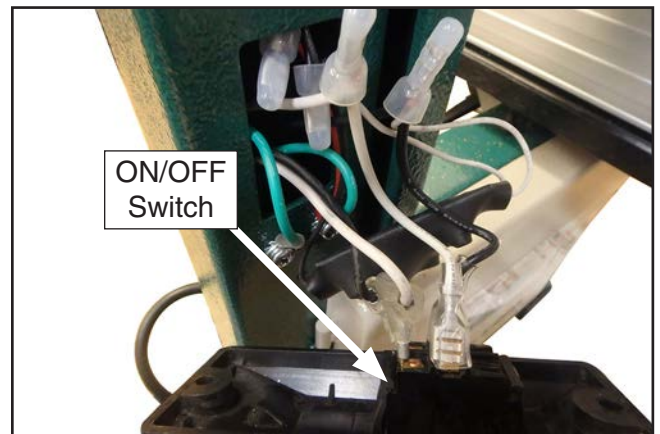



Figure 63. ON/OFF switch wiring.



SECTION 9: PARTS

We do our best to stock replacement parts when possible, but we cannot guarantee that all parts shown are available for purchase. Call (800) 523-4777 or visit www.grizzly.com/parts to check for availability.

Main

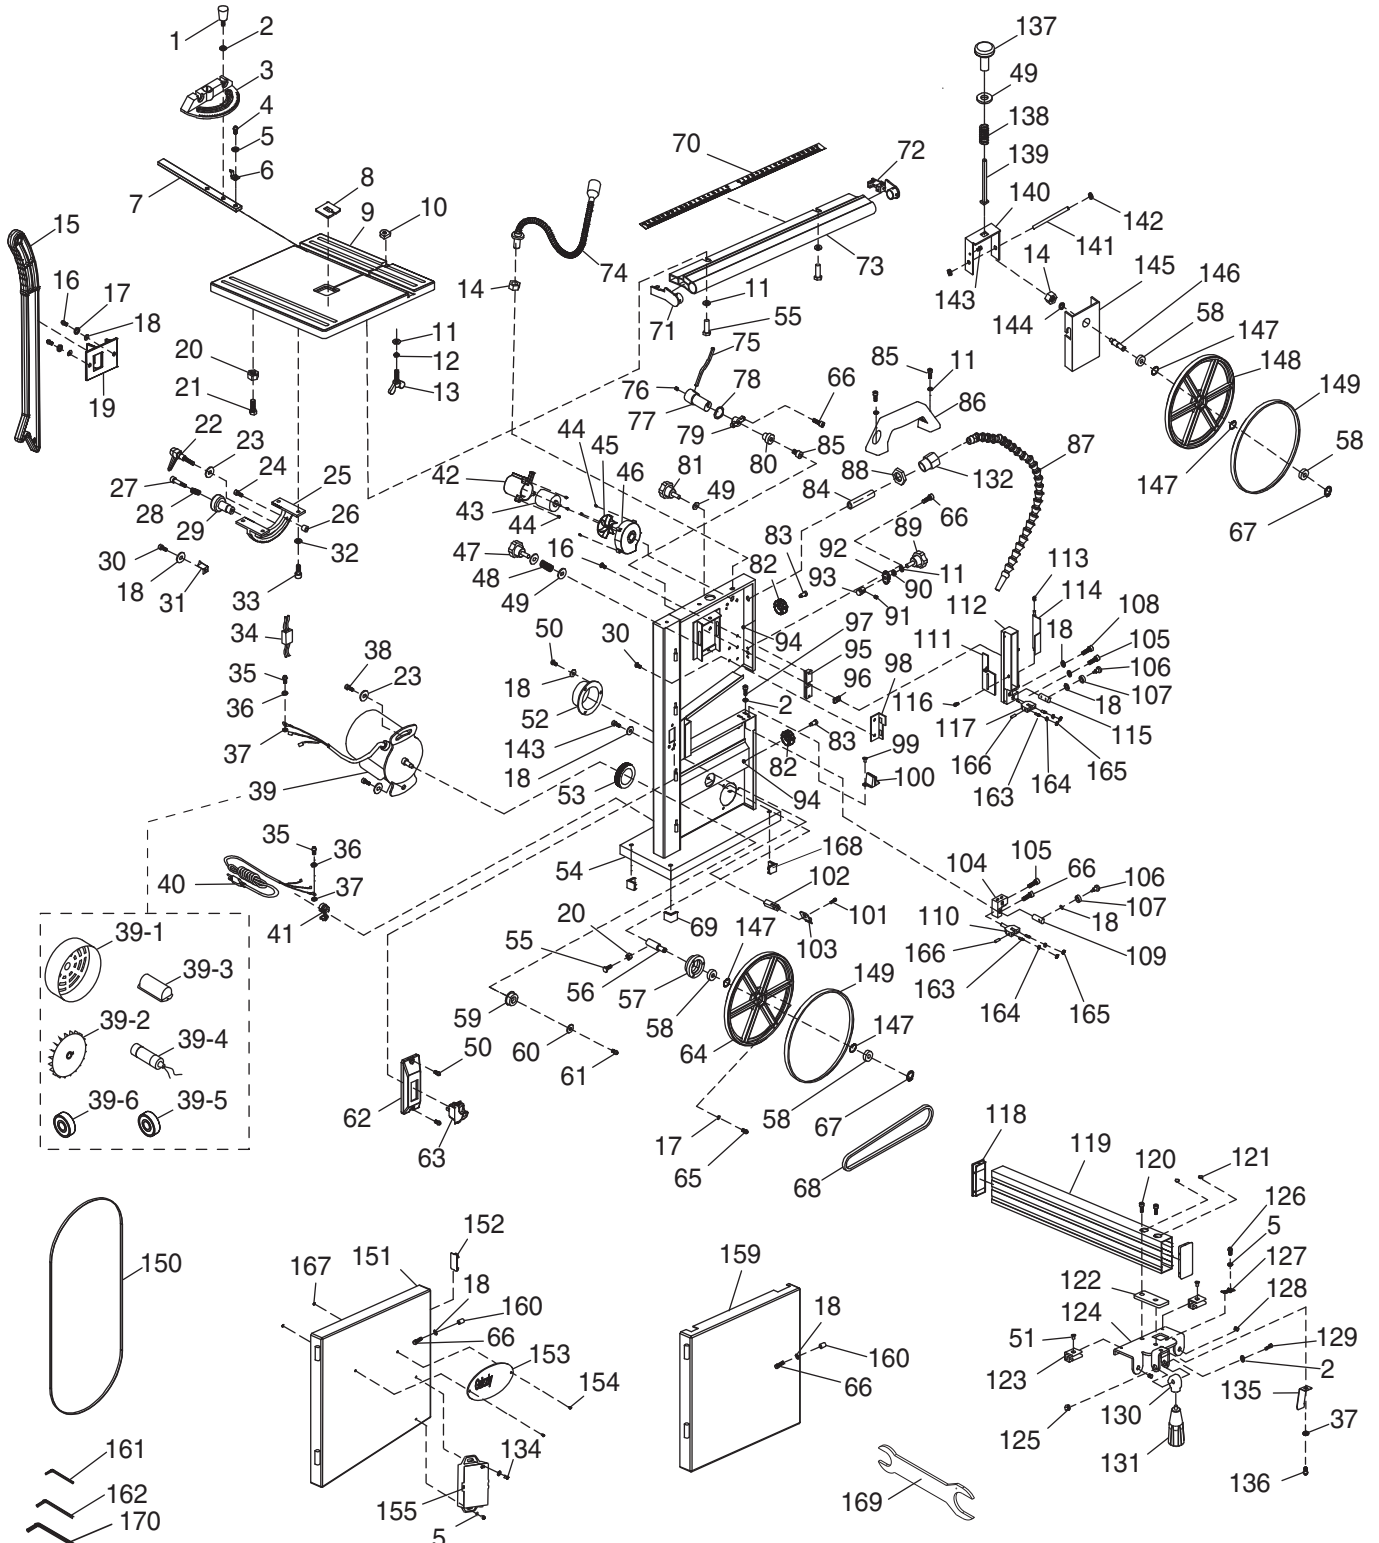

Main Parts List

REF	PART #	DESCRIPTION
1	P0803Z001	KNOB BOLT M6-1 X 20, D21, TAPERED KN
2	P0803Z002	FLAT WASHER 6MM
3	P0803Z003	MITER GAUGE BODY W/SCALE
4	P0803Z004	PHLP HD SCR M4-.7 X 6
5	P0803Z005	FLAT WASHER 4MM
6	P0803Z006	MITER GAUGE SCALE POINTER
7	P0803Z007	MITER BAR
8	P0803Z008	TABLE INSERT
9	P0803Z009	TABLE
10	P0803Z010	"D" NUT M6-1
11	P0803Z011	FLAT WASHER 6MM
12	P0803Z012	LOCK WASHER 6MM
13	P0803Z013	WING BOLT M6-1 X 16
14	P0803Z014	HEX NUT M10-1.5
15	P0803Z015	PUSH STICK
16	P0803Z016	PHLP HD SCR M5-.8 X 12
17	P0803Z017	LOCK WASHER 5MM
18	P0803Z018	FLAT WASHER 5MM
19	P0803Z019	PUSH STICK HOLDER
20	P0803Z020	HEX NUT M6-1
21	P0803Z021	CAP SCREW M6-1 X 24
22	P0803Z022	ADJUSTABLE HANDLE 60L, M8-1.25 X 25
23	P0803Z023	FENDER WASHER 8MM
24	P0803Z024	CAP SCREW M6-1 X 14
25	P0803Z025	TRUNNION W/SCALE
26	P0803Z026	STANDOFF-ROUND FF M6-1 X 14
27	P0803Z027	SHOULDER SCREW M5-.8 X 10, 8 X 35
28	P0803Z028	COMPRESSION SPRING 0.8 X 10 X 25
29	P0803Z029	GEARED KNOB 8 X 39, D46, 12T
30	P0803Z030	PHLP HD SCR M5-.8 X 8
31	P0803Z031	TABLE TILT SCALE POINTER
32	P0803Z032	FLAT WASHER 8MM
33	P0803Z033	CAP SCREW M8-1.25 X 14
34	P0803Z034	LED TRANSFORMER
35	P0803Z035	PHLP HD SCR M5-.8 X 8
36	P0803Z036	LOCK WASHER 5MM
37	P0803Z037	EXT TOOTH WASHER 5MM
38	P0803Z038	CAP SCREW M8-1.25 X 20
39	P0803Z039	MOTOR 1/3HP 120V 1-PH
39-1	P0803Z039-1	MOTOR FAN COVER
39-2	P0803Z039-2	MOTOR FAN
39-3	P0803Z039-3	CAPACITOR COVER
39-4	P0803Z039-4	R CAPACITOR 20M 250-350V 1-3/8 X 2-3/8
39-5	P0803Z039-5	BALL BEARING 6201ZZ (REAR)
39-6	P0803Z039-6	BALL BEARING 6202ZZ (FRONT)
40	P0803Z040	POWER CORD 18G 3W 72" 5-15P
41	P0803Z041	STRAIN RELIEF TYPE-1 1/2
42	P0803Z042	CHIP BLOWER MOTOR COVER
43	P0803Z043	CHIP BLOWER MOTOR 3.5W 12V
44	P0803Z044	TAP SCREW M3 X 6
45	P0803Z045	CHIP BLOWER FAN
46	P0803Z046	CHIP BLOWER FAN COVER
47	P0803Z047	KNOB BOLT M8-1.25 X 14, D32, 6-LOBE
48	P0803Z048	COMPRESSION SPRING 1 X 13 X 18
49	P0803Z049	FLAT WASHER 8MM

REF	PART #	DESCRIPTION
50	P0803Z050	PHLP HD SCR M5-.8 X 10
51	P0803Z051	FLAT HD SCR M3-.5 X 4
52	P0803Z052	DUST PORT 2"
53	P0803Z053	FOAM GASKET 8 X 5 X 120
54	P0803Z054	FRAME
55	P0803Z055	HEX BOLT M6-1 X 16
56	P0803Z056	WHEEL SHAFT (LOWER)
57	P0803Z057	TIMING BELT PULLEY (WHEEL)
58	P0803Z058	BALL BEARING 6000-2RS
59	P0803Z059	TIMING BELT PULLEY (MOTOR)
60	P0803Z060	FENDER WASHER 5MM
61	P0803Z061	CAP SCREW M5-.8 X 10
62	P0803Z062	SWITCH MOUNTING PLATE
63	P0803Z063	GRIZZLY PADDLE SWITCH
64	P0803Z064	WHEEL (LOWER)
65	P0803Z065	PHLP HD SCR M5-.8 X 16
66	P0803Z066	CAP SCREW M5-.8 X 10
67	P0803Z067	EXT RETAINING RING 10MM
68	P0803Z068	TIMING BELT 130XL 10
69	P0803Z069	RUBBER FOOT-LEFT
70	P0803Z070	SCALE
71	P0803Z071	FENCE RAIL CAP (LEFT)
72	P0803Z072	FENCE RAIL CAP (RIGHT)
73	P0803Z073	FENCE RAIL
74	P0803Z074	WORKLAMP W/SWITCH, LED BULB 12V, 1W
75	P0803Z075	QUICK-RELEASE LEVER 8 X 95
76	P0803Z076	SET SCREW M5-.8 X 6
77	P0803Z077	QUICK-RELEASE ECCENTRIC SHAFT
78	P0803Z078	WAVY WASHER 16 X 21 X 0.3MM
79	P0803Z079	QUICK-RELEASE MOUNT BRACKET
80	P0803Z080	QUICK-RELEASE ECCENTRIC BUSHING
81	P0803Z081	KNOB BOLT M8-1.25 X 35, D32, 6-LOBE
82	P0803Z082	DOOR LOCK CAM KNOB 40D
83	P0803Z083	SHOULDER SCREW M5-.8 X 6, 8 X 12
84	P0803Z084	RUBBER TUBE 8 X 40
85	P0803Z085	CAP SCREW M6-1 X 20
86	P0803Z086	CARRYING HANDLE
87	P0803Z087	LOC-LINE 1/2 NPT, 15"
88	P0803Z088	HEX NUT M12-1.25 THIN BRASS
89	P0803Z089	KNOB W/SHAFT 6 X 22, D32, 6-LOBE
90	P0803Z090	WAVY WASHER 6MM
91	P0803Z091	SET SCREW M4-.7 X 4
92	P0803Z092	ADJUSTMENT KNOB SEAT
93	P0803Z093	GEAR 10T
94	P0803Z094	LOCK NUT M5-.8
95	P0803Z095	UPPER BLADE GUIDE BLOCK
96	P0803Z096	SQUARE NUT M8-1.25
97	P0803Z097	CAP SCREW M6-1 X 8
98	P0803Z098	BLADE GUIDE LIMIT PLATE
99	P0803Z099	FLAT HD SCR M4-.7 X 8
100	P0803Z100	BLADE COVER (LOWER)
101	P0803Z101	CAP SCREW M5-.8 X 6
102	P0803Z102	WHEEL BRUSH SEAT
103	P0803Z103	WHEEL BRUSH
104	P0803Z104	BLADE GUIDE BLOCK (LOWER)




Main Parts List (Cont.)

REF	PART #	DESCRIPTION
105	P0803Z105	CAP SCREW M5-.8 X 12
106	P0803Z106	SHOULDER SCREW M5-.8 X 10, 6 X 6
107	P0803Z107	BALL BEARING 606-2RS
108	P0803Z108	CAP SCREW M5-.8 X 16
109	P0803Z109	BLADE GUIDE ROD (LOWER)
110	P0803Z110	BLADE GUIDE (LOWER)
111	P0803Z111	BLADE GUIDE SLIDING COVER (UPPER)
112	P0803Z112	BLADE GUIDE COVER (UPPER)
113	P0803Z113	DOWEL PIN 3 X 15 W/COMP SPRING
114	P0803Z114	BLADE GUIDE DOOR (UPPER)
115	P0803Z115	BLADE GUIDE ROD (UPPER)
116	P0803Z116	PHLP HD SCR M4-.7 X 10
117	P0803Z117	BLADE GUIDE (UPPER)
118	P0803Z118	FENCE END CAP
119	P0803Z119	FENCE V1
120	P0803Z120	CAP SCREW M6-1 X 8
121	P0803Z121	FENCE HOLE PLUG
122	P0803Z122	FENCE SPACER PLATE
123	P0803Z123	FENCE BASE CLIP V1
124	P0803Z124	FENCE BASE V1
125	P0803Z125	LOCK NUT M6-1
126	P0803Z126	PHLP HD SCR M4-.7 X 6
127	P0803Z127	FENCE POINTER
128	P0803Z128	SET SCREW M6-1 X 8 SLOTTED
129	P0803Z129	CAP SCREW M6-1 X 30
130	P0803Z130	FENCE HANDLE LOCKING CAM
131	P0803Z131	FIXED HANDLE 32 X 76, M6-1 X 12
135	P0803Z135	SPRING PLATE
136	P0803Z136	PHLP HD SCR M5-.8 X 6
137	P0803Z137	KNOB M8-1.25, D50, 5-LOBE
138	P0803Z138	COMPRESSION SPRING 2.5 X 14 X 64

REF	PART #	DESCRIPTION
139	P0803Z139	CARRIAGE BOLT M8-1.25 X 80
140	P0803Z140	WHEEL ADJUSTMENT BRACKET
141	P0803Z141	QUICK-RELEASE PIVOT SHAFT 8 X 90
142	P0803Z142	EXT RETAINING RING 8MM PUSH-ON
143	P0803Z143	CAP SCREW M5-.8 X 8
144	P0803Z144	LOCK WASHER 10MM
145	P0803Z145	WHEEL MOUNT PLATE
146	P0803Z146	WHEEL SHAFT (UPPER)
147	P0803Z147	INT RETAINING RING 26MM
148	P0803Z148	WHEEL (UPPER)
149	P0803Z149	BANDSAW TIRE 9-5/16"
150	P0803Z150	BLADE 62" X 1/4" X 0.014" 6-TPI HOOK
151	P0803Z151	WHEEL COVER (UPPER)
152	P0803Z152	BLADE VIEW WINDOW, PLASTIC
153	P0803Z153	GRIZZLY NAMEPLATE-MINI
154	P0803Z154	PHLP HD SCR M3-.5 X 6
155	P0803Z155	LASER SIGHT UNIT
156	P0803Z156	LASER SIGHT SWITCH
157	P0803Z157	LASER SIGHT
158	P0803Z158	LASER SIGHT BOX COVER
159	P0803Z159	WHEEL COVER (LOWER)
160	P0803Z160	STANDOFF-SE-ROUND F M5-.8, 17
161	P0803Z161	HEX WRENCH 2.5MM
162	P0803Z162	HEX WRENCH 4MM
163	P0803Z163	BEARING SHAFT
164	P0803Z164	BALL BEARING 696-2RS
165	P0803Z165	EXT RETAINING RING 5MM
166	P0803Z166	SET SCREW M5-.8 X 5
167	P0803Z167	HEX NUT M3-.5



Labels & Cosmetics

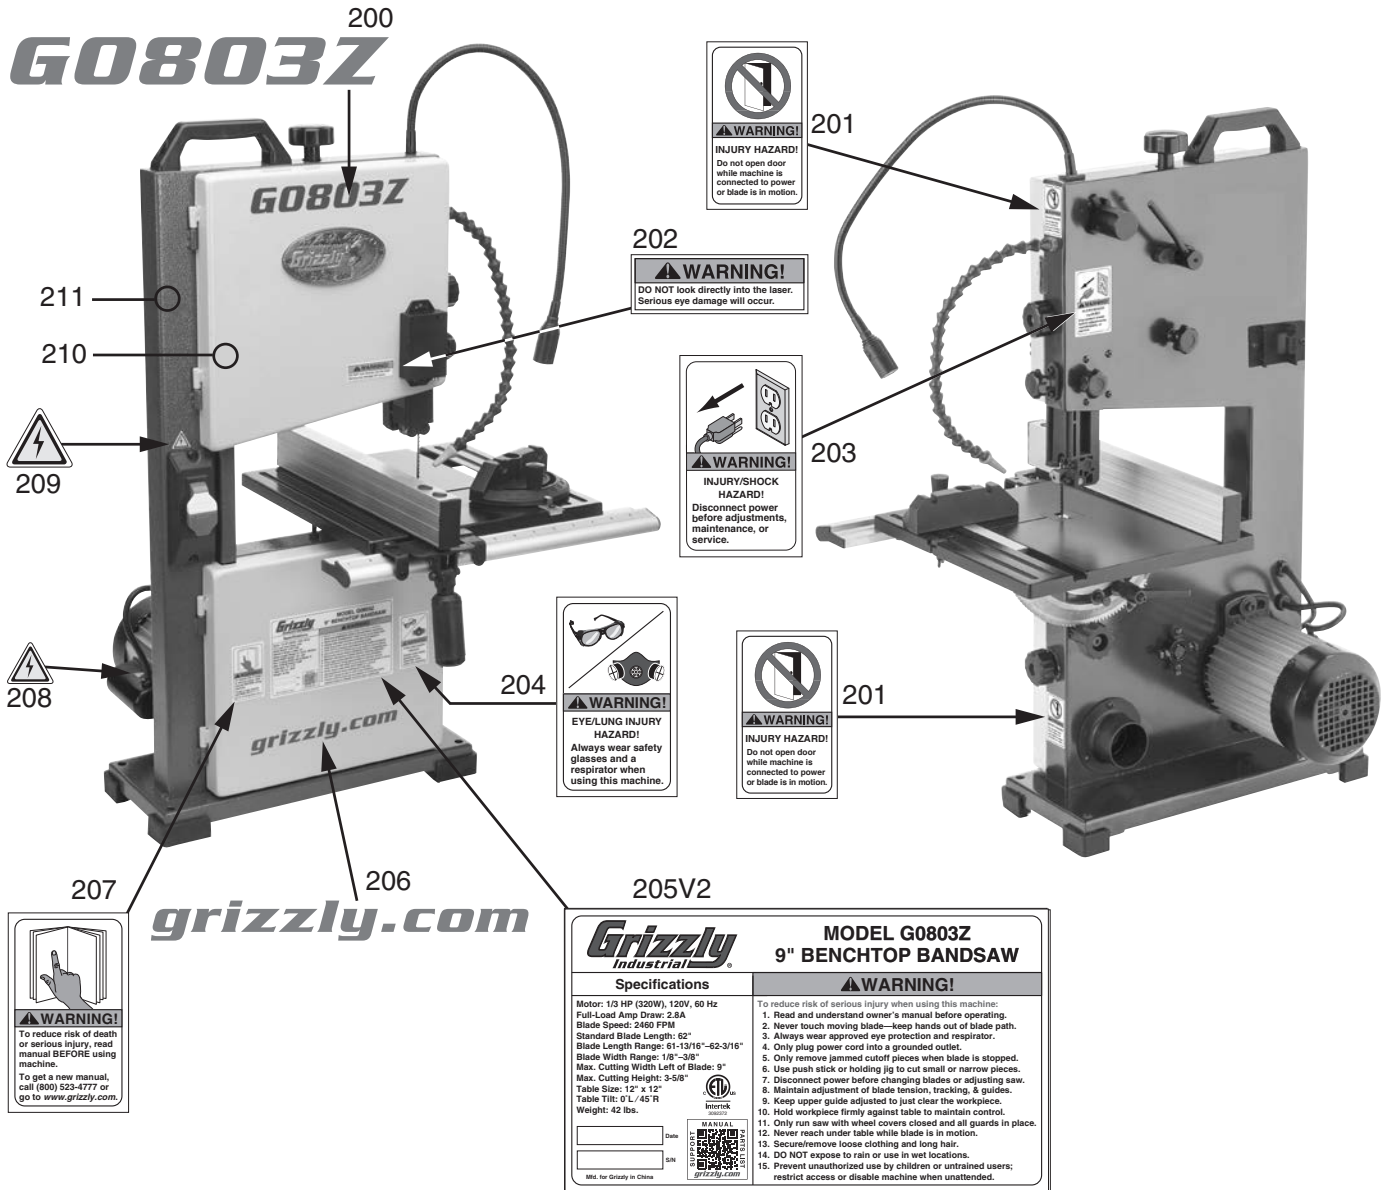

REF	PART #	DESCRIPTION
200	P0803Z200	MODEL NUMBER LABEL
201	P0803Z201	DO NOT OPEN DOOR LABEL
202	P0803Z202	DO NOT LOOK INTO LASER LABEL
203	P0803Z203	DISCONNECT 110V POWER LABEL
204	P0803Z204	RESPIRATORY/GLASSES LABEL
205V2	P0803Z205V2	MACHINE ID LABEL V2.07.19

REF	PART #	DESCRIPTION
206	P0803Z206	GRIZZLY.COM LABEL
207	P0803Z207	READ MANUAL LABEL
208	P0803Z208	ELECTRICITY LABEL-SMALL
209	P0803Z209	ELECTRICITY LABEL-MEDIUM
210	P0803Z210	TOUCH-UP PAINT GREY PUTTY
211	P0803Z211	TOUCH-UP PAINT GRIZZLY GREEN

! WARNING

Safety labels help reduce the risk of serious injury caused by machine hazards. If any label comes off or becomes unreadable, the owner of this machine **MUST** replace it in the original location before resuming operations. For replacements, contact (800) 523-4777 or www.grizzly.com.





WARRANTY CARD

Name _____
 Street _____
 City _____ State _____ Zip _____
 Phone # _____ Email _____
 Model # _____ Order # _____ Serial # _____

The following information is given on a voluntary basis. It will be used for marketing purposes to help us develop better products and services. **Of course, all information is strictly confidential.**

1. How did you learn about us?

Advertisement Friend Catalog
 Card Deck Website Other:

2. Which of the following magazines do you subscribe to?

<input type="checkbox"/> Cabinetmaker & FDM	<input type="checkbox"/> Popular Science	<input type="checkbox"/> Wooden Boat
<input type="checkbox"/> Family Handyman	<input type="checkbox"/> Popular Woodworking	<input type="checkbox"/> Woodshop News
<input type="checkbox"/> Hand Loader	<input type="checkbox"/> Precision Shooter	<input type="checkbox"/> Woodsmith
<input type="checkbox"/> Handy	<input type="checkbox"/> Projects in Metal	<input type="checkbox"/> Woodwork
<input type="checkbox"/> Home Shop Machinist	<input type="checkbox"/> RC Modeler	<input type="checkbox"/> Woodworker West
<input type="checkbox"/> Journal of Light Cont.	<input type="checkbox"/> Rifle	<input type="checkbox"/> Woodworker's Journal
<input type="checkbox"/> Live Steam	<input type="checkbox"/> Shop Notes	<input type="checkbox"/> Other:
<input type="checkbox"/> Model Airplane News	<input type="checkbox"/> Shotgun News	
<input type="checkbox"/> Old House Journal	<input type="checkbox"/> Today's Homeowner	
<input type="checkbox"/> Popular Mechanics	<input type="checkbox"/> Wood	

3. What is your annual household income?

\$20,000-\$29,000 \$30,000-\$39,000 \$40,000-\$49,000
 \$50,000-\$59,000 \$60,000-\$69,000 \$70,000+

4. What is your age group?

20-29 30-39 40-49
 50-59 60-69 70+

5. How long have you been a woodworker/metalworker?

0-2 Years 2-8 Years 8-20 Years 20+ Years

6. How many of your machines or tools are Grizzly?

0-2 3-5 6-9 10+

7. Do you think your machine represents a good value? Yes No

8. Would you recommend Grizzly Industrial to a friend? Yes No

9. Would you allow us to use your name as a reference for Grizzly customers in your area?
Note: We never use names more than 3 times. Yes No

10. Comments: _____

CUT ALONG DOTTED LINE

FOLD ALONG DOTTED LINE



Place
Stamp
Here



GRIZZLY INDUSTRIAL, INC.
P.O. BOX 2069
BELLINGHAM, WA 98227-2069



FOLD ALONG DOTTED LINE

Send a Grizzly Catalog to a friend:

Name _____
Street _____
City _____ State _____ Zip _____

TAPE ALONG EDGES--PLEASE DO NOT STAPLE

WARRANTY & RETURNS

Grizzly Industrial, Inc. warrants every product it sells for a period of **1 year** to the original purchaser from the date of purchase. This warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence, accidents, repairs or alterations or lack of maintenance. This is Grizzly's sole written warranty and any and all warranties that may be implied by law, including any merchantability or fitness, for any particular purpose, are hereby limited to the duration of this written warranty. We do not warrant or represent that the merchandise complies with the provisions of any law or acts unless the manufacturer so warrants. In no event shall Grizzly's liability under this warranty exceed the purchase price paid for the product and any legal actions brought against Grizzly shall be tried in the State of Washington, County of Whatcom.

We shall in no event be liable for death, injuries to persons or property or for incidental, contingent, special, or consequential damages arising from the use of our products.

To take advantage of this warranty, contact us by mail or phone and give us all the details. We will then issue you a "Return Number," which must be clearly posted on the outside as well as the inside of the carton. We will not accept any item back without this number. Proof of purchase must accompany the merchandise.

The manufacturers reserve the right to change specifications at any time because they constantly strive to achieve better quality equipment. We make every effort to ensure that our products meet high quality and durability standards and we hope you never need to use this warranty.

Please feel free to write or call us if you have any questions about the machine or the manual.

Thank you again for your business and continued support. We hope to serve you again soon.

grizzly.com[®]
TOOL WEBSITE

Buy Direct and Save with Grizzly[®] – Trusted, Proven and a Great Value!
~Since 1983~

*Visit Our Website Today For
Current Specials!*

**ORDER
24 HOURS A DAY!
1-800-523-4777**

