




3" Flush Valve Seal

Replacement flush valve seal
for 3" toilet tank.

This Package Contains:

(1) Flush valve seal


Installation Instructions:

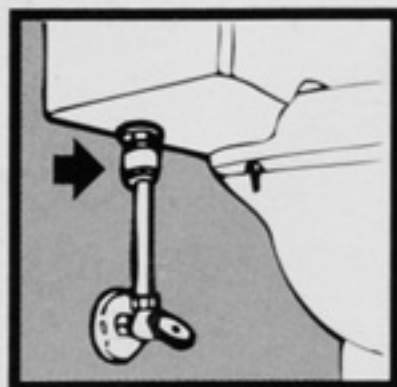

1. Turn off water supply and flush toilet to empty tank. Disconnect water supply line.



2. Remove toilet tank from bowl by unscrewing nuts located on underside of bowl.

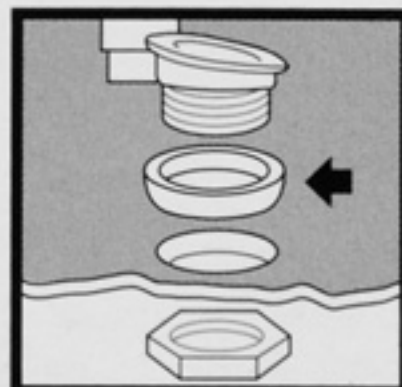

3. Remove flush valve by unfastening nut. Remove worn seal and replace with new seal. Reassemble following the instructions in reverse order.

Caution:
Overtightening
nuts may crack
ceramic toilet.



Waxman
Consumer Products

Cleveland, Ohio 44146

Made in China

www.waxmancpg.com

© 2014 Waxman Consumer Products Group



0 28905 75201 5