

OCULUS SWITCHBACK

1) WATCH THE DIY INSTALLATION VIDEO GUIDE:




WATCH THE VIDEO: *vimeo*

www.vimeo.com/537409425



2) WIRING INFO:

The ORACLE Lighting Oculus™ Bi-LED 9" Switch-Back headlights come with a pair of Plug & Play harness adapters which plug into the factory harness connector located in the fender behind the factory fender liner. The driver side connector can also be accessed from under the hood if you prefer not to remove the driver side fender liner for access. Simply plug in the harness and the AMBER Halo lights will work with the factory turn signal and the WHITE Halo lights will work with the Parking Lights. To activate the parking lights you can manually turn the headlight switch to the parking light position during the day or AUTO at night they will also come on with the headlights.

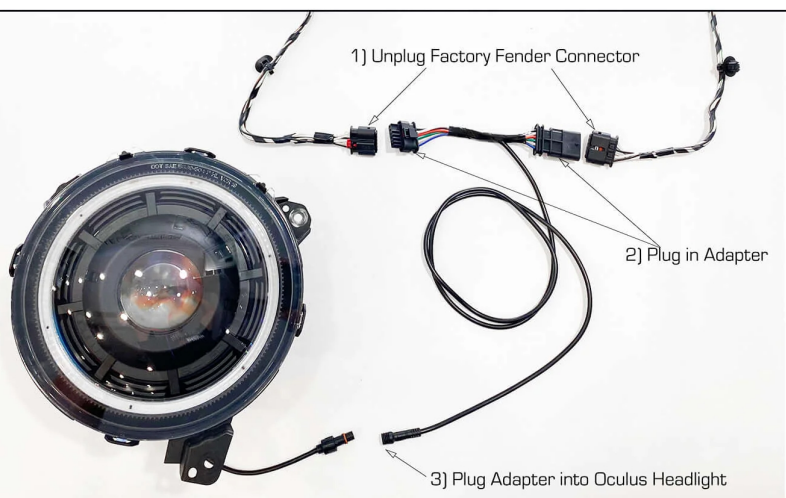

3) USE THE ORACLE FAQ RESOURCE PAGE:

NOTE: If you do not reconnect the factory turn signal ORACLE Part # 5013-504 will be needed to prevent hyperflash.

Visit www.oraclelights.com/oculus for information and videos on common questions and tips & tricks for using your lights. All Oculus Bi-LED Headlights come from the factory with a baseline headlight level but depending on your lift, tires, etc you may need to adjust the beam level to insure maximum light on road for best visibility while creating minimal glare. To adjust remove the adjusting screw can and use the included tool to level the beam. Visit our FAQ page for more details.

