



Icon Collection Vessel Sink Faucet Model NO.: UF30300 UF30303


Preparation / Assembly



Shut off water supplies. Remove the old faucet. Clean the sink surface in preparation for your new faucet.



Secure the faucet to the sink by installing the plastic washer, steel washer, and nut onto the shank. Tighten with a wrench.



Important: After installation is completed, turn on the water supply and allow both hot and cold water to run for at least one minute each. While water is running, check for leaks.

Reinstall aerator, and your new faucet is now ready to use.

INSTRUCTION

Tools:


- · Adjustable Wrench
- ·Pliers
- ·Pipe Wrench
- ·Screwdriver
- ·Teflon Tape




Maintenance:

Your new Vessel Sink faucet is designed for years of trouble-free performance.


Keep it looking new by cleaning it periodically with a soft cloth. Avoid abrasive cleaners, steel wool and harsh chemicals as these will dull the finish and void your warranty.



Place the flange on the bottom of the faucet before positioning the faucet through the mounting hole.



Apply pipe tape onto the threads of the water supplies. Use a wrench when tightening the hose connection. Do not over-tighten.

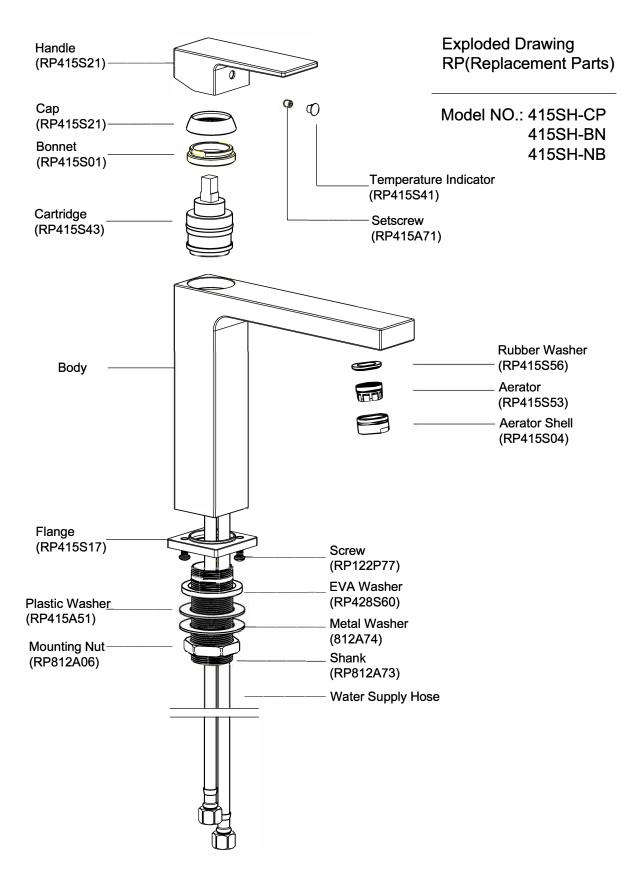

Limited Lifetime Warranty

Ultra Faucets warrants to the original purchaser that its products will be free from defects in workmanship and materials. All Ultra Faucets are provided with a life time limited warranty. This warranty does not cover any other labor or service charges associated with the removal, repair, or reinstallation of Ultra Faucets products. This express warranty does not apply to products that have been damaged as a result of misuse, abuse, negligence, accident, faulty installation or maintenance practices and/or used in any manner contrary to those recommended by the manufacturer.