



READ AND FOLLOW ALL INSTRUCTIONS AND WARNINGS IN THIS MANUAL BEFORE USE TO AVOID RISK OF SERIOUS INJURY OR DEATH.



TRUCK TROLLEY



TRUCK TROLLEY

INSTALLATION INSTRUCTIONS



CALL - 989-262-9595 · EMAIL - info@trucktrolley.com

TruckTrolley.com

IMPORTANT SAFETY INFORMATION

⚠️ WARNING

READ AND FOLLOW ALL INSTRUCTIONS AND WARNINGS BEFORE INSTALLATION OR USE TO AVOID PERSONAL INJURY OR DEATH.

- Never stand, sit, or ride on Trolley.
- Never exceed 300 lbs maximum load limit in Trolley.
- Always use safety straps. Safety straps must be secured to Trolley prior to transport and to ensure Trolley does not roll out when tailgate is opened.
- Always ensure load in Trolley is uniformly distributed. When Trolley is extended past tailgate, load overhanging tailgate must not exceed 100 lbs.
- Trolley may roll unexpectedly if truck is not level. Load and unload Trolley only when truck is stationary and level.
- Never stand behind loaded Trolley until you are sure the Trolley will not move on its own.
- Always ensure tailgate is closed and Safety Straps secured before operating truck.
- When properly installed, Trolley should not overhang tailgate more than 18" when fully extended.
- Never install cord rail straps on tie-down anchors that are higher than the upright brackets on the Trolley.
- Never install or use Trolley on trucks without tie-down anchors.
- Before each use, tighten cord rail straps, cord rail clasps, and Trolley D-Loops, and inspect for wear or damage. Replace any damaged parts.
- Never use Trolley as a ramp or outside truck bed.
- Never use Trolley without tailgate.
- Always ensure payload is secure in Trolley.

RÖV LIFE, LLC 1-YEAR LIMITED WARRANTY

WHAT THIS WARRANTY COVERS

RÖV Life, LLC ("Manufacturer") warrants to the original purchaser that Truck Trolley® products will be free from defects in material and workmanship from the date of purchase and continuing for a period of one (1) year.

WHAT THIS WARRANTY DOES NOT COVER

This warranty does not cover and expressly excludes:

- Damage or defects caused by normal wear and tear, rust, scratches, cosmetic damage, accidents, unlawful vehicle operation, fire, earthquake or other external cause outside the control of Manufacturer, installation in a non-supported vehicle, failure to assemble, install or use the Truck Trolley® Product in accordance with Manufacturer's written instructions, warnings, or guidelines, modification or alteration of the Truck Trolley® Product, misuse, corrosion, exceeding Manufacturer's weight capacity for the product, fuel, chemical or other liquid contact or spills, vandalism, inadequate care or maintenance;
- Damage to any contents in, on, or around the Truck Trolley® Product or vehicle; and
- Any and all labor costs, including but not limited to any labor costs to uninstall, disassemble, reassemble, or reinstall the Truck Trolley® Product or its components, or replacement Products or components.

LIMITATION OF LIABILITY

To the extent permitted by law, this warranty and the remedies set forth herein are exclusive and in lieu of all other warranties, remedies and conditions, whether oral, written, statutory, express or implied. MANUFACTURER DISCLAIMS ALL STATUTORY AND IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND WARRANTIES AGAINST HIDDEN OR LATENT DEFECTS TO THE EXTENT PERMITTED BY LAW. To the extent such warranties cannot be disclaimed, such implied warranties shall apply only for the warranty period specified above. Please note that some states do not allow limitation on how long an implied warranty (or condition) lasts, so the above limitation may not apply to you.

Except as provided in this warranty and to the extent permitted by law, Manufacturer shall not be liable for any direct, special, incidental or consequential damages resulting from any breach of warranty or condition, or arising in connection with the sale, use or repair of Truck Trolley® Products or components, or under any other legal theory, including but not limited to nonperformance, loss of use, loss of revenue, loss of actual or anticipated profits, loss of the use of money, loss of business, loss of opportunity, loss of goodwill, and loss of reputation. Manufacturer's maximum liability shall not in any case exceed the purchase price paid by you for the Truck Trolley® Product. Please note that some states do not allow the exclusion or limitation of incidental or consequential damages, so the above

limitation or exclusion may not apply to you. This Warranty is the sole and exclusive warranty for Truck Trolley® Products. No employee, agent, dealer, or any other person is authorized to alter or amend the terms of this Warranty or make any other warranties on behalf of RÖV Life, LLC. This warranty is valid only to the original purchaser and is not transferrable.

HOW TO SUBMIT A WARRANTY CLAIM

If a defect in materials or workmanship causes your Truck Trolley® Product to become inoperable within the warranty period, to submit a warranty claim, visit the Truck Trolley Warranty website portal (www.trucktrolley.com/warranty) and provide the required information. As part of the process, you must provide:

1. Valid proof of original purchase that includes the date of the purchase. Unfortunately, without a valid form of proof of purchase the warranty is not valid.
2. Product manufacture date wheel.
3. A description of the problem with the Truck Trolley® Product and circumstances under which the problem occurred.
4. High resolution photos clearly showing the damaged part or components.
5. Full contact information, including name, mailing address, email address, and telephone number.

After review of this initial information submitted, you may be asked to provide additional information to support your claim and/or you may be required to send any claimed defective products or components to Manufacturer for analysis.

WHAT WE WILL DO

If you submit a valid warranty claim to Manufacturer during the warranty period and Manufacturer determines that the Truck Trolley® Product or its components have defects covered by this Warranty, Manufacturer will, at its option, (a) send you replacement parts for your Truck Trolley® Product, or (b) provide you a full replacement Truck Trolley® Product. Your replacement components or replacement Truck Trolley® Product will be covered under the warranty for the balance of the original warranty period, if any. All replacement parts ship direct from Manufacturer and shipping method used is at Manufacturer's sole discretion. Expedited shipping is available if requested but will be at the sole cost of original purchaser. Manufacturer, at its option, may require you to return any claimed defective parts or products to Manufacturer, and such returned items become property of Manufacturer. You are responsible for installation/reinstallation (labor charges) of the replacement parts and/or Truck Trolley® Product. Manufacturer may elect at its option to instead issue to the original purchaser a refund equal to the purchase price paid for the Truck Trolley® Product or a credit in such amount to be used toward the purchase of a new Truck Trolley® Product.

INSTALLATION INSTRUCTIONS

WARNING! TRUCK MUST HAVE TIE-DOWN ANCHORS TO INSTALL TROLLEY.

WARNING! BEFORE INSTALLATION, ENSURE TRUCK IS ON LEVEL SURFACE, ENGINE OFF, AND IN PARK WITH EMERGENCY BRAKE APPLIED.

STEP 1.




Feed long cord rail through driver-side tie down anchor nearest truck cab, and feed cut end of cord rail through loop end and pull tight. Repeat on the passenger side.

STEP 2.



Feed short cord rail through driver-side tie down nearest the tailgate, and feed clasp end of cord rail through loop end and pull tight. Repeat on the passenger side.

WARNING! DO NOT SECURE TO TIE-DOWN ANCHORS HIGHER THAN D-LOOPS ON TROLLEY BRACKET.

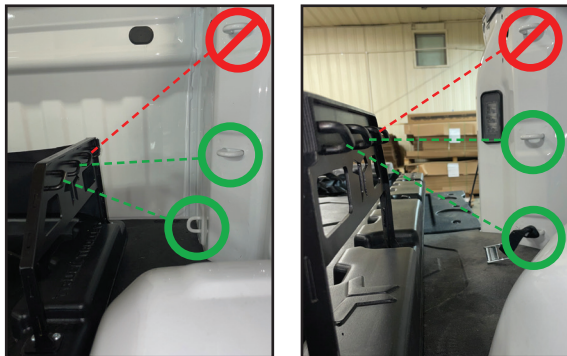

STEP 3.



If you are in the truck bed at this point - **Get Out.** Place Trolley into truck bed and unfold.

WARNING! NEVER STAND, SIT, OR RIDE ON TROLLEY.

STEP 4.



Unfold both back brackets into upright and locked position (Push down to lock when upright).

WARNING! KEEP HANDS AND FINGERS CLEAR OF PINCH POINTS WHEN FOLDING/UNFOLDING.

STEP 5.



Feed driver-side long cord rail through D-loop on back bracket of Trolley. Repeat on passenger side.	BED SIZE	RECOMMEND LOOP
	• SHORT	2ND FROM REAR
	• MID	CLOSEST TO CAB
	• LONG	CLOSEST TO CAB

STEP 6.



Feed driver-side long cord rail through clasp on short cord rail and pull to remove slack. Repeat on passenger side.

STEP 7.



Center Trolley between wheel wells and push Trolley into truck bed until end of the Trolley overhangs the truck bed by ¼ inch to ½ inch. You want the Trolley to be flush to the truck bed up to a ½ inch overhang.

STEP 8.



Pull both driver-side and passenger-side long cord rails further through the clasp on the short cord rail until tight and Trolley does not go in past the edge of the truck bed.

WARNING! BEFORE EACH USE, TIGHTEN CORD RAIL STRAPS, CORD RAIL CLASPS, AND TROLLEY D-LOOPS AND INSPECT FOR WEAR OR DAMAGE. REPLACE ANY DAMAGED PARTS.

STEP 9.



Close tailgate to ensure that slight pressure is applied to the Trolley to prevent rolling in the truck bed when vehicle is in motion.

WARNING! NEVER USE TROLLEY WITHOUT A TAILGATE, OR OUTSIDE TRUCK.

STEP 10.



Open tailgate and ensure the Trolley rolls out easily to the desired end point past your tailgate. Apply pressure on the end of the Trolley when fully extended to ensure the Trolley does not tip.

STEP 11.



Extend Trolley as far as it will go past the tailgate after installation. Measure distance from end of tailgate to end of Trolley. Trolley should not extend past the tailgate more than 18". If it does, move the cord rails to a different D-loop on the Trolley back bracket.

STEP 12.



Install safety strap to tiedown near the tailgate on the passenger side and clip to Trolley. Repeat on driver side.

WARNING! ALWAYS USE SAFETY STRAPS. SAFETY STRAPS MUST BE SECURED TO TROLLEY PRIOR TO TRANSPORT AND TO ENSURE TROLLEY DOES NOT ROLL OUT WHEN TAILGATE IS OPENED.

FOR WARRANTY INFORMATION PLEASE VISIT THE WEBSITE
www.trucktrolley.com/warranty

TRUCK TROLLEY REMOVAL INSTRUCTIONS

For quick removal, cord rails can stay installed in the bed of the truck

STEP 1.

Disconnect long cord rails from clasp and Trolley back bracket (both driver side and passenger side)



STEP 2.

Feed long cord rails back through clasp on short cord rails and pull tight so cord rails rest on side of truck bed



STEP 3.

Fold down both back brackets and fold up Trolley

WARNING! KEEP HANDS AND FINGERS CLEAR OF PINCH POINTS WHEN FOLDING/UNFOLDING.



STEP 4.

Remove safety straps from truck bed and connect to tie down loops on the Trolley. This will keep Trolley in folded position and act as a handle to remove/carry Trolley when not in use.




TRUCK TROLLEY



READ AND FOLLOW ALL INSTRUCTIONS AND WARNINGS IN THIS MANUAL BEFORE USE TO AVOID RISK OF SERIOUS INJURY OR DEATH.



PARTS INCLUDED

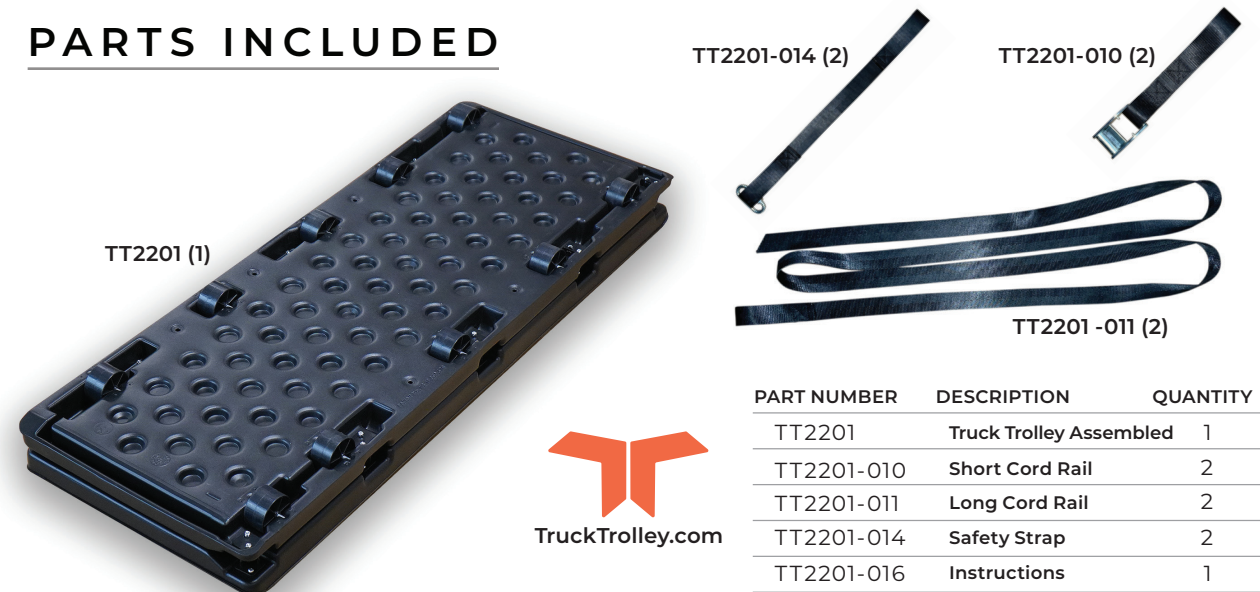

PART NUMBER	DESCRIPTION	QUANTITY
TT2201	Truck Trolley Assembled	1
TT2201-010	Short Cord Rail	2
TT2201-011	Long Cord Rail	2
TT2201-014	Safety Strap	2
TT2201-016	Instructions	1

