





Installation Instructions

SK14 & SK16 Body-Up Indicator Kits

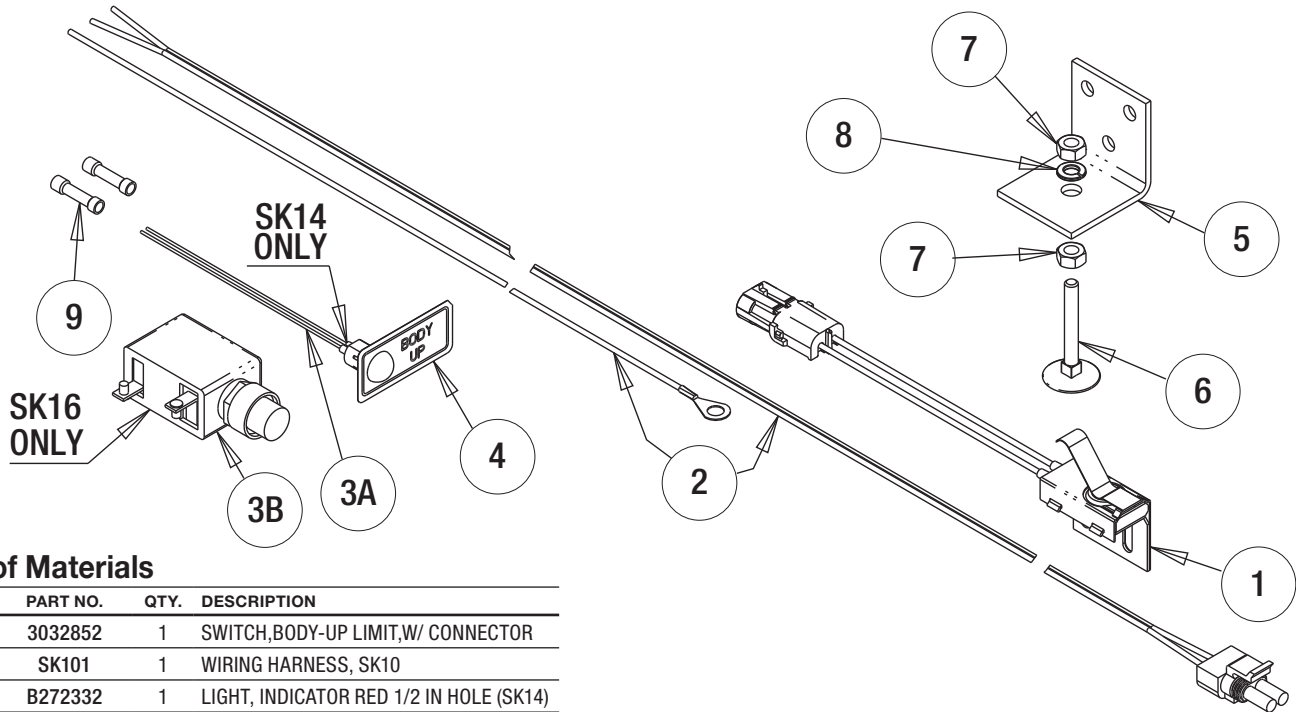

Bill of Materials

ITEM	PART NO.	QTY.	DESCRIPTION
1	3032852	1	SWITCH, BODY-UP LIMIT, W/ CONNECTOR
2	SK101	1	WIRING HARNESS, SK10
3A	B272332	1	LIGHT, INDICATOR RED 1/2 IN HOLE (SK14)
3B	BL10	1	BUZZER LIGHT, 12 VOLT (SK16)
4	SK102	1	DECAL, BODY UP
5	3000088	1	BRACKET, BODY-UP SWITCH STOP
6	B22806	1	BOLT, ELEVATOR, 5/16-18 X 2"
7	FNH031018025	2	NUT, HEX, 5/16-18, ZINC
8	FWL031058008	1	WASHER, LOCK, 5/16" ZINC
9	E421005	2	CONNECTOR, BUTT VINYL INSULATION

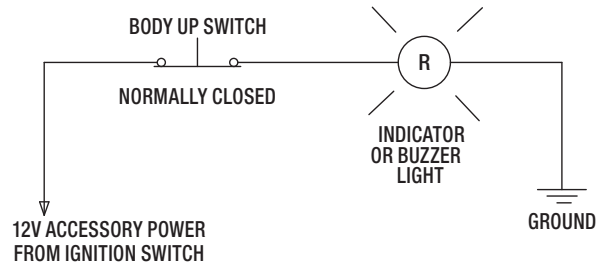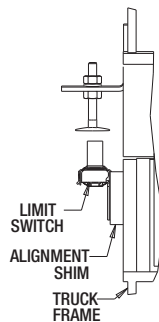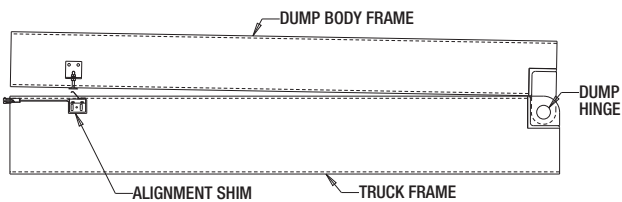

1. Select an area along truck frame, no more than two feet from the front, where both the truck frame and the dump body frame have adjacent areas free of obstructions.
2. Mount stop bracket (Item 5) to dump body frame approximately 1" from bottom of frame.
3. Install the elevator bolt using a nut on each side of bracket and one lock washer. Adjust bolt so that when body is down, the elevator bolt will depress the switch spring about 1/2".

4. Mount the limit switch to truck frame positioning it to where the spring will be contacted by the elevator bolt. It may be required to shim the switch off the frame so the switch spring contacts the center of the elevator bolt.
5. Select an area on dash or console to mount warning light and decal. The location must be visible to driver while seated in the driver's seat. The light requires a 1/2" dia. hole. Before drilling, make sure there is nothing behind the area where the hole will be drilled. Install light and decal in hole.

- 6.** Inspect the cab to see if there is an existing grommet lined access hole that can be used to run wires into cab. If none is available, drill a hole to run wires into cab. If you drill a new hole, install a rubber grommet in the hole to prevent damage to the wires.
- 7.** Connect brown and black wire to light using butt connectors provided. Connect opposite end of the black wire to known ground. Connect red wire to an accessory power source (only powered with ignition in run position.) Connect wire harness plug to body-up switch plug.
- 8.** Adjust body-up switch as needed with the elevator bolt and switch slots provided.

Installer: Please forward this instruction sheet to vehicle owner/operator.

General Information:

These instructions are for your safety and the safety of the end user. Read them carefully until you understand them.

General Safety Information:

To prevent injury to yourself and/or damage to the equipment:

- 1.** Read carefully all owners' manuals, service manuals, and/or other instructions.
- 2.** Always follow proper procedures, and use proper tools and safety equipment.
- 3.** Be sure to receive proper training.
- 4.** Never work alone while under a vehicle or while repairing or maintaining equipment.
- 5.** Always use proper components in applications for which they are approved.
- 6.** Be sure to assemble components properly.
- 7.** Never use worn-out or damaged components.
- 8.** Always block any raised or moving device that may injure a person working on or under a vehicle.
- 9.** Owner/Operator should periodically inspect the mounting bracket, and hardware as a routine maintenance

WARRANTY

Buyers Products Co. warrants all truck/trailer hardware manufactured or distributed by it, to be free from defects in material and workmanship for a period of one year from date of shipment. Parts must be properly installed and used under normal conditions. Any product which has been altered, including modification, misuse, accident or lack of maintenance will not be considered under warranty. Normal wear is excluded. The sole responsibility of Buyers Products Co. under this warranty is limited to repairing or replacing any part or parts which are returned, prepaid, and are found to be defective by Buyers Products Co. Authorization from Buyers Products Co. must be obtained before returning any part. No charges for transportation or labor performed on Buyers' products will be allowed under this warranty.