




Tether Installation

Untie the knot and remove the ball from the bungee cord.

1

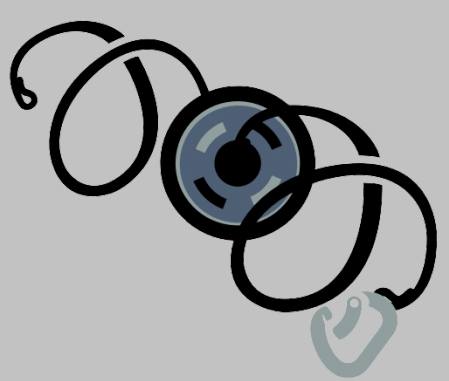

2

Pass the bungee cord through the installed grommet.

Replace the ball stop onto the bungee cord and retie the knot.

3



4

Call or email us with any questions you might have!

CUSTOMERSERVICE@RUBBERDOCKIE.COM

(605) 422-1325