



ULTRACOOOL ANTIFREEZE + COOLANT

UNIVERSAL | CONVENTIONAL | MULTI-BRAND
LOW SILICATE FORMULA - PHOSPHATE FREE



CATEGORY	UNIV. – MULTI BRANDS	UNIV. – MULTI BRANDS	UNIV. – MULTI BRANDS	UNIV. – MULTI BRANDS	UNIV. EURO-ASIAN	UNIV. EURO-ASIAN
LIQUID COLOR	RED	GOLD	ORANGE	GREEN	BLUE	VIOLET-PINK
TECHNOLOGY	IAT - Inorganic Additive Technology	IAT - Inorganic Additive Technology	IAT - Inorganic Additive Technology	IAT - Inorganic Additive Technology	IAT - Inorganic Additive Technology	IAT - Inorganic Additive Technology
WARRANTY PERIOD (UP TO)	3-Year / 50,000 Miles	3-Year / 50,000 Miles	3-Year / 50,000 Miles	3-Year / 50,000 Miles	3-Year / 50,000 Miles	3-Year / 50,000 Miles
COMPATIBILITY And COLOR APPLICATION	- Formulated to work with All Makes, Models, and Colors of Antifreeze. - Recommended for all Heavy-Duty Trucks, Agricultural and Construction Equipment. Also, for Caterpillar, Chrysler, Cummins, Ford, Freightliner, GM, John Deere, Paccar, Lexus, Scion, and Toyota.	- Formulated to work with All Makes, Models, and Colors of Antifreeze. - Recommended for: Chrysler, Ford, and Lincoln.	- Formulated to work with All Makes, Models, and Colors of Antifreeze. - Recommended for: Chrysler, Ford, and GM.	- Formulated to work with All Makes, Models, and Colors of Antifreeze. - Recommended for: American: Chrysler, Ford, and GM. Asian: Hyundai, Honda, Infinity, Kia, Mazda, Mitsubishi, Nissan, Subaru, and Suzuki	- Formulated to work with all Makes, Models, and Colors of Antifreeze. - Recommended for: American: Dodge, Chrysler, Ford, and GM. European: BMW, Mini, Volkswagen, Land Rover, Jaguar, Fiat/Alfa Romeo, Porsche, Volvo, Saab, Audi. Asian: Acura, Toyota, Honda, Hyundai, Infinity, Mitsubishi, Nissan, Subaru, and Suzuki.	- Formulated to work with all Makes, Models, and Colors of Antifreeze. - Recommended for: European: Audi, BMW, Ferrari, Fiat/Alfa Romeo, Jaguar, Land Rover, Mini, Opel, Porsche, Saab, Volkswagen, and Volvo. Asian: Honda, Nissan, Hyundai, and Mitsubishi.
PERFORMANCE LEVEL (MEET AND EXCEEDS)	AAMV, ASTM D 4656, 4985, 6212, 3306 incl. D 4340, Caterpillar EC-15, Cummins 90T8-4, Detroit Diesel 7SE298, Freightliner, John Deere H24B1, H24C1, Mack Truck, PACCAR, GM1825M, Ford ESE-M97844-A, SAE J11034, Chrysler MS-7170	AAMV, ASTM D 4656, 4985, 6212, 3306 incl. D 4340, Caterpillar EC-15, Cummins 90T8-4, Detroit Diesel 7SE298, Freightliner, John Deere H24B1, H24C1, Mack Truck, PACCAR, GM1825M, Ford ESE-M97844-A, SAE J11034, Chrysler MS-7170	AAMV, ASTM D 4656, 4985, 6212, 3306 incl. D 4340, Caterpillar EC-15, Cummins 90T8-4, Detroit Diesel 7SE298, Freightliner, John Deere H24B1, H24C1, Mack Truck, PACCAR, GM1825M, Ford ESE-M97844-A, SAE J11034, Chrysler MS-7170	AAMV, ASTM D 4656, 4985, 6212, 3306 incl. D 4340, Caterpillar EC-15, Cummins 90T8-4, Detroit Diesel 7SE298, Freightliner, John Deere H24B1, H24C1, Mack Truck, PACCAR, GM1825M, Ford ESE-M97844-A, SAE J11034, Chrysler MS-7170	AAMV, ASTM D 4985, 6210, 3306 incl. D 4340, Federal Specification A-A-870, GM1825M and GM1899M, J.I. Case JIC501, MS-7170, SAE J11034, TCM RP329, TMC of ATA RP-302A	AAMV, ASTM D 3306 incl. D 4340, 4985, 6210, Federal Specification A-A-870, GM1825M, GM1899M, J.I. Case JIC501, MS-7170, SAE J11034, TCM RP329, TMC of ATA RP-302A

THIS IS STRICTLY A GUIDE. Always consult your vehicle manufacturer's owner's manual to determine the specific maintenance and changeover intervals recommended for your vehicle.
ETHYLENE GLYCOL BASED FLUIDS. CONTAINS BITTERING AGENT TO PREVENT HUMAN OR PET INGESTION.

FOR ALL MAKES, MODELS, AND COLORS OF ANTIFREEZE

U1P-Cool UltraCool Universal Antifreeze + Coolant (Choose your formula, available in READY TO USE - 50/50 Premixed and Concentrate) is a premium quality antifreeze + coolant, ethylene glycol-based, phosphate and amine free, designed to optimize engine longevity. For use in all makes of vehicles, from the smallest aluminum passenger car to the light-duty diesel engine made by manufacturers such as Chrysler, Ford, GM, Hyundai, Kia and many more requiring a low silicates green formula with inorganic additive technology (IAT).

UltraCool offers comprehensive protection against freezing and overheating, safeguarding your engine's performance. Premixed with a specialized inorganic additive, it fights corrosion, scaling, and rust, ensuring the cleanliness and proper functioning of cooling system components, including aluminum parts. Our IAT formula guarantees year-round protection for your entire cooling system up to 50,000 miles or 3 years, whichever comes first.

Highlights:

- Engineered to exceed original equipment manufacturer (OEM) requirements.
- Recommended use in American, Asian, and European automotive and light duty truck applications including newer hybrid vehicles.
- Meets or exceeds ASTM D3306 & D4985 for corrosion protection.




Universal PREMIXED 50/50	Code
UltraCool Antifreeze + Coolant PREMIXED 50/50 EURO-ASIAN BLUE	UL900
UltraCool Universal Antifreeze + Coolant PREMIXED 50/50 GOLD	UL901
UltraCool Antifreeze + Coolant PREMIXED 50/50 EURO-ASIAN VIOLET-PINK	UL902
UltraCool Universal Antifreeze + Coolant PREMIXED 50/50 GREEN	UL903
UltraCool Universal HEAVY-DUTY Antifreeze + Coolant PREMIXED 50/50 RED	UL904
UltraCool Universal Antifreeze + Coolant PREMIXED 50/50 ORANGE	UL905

Universal CONCENTRATE	Code
UltraCool Antifreeze + Coolant CONCENTRATE EURO-ASIAN BLUE	UL910
UltraCool Universal Antifreeze + Coolant CONCENTRATE GOLD	UL911
UltraCool Antifreeze + Coolant CONCENTRATE EURO-ASIAN VIOLET-PINK	UL912
UltraCool Universal Antifreeze + Coolant CONCENTRATE GREEN	UL913
UltraCool Universal HEAVY-DUTY Antifreeze + Coolant CONCENTRATE RED	UL914
UltraCool Universal Antifreeze + Coolant CONCENTRATE ORANGE	UL915

	Unit	Pack/Size	Dimensions	Unit Wt. lbs (Kg)	Units per Pallet	Pallet Weight*
Conc 50/50	Case	6/1 Gal	13L x 15.5W x 13.5H	54.9 (24.9)	36	1,976.40 (896.47)
	Drum	55 Gal	48L x 42W x 41H	526 (238.59)	4	2157.00 (978.39)
	Tote	265 Gal	48L x 40W x 46H	2364 (1072.29)	1	2364.00 (1072.29)
	Case	6/1 Gal	13L x 15.5W x 13.5H	59.4 (26.94)	36	2,138.40 (969.96)
	Drum	55 Gal	48L x 42W x 41H	392.5 (178)	4	2094.83 (950.2)
	Tote	265 Gal	48L x 40W x 46H	2465.89 (1118.50)	1	2465.89 (1118.5)



FREEZE POINT °F (°C): -34 (-36.66)
BOILING POINT °F (°C): 265 (128)
LOW SILICATE: 6038M

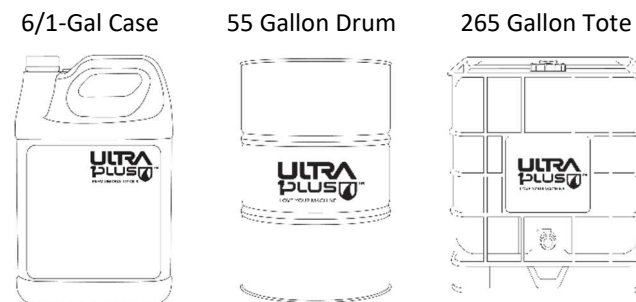

WARNING: California Proposition 65
www.p65warnings.ca.gov

