


Important Size and Installation-Tile in top




Standard plain edge drain with tile-in top

- Compatible with max tile thickness 12mm. Please check your tile before purchasing.

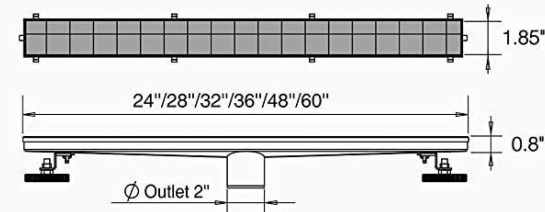


Side View

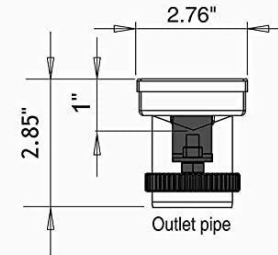


Appropriate Placement

Installation along the wall.



Span the **entire length** of the **wall** if possible. Barrier free installation for wheelchair.

Installation in the center



Replacing a traditional center drain, no need to move the waste plumbing.

DO NOT DO THIS !




In curbless showers, **DO NOT** placing the drain perpendicular to the entrance.

Maximum 2.5 GPM



Flow values of the shower fitting.

Recommend instillation (Sheet-type waterproofing)

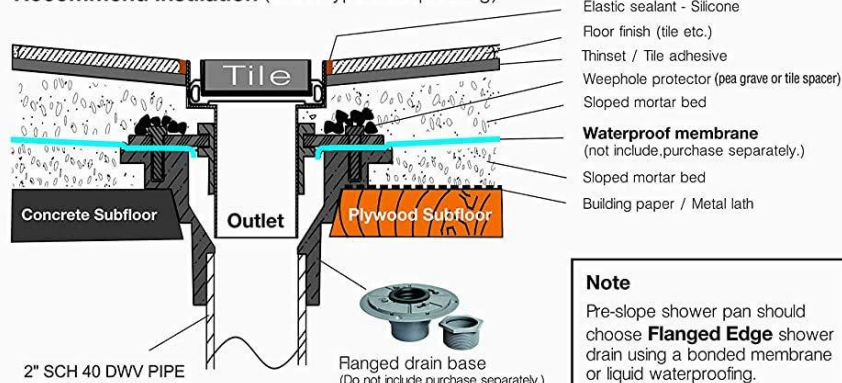

Note

Pre-slope shower pan should choose **Flanged Edge** shower drain using a bonded membrane or liquid waterproofing.

Whenever possible, hire a professional for the task, because it is a complicated process.

Neodrain[®]
Since 2006