


# QUICKLY & EASILY LEARN ALL ABOUT THE Freeze Miser®

LEARN NOW  
CLICK HERE  
OR SCAN

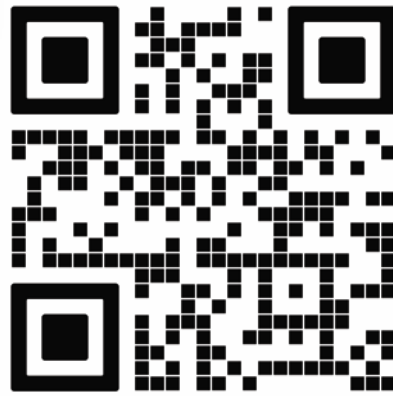

**PROVEN  
TECHNOLOGY!**

**2-YEAR  
WARRANTY**

**EASY TO INSTALL**

#### STEP 1

Hand-tighten the Freeze Miser® on to an outdoor faucet, hose, or float valve.

#### STEP 2

Turn the water supply valve to a fully open position. A minimum of 10 psi water pressure is required.

#### STEP 3

If placed on a hose (150 feet or less), keep the Freeze Miser® off the ground. This will ensure the Freeze Miser® only senses the temperature of the water in the hose.

Questions? Call 1 (833) 302-0147 or visit  
[www.FreezeMiser.com](http://www.FreezeMiser.com)

FOLLOW US ON

