



AG-TUF®/AG-TUF UV™

Corrugated PVC Liner Panel



Overview

Brighten the interior of structures and simplify maintenance. AG-TUF corrugated PVC liner panels are used to clad the interiors of agricultural and light industrial structures. From hog barns, dairy parlors, and poultry houses, to car washes, chemical processing plants, and fertilizer storage facilities, AG-TUF offers extended service in challenging environments.

In addition to AG-TUF for interior cladding, AG-TUF UV is available for outdoor applications and corrosive environments. Resistant to harsh chemicals, our panels can be frequently cleaned to facilitate maximum sanitary maintenance without premature wear and tear. AG-TUF panels are also easy to install and maintain while preserving an attractive glossy appearance for years.

www.palram.com/us

Main Benefits

- Surface is easy to clean/sanitize
- Excellent chemical resistance
- Resists emitted gasses in animal breeding areas
- Rust-proof and easy to maintain
- Excellent light reflectance
- Attractive high-gloss white finish
- Resists marking and scratching
- Non-flammable
- Ag-Tuf UV for corrosive environments and outdoor applications
- USDA/FDA Compliant
- 10-Year limited warranty for Ag-Tuf, 5-Year limited warranty for Ag-Tuf UV



Typical Applications

- Poultry Farms
- Fish Farms
- Pig Farms
- Dairy Parlors
- Loafing Sheds
- Warehouses & Industrial Buildings
- Barns
- Food Processing
- Meat Packing
- Fertilizer Storage
- Workshops
- Kennels
- Marinas
- Car & Truck Washes
- Salt Storage




Prefer a smooth PVC liner panel?

Bright white Duraclad interlocking liner panels feature a multiwall structure, resulting in a high level of rigidity and strength. Fast & easy to install, Duraclad is also available in white shiplap. Visit duracladpanels.com.


Product Availability

Standard Stock	AG-TUF	AG-TUF 9	AG-TUF UV
Panel Width	38"	38"	38"
Panel Length(s)	10'2", 12'2", 14'2", 16'4", 20'4"	8'2", 12'2", 16'4", 20'4"	12'2", 16'4", 20'4"
Thickness	0.032 in.	0.032 in.	0.039 in.
Standard Color	Bright White	Bright White	Bright White


Profiles



AG-Tuf 9 & AG-Tuf UV" Profile
(formerly Ag-Tuf Plus)

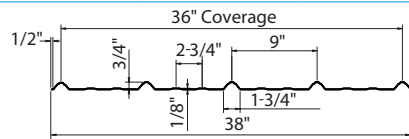

Ag-Tuf Available Trim Profiles

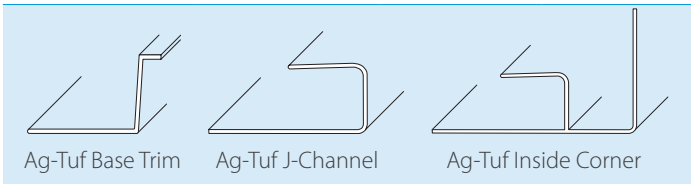

Special Orders are Also Available*

Width:	From 26" to 47.9"
Length:	Up to 242"
Thickness:	Up to 0.051"
Colors:	Dark Grey
Custom Profiles:	Available with minimum order requirements

* Special Orders available, but subject to surcharge and/or minimum order requirements.


Flammability

Standard	Classification*
ASTM D635-74	CC1
ASTM E84-01	Class A
CAN/ULC S102.2-07	Flame Spread <25 Smoke Developed <450

* May not apply to all thicknesses

Limited Warranty

Ag-Tuf carries a 10-Year Manufacturer's Limited Warranty, Ag-Tuf UV carries a 5-Year Limited Warranty. For warranty details, contact Palram, or visit www.palram.com/us/agtuf

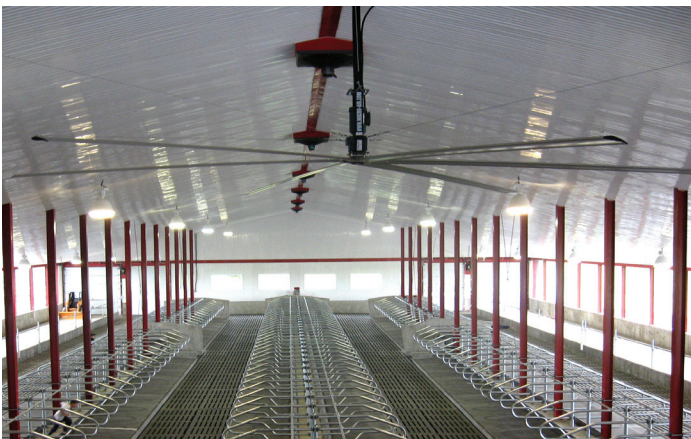

PALRAM AMERICAS
9735 Commerce Circle
Kutztown, PA, 19530 USA
800.999.9459
ContactUs.USA@palram.com
palram.com/us



Authorized Distributor

Inasmuch as Palram Americas has no control over the use (and/or installation method) to which others may put this material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make their own test to determine the suitability of the material for their own particular use. In the event of a warranty claim for product failure, Palram Americas reserves the right to inspect any or all of the sheets involved and the installation site itself while the sheets are still in their original position and have not been removed or moved or altered in any way.

© 2024 Palram Americas

