



MAX TIGHT SQUARE KNOT HORSE FENCE

Designed for the serious horseman, the Max Tight Square Knot Horse Fence is manufactured using the Max Tight Horse Safe Knot. This square knot provides extra vertical strength to withstand the impact of large animals. It also allows flexibility for installation on hilly terrain. Class I galvanized Horse Fence resists corrosion, resulting in a longer fence life. Continuous vertical and horizontal wires, wrapped in a horse-safe knot with a third wire provide the strength and rigidity as well as the safety needed for your prized animals.



MAX TIGHT SQUARE KNOT SHEEP & GOAT FENCE

Need a field fence with smaller and consistent spacing throughout to contain your sheep & goats and strength of the stiff stay knot? OKBRAND manufactures Max Tight Square Knot Sheep & Goat Fence with 4" x 4" spacing from top to bottom to confine your most stubborn animals.



As with all OKBRAND Max Tight products our Horse Fence and Sheep & Goat products have the added benefit of our unique "Versi-Tail" feature. This feature allows for easier installation by adding an 8" tail at the beginning of each roll and an 8" tail at each end. This feature eliminates the need to remove cross-wire staples to allow enough wire for tying corners or splicing rolls.

What do the numbers in the product description mean?

1972-4-12.5

<u>19</u>	<u>72"</u>	<u>4"</u>	<u>12.5</u>
Number Of Horizontal Wires	Fence Height	Stay opening	Filler wire gauge

MAX TIGHT SQUARE KNOT FIELD FENCE									
PRODUCT	NO HORIZ WIRES	FENCE HEIGHT	STAY OPENING	INSIDE WIRE GAUGE	TOP/BOTTOM GAUGE	ROLL LENGH	APPROX WEIGHT	ROLLS/PALLET	COATING
1036-2-12.5	10	36"	2"	12.5	10	100'	95	8	Class 1
1348-2-12.5	13	48"	2"	12.5	10	100'	124	8	Class 1
1660-2-12.5	16	60"	2"	12.5	10	100'	153	8	Class 1
1972-2-12.5	19	72"	2"	12.5	10	100'	181	8	Class 1
1348-2-12.5	13	48"	2"	12.5	10	200'	247	4	Class 1
1660-2-12.5	16	60"	2"	12.5	10	200'	304	4	Class 1
1348-2-12.5	13	48"	2"	12.5	10	300'	371	3	Class 1
1660-2-12.5	16	60"	2"	12.5	10	300'	452	3	Class 1
1348-4-12.5	13	48"	4"	12.5	10	330'	265	4	Class 1
1660-4-12.5	16	60"	4"	12.5	10	330'	322	4	Class 1
1972-4-12.5	19	72"	4"	12.5	10	330'		4	Class 1

For inquiries about special orders, feel free to contact our sales team for assistance and availability.


OKBRAND








Madill, Oklahoma EST. 1979

OKBRAND
MAX TIGHT
HORSE FENCE

12.5 GAUGE
LOW CARBON
GALVANIZED
SQUARE KNOT




Oklahoma Steel and Wire
1042 South 1st Street - Madill, Oklahoma 73446
800.654.4164
okbrand.com

Iowa Steel and Wire
1500 West Van Buren - Centerville, Iowa 52544

MAX TIGHT SQUARE KNOT

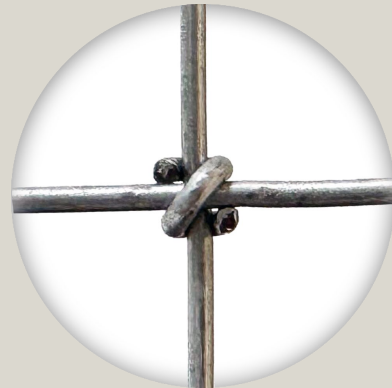

LOW CARBON SHEEP & GOAT HORSE FENCE

Oklahoma Steel & Wire
1042 South 1st Street
Madill, Oklahoma 73446
800.654.4164



okbrand.com

Iowa Steel & Wire
1500 West Van Buren
Centerville, Iowa 52544
800.325.5118