




TCW

TURBO RIM

HARD MATERIALS

300 Trade

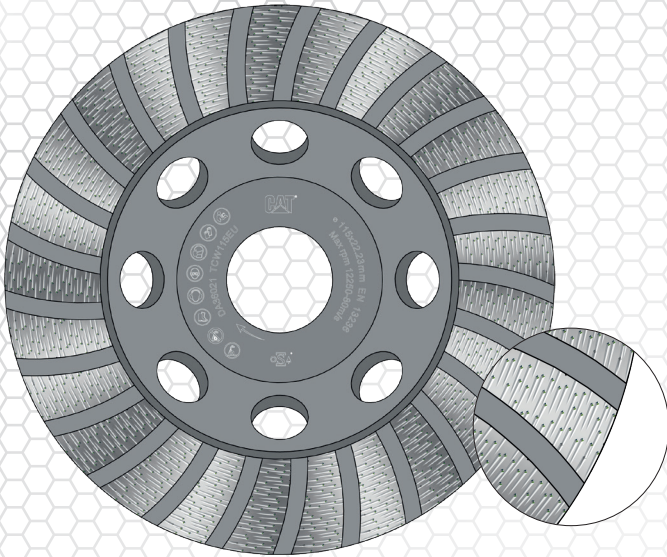

Cat® 300 Trade turbo cup wheel is engineered for building and tiling work for light to medium tidy up work. Designed to be used with angle grinders. The product is engineered with a premium fast medium aggressive bond with coarse 50 / 60 # mesh diamond grit. Manufactured from a single heavy duty fully ground steel core for strength and eliminates torque and open air ducting enables cooler operation providing faster stock removal and faster grinding. The perfect choice for the enthusiast / occasional user and those medium size jobs for users that want a good life and grinding speed.

ATTRIBUTES

- **FAST AGGRESSIVE ACTION**
- **LESS SWIRL MARKS ON APPLICATION SURFACE**
- **HIGH DIAMOND CONCENTRATION 50 / 60 # MESH GRIT**
- **BALANCED FOR LESS VIBRATION.**

APPLICATION

★★★★	CRITICALLY HARD AGGREGATE CONCRETE (FLINT, CHERT), HARD TO MEDIUM AGGREGATE CONCRETE (CHERT - TRAP ROCK - RIVER GRAVEL), MEDIUM AGGREGATE CONCRETE (TRAPROCK - QUARTZ), MEDIUM SOFT AGGREGATE CONCRETE (GRANITE - LIMESTONE), CONCRETE KERBS, CONCRETE SLABS, HARD LIMESTONE, LIMESTONE AGGREGATE CONCRETE, CONCRETE PAVIOURS, CONCRETE PIPE, SOFT FACING BRICKS, CONCRETE ROOF TILE, SOFT FACING BRICKS, CONCRETE WITH MEDIUM SHARP SAND, CONCRETE SCREED, PLASTER - GROUT.
★★★	GRANITE, QUARTZITE, CLASS A ENGINEERING BRICK 125 N/MM², CLASS A ENGINEERING BRICK 125 N/MM², REFRACTORY BRICK, HARD FACING BRICK, TRAVERTINE, PORPHYRY, CLASS B ENGINEERING BRICK 75N/MM², MEDIUM FACING BRICK, HARD SLATE, RIVER GRAVEL CONCRETE, LIGHT REINFORCED CONCRETE, BASALT, LIGHT REINFORCED CONCRETE LINTELS, FIBRE CEMENT BOARD, CONCRETE BLOCKS OVER 15N/MM², HARD SANDSTONE (FINE GRIT), SOFT SLATE, MARBLE, MEDIUM SANDSTONE (MEDIUM GRIT).
★★	INDIAN STONE (KOTA), SOFT SANDSTONE (COARSE GRIT), CONCRETE BLOCK UNDER 15N/MM².
★	GREEN CONCRETE UNIVERSAL, GREEN CONCRETE WITH VERY HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM HARD AGGREGATE, GREEN CONCRETE WITH MEDIUM SOFT AGGREGATE, LIGNACITE BLOCKS, LAVA ROCK, PUMICE.



DRY GRINDING



WET GRINDING

HARD CONCRETE AGREGADO DURO	SCREED CAPA DE MORTERO	HARD STONE PIEDRA DURA
CONCRETE SLABS HOJAS DE HORMIGON	PLASTER YESO	BRICKS LADRILLOS

PRODUCT		DIAMETER		SEGMENT HEIGHT		SEGMENT WIDTH		MAIN ARBOR - BORE		REDUCING RINGS INCLUDED		MACHINES USED
PART NO	CODE NO	MM	INCH	MM	INCH	MM	INCH	MM	INCH	MM	INCH	
DA36016	TCW100US	100	4	5	0.197	20	0.787	N/A	5/8" 11 Thread	N/A	N/A	
DA36017	TCW115US	115	4 1/2	5	0.197	20	0.787	N/A	5/8" 11 Thread	N/A	N/A	
DA36018	TCW125US	125	5	5	0.197	20	0.787	N/A	5/8" 11 Thread	N/A	N/A	
DA36019	TCW180US	180	7	5	0.197	20	0.787	N/A	5/8" 11 Thread	N/A	N/A	
DA36020	TCW100EU	100	4	5	0.197	20	0.787	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36021	TCW115EU	115	4 1/2	5	0.197	20	0.787	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36022	TCW125EU	125	5	5	0.197	20	0.787	22.23	7/8	22.23 - 15.88	7/8 - 5/8	
DA36023	TCW180EU	180	7	5	0.197	20	0.787	22.23	7/8	22.23 - 15.88	7/8 - 5/8	



WARNING: This product can expose you to "Nickel" which is known to the State of California to cause cancer and birth defects.
ADVERTENCIA: Este producto puede exponerlo a un "Níquel" que el Estado de California sabe que causa cáncer y defectos de nacimiento.
AVERTISSEMENT: ce produit peut vous exposer à un "Nickel" connu de l'Etat de Californie pour provoquer le cancer et des malformations congénitales. www.P65Warnings.ca.gov



© 2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission. H2 Diamond LLC is an authorized distributor of C6 Diamond LLC, global licensee for Diamond Tools for Caterpillar INC. Company Number 0803964397.

SILICA DUST: Workers who are exposed to respirable crystalline silica dust are at increased risk of developing serious silica-related diseases. It is necessary to use saws and other machinery that is equipped with an integrated water delivery system that continuously feeds water to the blade. Operate and maintain all tools in accordance with manufacturer's instructions to minimize dust emissions and always wear the correct ventilator. For more info visit: www.osha.gov/sites/default/files/publications/OSHA3681.pdf