



GXS11300R


11300 Watt Remote Control Portable Generator

- **Performance Series Engine:**
459cc OHV engine with Cast Iron Sleeve & Low Oil Shutdown
- **High Output:** 11,300 starting watts - 9,000 running watts on gasoline
- **Run Time:** 9.5-gallon fuel tank for extended run time of up to 18 hours at 25% load
- **Digital Data Center:** For quick and easy access to real-time running data; Voltage (V), Frequency (Hz), Total Run Time(Hour)
- **Rubber Outlet Covers:** Help guard against moisture, dust, and debris
- **Heavy Duty Frame Construction:** Built tough with durable automotive style finish
- **Portable Design:** Easy to transport with folding handle and wheels - included
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels
- **Simple Starting:** Recoil, electric and remote start - fob & battery included



GXS11300R

Multi-Feature Panel with
Outlet Covers

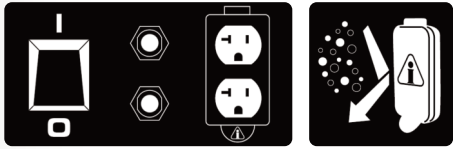

Heavy Duty
Frame




11.0" Flat
Free Wheel



Recoil, Electric &
Remote Start 459cc Engine



9.5 Gal Tank with Built-In Gauge
18.0 Hour Runtime

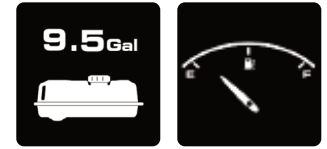

Integrated
Folding Handle



Brushed Alternator
With AVR



GXS11300R

5VDC Outlets (2):
USB-A 3.6A, USB-C 3.0A



Data Center
Displays;
Voltage,
Frequency,
Hours

VOLTS - HZ - HOUR
8888

14-50R:
50A, 120/240V





L5-30R:
120VAC 30A



CO Sensor:
Auto Shutdown



Push Button
Electric Start

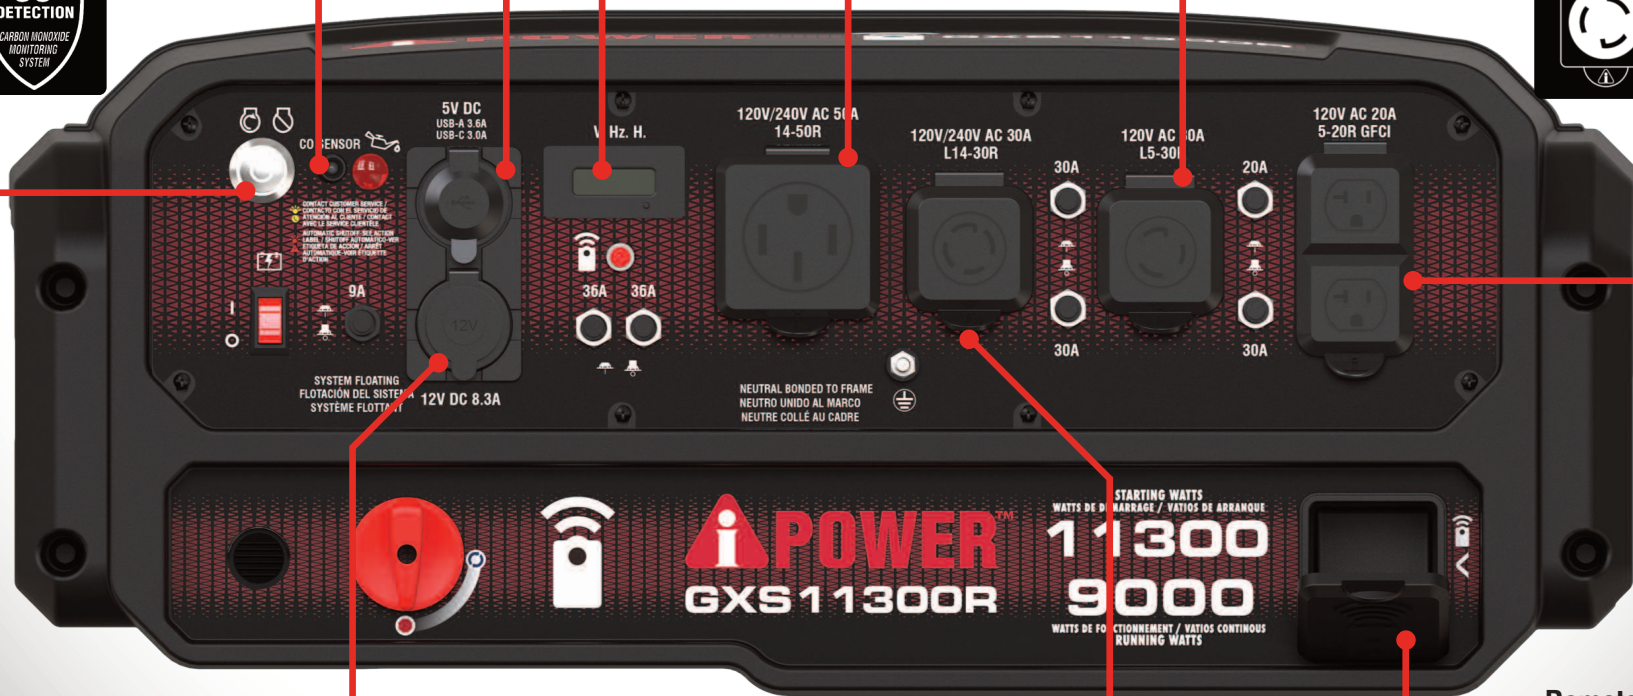

GFCI AC Outlet:
120VAC 5-20R
20A Duplex



DC Outlet:
8.3A, 12VDC
Automotive Outlet



L14-30R:
120/240VAC 30A



Remote
Storage



POWER
GXS11300R


STARTING WATTS
WATTS DE ARRANQUE / VATIOS DE ARRANQUE
11300

WATTS DE FUNCIONAMIENTO / VATIOS CONTINUOS
RUNNING WATTS
9000

GXS11300R - REMOTE START PORTABLE GENERATOR

| | |
|---------------------------------|---|
| Starting/Running Watts (Gas) | 11300 / 9000W |
| Certifications | EPA |
| CO Monitor | Yes - Auto Shutdown |
| AC Voltage | 120 / 240V |
| Rated Speed/Frequency | 3600rpm/60Hz |
| Total Harmonic Distortion (THD) | Standard |
| Grounding System | Neutral Bonded to Frame |
| Noise Level (dB) | 76 |
| Engine Type | Single Cylinder 459cc - 4 Stroke OHV |
| Starting System | Recoil Start - Electric Start - Remote Start |
| Low Oil Shutdown | Yes |
| Cast Iron Sleeve | Yes |
| Fuel Type | Gasoline |
| Oil Type and Capacity | 10W-30 - 33.8 fl.oz / 1000 ml / 1.0 L |
| Alternator Type | Brushed with AVR |
| Tank (Gas) | 9.5 Gal |
| Runtime @25% Load (Gas) | Up to 18 Hour |
| Handle | Folding U Shape |
| Wheel | Flat Free 11.0" |
| AC Outlets | 1x5-20R Duplex GFCI (20A, 120V) - 1xL5-30R (30A, 120V) 1xL14-30R (30A, 120/240V) - 1x14-50R (50A, 120/240V) |
| DC Outlets | 1x8.3A (12VDC) Automotive Outlet 2xUSB (5V): USB-A 3.6A + USB-C 3.0A |
| Voltage Selector Switch | Yes |
| Data Center | Yes; Voltage (V), Frequency (Hz), Total Run Time(Hour) |
| Included | Oil, Funnel, Tool Kit, 12VDC Battery Charging Cable, Battery, Remote Control Fob, Manual, Quick Start Guide, 30A RV Adapter |
| Warranty (Residential) | 3 Year |
| Unit LxWxH | 28.0 x 28.8 x 26.7 inch / 71.1 x 73.1 x 67.8 cm |
| Carton LxWxH | 28.9 x 23.4 x 24.2 inch / 73.5 x 59.5 x 61.5 cm |
| Unit Weight | 216.1 lbs / 98.0 kg |
| Shipping Weight | 224.9 lbs / 102.0 kg |
| UPC | 850016881717 |

GXS11300R

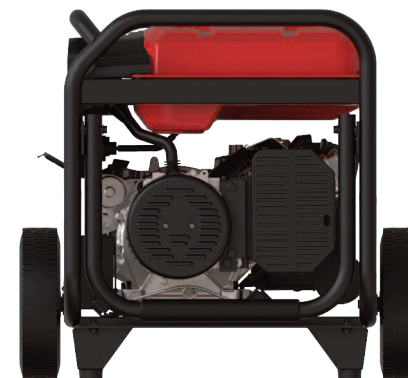

GXS11300R



Inclusions



www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240



Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

